CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity Server rx5670 (1500 MHz, Itanium 2)

SPECint_rate2000 = 15.2

SPECint_rate_base2000 = 15.2

SPEC license #: 3 | Tested by: HP Richardson | Test date: Jul-2003 | Hardware Avail: Sep-2003 | Software Avail: Sep-2003

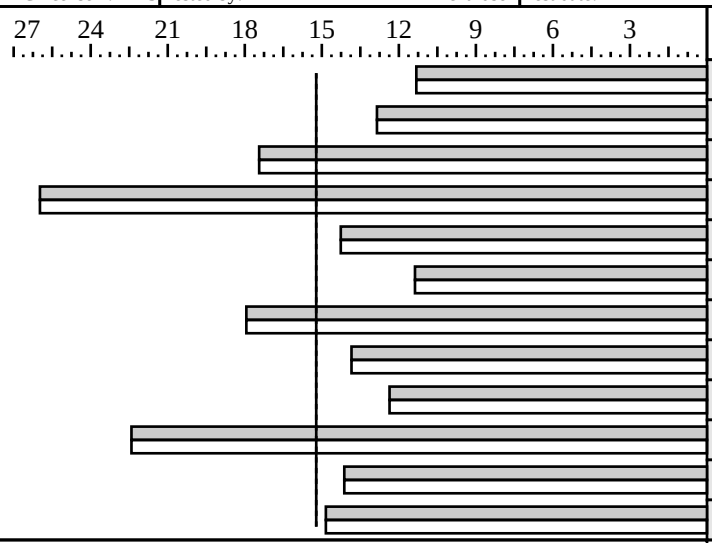

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	143	11.3	1	143	11.3
175.vpr	1	126	12.9	1	126	12.9
176.gcc	1	73.2	17.4	1	73.2	17.4
181.mcf	1	80.4	26.0	1	80.4	26.0
186.crafty	1	81.3	14.3	1	81.3	14.3
197.parser	1	184	11.4	1	184	11.4
252.eon	1	84.1	17.9	1	84.1	17.9
253.perlbmk	1	151	13.8	1	151	13.8
254.gap	1	103	12.4	1	103	12.4
255.vortex	1	98.3	22.4	1	98.3	22.4
256.bzip2	1	123	14.1	1	123	14.1
300.twolf	1	234	14.8	1	234	14.8

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1500
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-4
Parallel:	no
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	6.0MB (on chip) per CPU
Other Cache:	N/A
Memory:	24GB (48 x 512MB DIMMs on 2 memory carriers)
Disk Subsystem:	1x36GB 15k RPM SCSI disk
Other Hardware:	N/A

Software

Operating System:	HPUX11i-TCOE B.11.23
Compiler:	HP C/ANSI C Compiler B.11.23
	HP aC++ Compiler B.11.23
File System:	vxfs
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags
176.gcc     : -DHOST_WORDS_BIG_ENDIAN
181.mcf     : -DWANT_STDC_PROTO
186.crafty  : -DHP
252.eon     : -I. -DFMAX_IS_DOUBLE -DNDEBUG
              -DSPEC_CPU2000_LP64 (because of 64-bit compile)
253.perlbmk : -DSPEC_CPU2000_HP
254.gap     : -DSPEC_CPU2000_HP -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO
              -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Base Flags
  all       : +Oprofile=collect:all/+Oprofile=use
  C         : +Ofaster -exec +Odatalayout
  C++       : +Ofaster +inline_level 2 -minshared +DD64

Peak Flags
  same as baseline (basepeak=true set globally)


Kernel Tunables:
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    maxdsiz             0x7b03a000
    maxdsiz_64bit    0x04000000000
    maxssiz             0x10000000
    maxssiz_64bit       0x40000000
    vps_ceiling              16384
    vps_pagesize              4096
    swapmem_on                   0
    dbc_max_pct                 20
    dbc_min_pct                 20

  Note:
    EFI shell utility 'cpuconfig' used
    to deconfigure processors if necessary
```