CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade 2500 (1.28GHz)

SPECint_rate2000 = 8.07

SPECint_rate_base2000 = 7.01

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Aug-2003 | Hardware Avail: Dec-2003 | Software Avail: May-2003

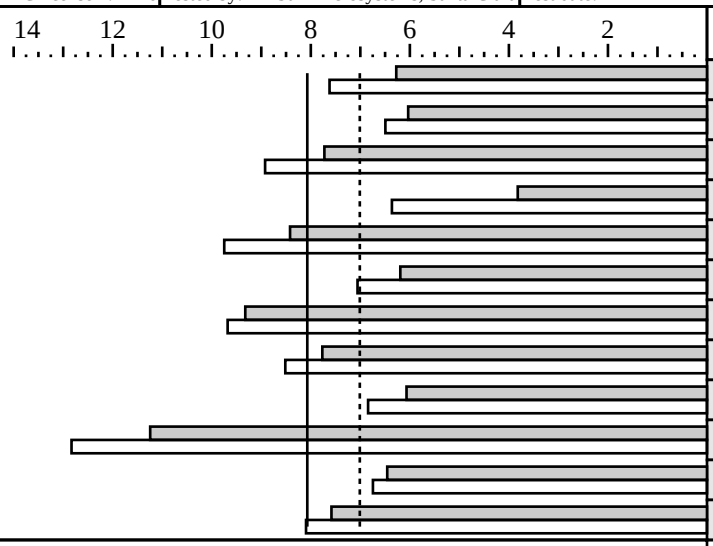

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	259	6.27	1	213	7.62
175.vpr	1	269	6.03	1	250	6.49
176.gcc	1	165	7.73	1	143	8.92
181.mcf	1	546	3.82	1	328	6.36
186.crafty	1	138	8.42	1	119	9.75
197.parser	1	337	6.19	1	296	7.06
252.eon	1	162	9.32	1	156	9.68
253.perlbmk	1	269	7.77	1	245	8.51
254.gap	1	210	6.07	1	186	6.84
255.vortex	1	196	11.2	1	172	12.8
256.bzip2	1	269	6.46	1	258	6.75
300.twolf	1	459	7.58	1	430	8.10

Hardware

CPU:	UltraSPARC IIIi
CPU MHz:	1280
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	1MB(I+D) on chip
L3 Cache:	None
Other Cache:	None
Memory:	4GB (4x1GB DIMM)
Disk Subsystem:	1x36GB 10K RPM SCSI
Other Hardware:	None

Software

Operating System:	Solaris 8 HW 5/03
Compiler:	Sun ONE Studio 8 Sun Performance Library 8
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

Integer base flags:
     -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO5 -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1
              -W2,-Apf:llist=3:noinnerllist
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
              Feedback adds -xlinkopt in PASS2
 197.parser:  -fast -xipo=2 -xalias_level=strong
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:       -fast -xipo=2 -xalias_level=compatible -noex
                -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
 253.perlbmk: -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
                -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
                -Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap:       -fast -xipo=2 -xalias_level=strong -xvector
                -xprefetch_level=3 -W2,-Abcopy
 255.vortex:    -fast -xrestrict -xipo=2
                -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
                -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
                -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:     -fast -xipo -xalias_level=strong -xrestrict
                -Wc,-Qeps:enabled=1
 300.twolf:     -fast -xalias_level=strong -xsafe=mem -xipo=2
                -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:     -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:  -DSUN
 252.eon:     -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap:     -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):
 autoup=900
 tune_t_fsflushr=1

System Settings:
 2nd cpu physically removed from system
```