CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity Server rx5670 (1300 MHz, Itanium 2)

SPECint_rate2000 = 12.4

SPECint_rate_base2000 = 12.2

SPEC license #: 3 | Tested by: HP Richardson | Test date: Oct-2003 | Hardware Avail: Sep-2003 | Software Avail: Sep-2003

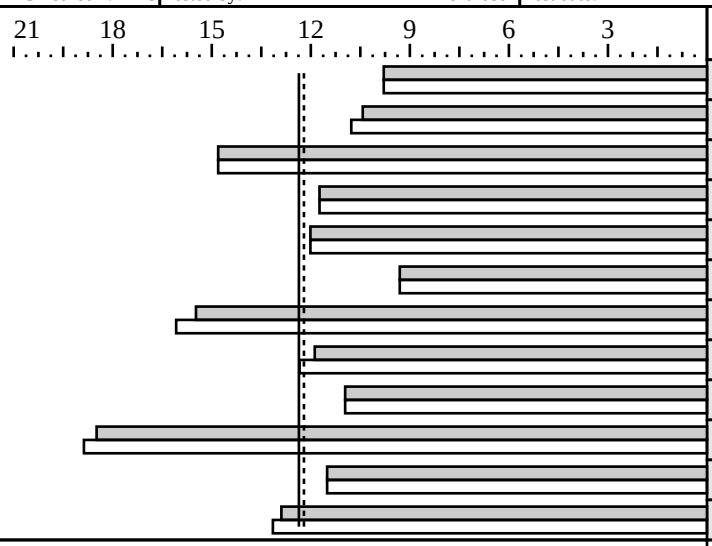

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	166	9.79	1	166	9.79
175.vpr	1	156	10.4	1	151	10.8
176.gcc	1	86.2	14.8	1	86.2	14.8
181.mcf	1	178	11.7	1	178	11.7
186.crafty	1	96.6	12.0	1	96.6	12.0
197.parser	1	224	9.31	1	224	9.31
252.eon	1	97.4	15.5	1	93.8	16.1
253.perlbmk	1	176	11.9	1	169	12.3
254.gap	1	116	11.0	1	116	11.0
255.vortex	1	119	18.5	1	117	18.9
256.bzip2	1	151	11.5	1	151	11.5
300.twolf	1	270	12.9	1	265	13.1

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-4
Parallel:	no
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	3.0MB (on chip) per CPU
Other Cache:	N/A
Memory:	24GB (12 x 512MB DIMMs on 2 carriers)
Disk Subsystem:	1x36GB 15k RPM SCSI disk
Other Hardware:	N/A

Software

Operating System:	HPUX11i-TCOE B.11.23
Compiler:	HP C/ANSI C Compiler B.11.23 HP aC++ Compiler B.11.23 PHSS_29655 aC++ Compiler PHSS_29656 HP C Compiler PHSS_29657 u2comp/be/plugin library Patch PHSS_29658 Aries
File System:	vxfs
System State:	Multi-user

Notes/Tuning Information

```
  Portability Flags
  176.gcc    : -DHOST_WORDS_BIG_ENDIAN
  186.crafty : -DHP
  252.eon    : -DFMAX_IS_DOUBLE
  253.perlbmk: -DSPEC_CPU2000_HP
  254.gap    : -DSPEC_CPU2000_HP -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO
               -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

 Base Flags
  PBO        : +Oprofile=collect:all/+Oprofile=use
  C          : PBO +Ofaster -exec +Odatalayout
  C++        : PBO +Ofaster +inline_level 2 -minshared

 Peak Flags
  164.gzip   : basepeak=true
  175.vpr    : PBO +Ofaster +Odatalayout +Onorecovery
                 +Onoptrs_to_globals -exec
               LIBS = -Wl,-aarchive_shared -Bprotected
  176.gcc    : basepeak=true
  181.mfc    : basepeak=true
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
186.crafty : basepeak=true
197.parser : basepeak=true
252.eon    : PBO +Ofaster +Odatalayout +Otype_safety=ansi
               +inline_level 2 -minshared
253.perlbmk: PBO +Ofaster +Odatalayout +Onoptrs_to_globals -exec
             LIBS = -Wl,-aarchive_shared -Bprotected_def fastmem.o
254.gap    : basepeak=true
255.vortex : PBO +Ofaster +Odatalayout +Onorecovery
               +Onoptrs_to_globals -exec
             LIBS = -Wl,-aarchive_shared -Bprotected
256.bzip2  : basepeak=true
300.twolf  : PBO +Ofaster +Odatalayout +Onoptrs_to_globals -exec
             LIBS = -Wl,-aarchive_shared -Bprotected_data effmem.o

Kernel Tunables:
  maxdsiz            0x7b03a000
  maxdsiz_64bit   0x04000000000
  maxssiz            0x10000000
  maxssiz_64bit      0x40000000
  vps_ceiling             16384
  vps_pagesize             4096
  swapmem_on                  0
  dbc_max_pct                20
  dbc_min_pct                20

Note:
  EFI shell utility 'cpuconfig' used
  to deconfigure processors if necessary
```