CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx8620 (1300 MHz Itanium 2)

SPECfp_rate2000 = 207

SPECfp_rate_base2000 = 190

SPEC license #: 3 | Tested by: HP Richardson | Test date: Nov-2003 | Hardware Avail: Nov-2003 | Software Avail: Oct-2003

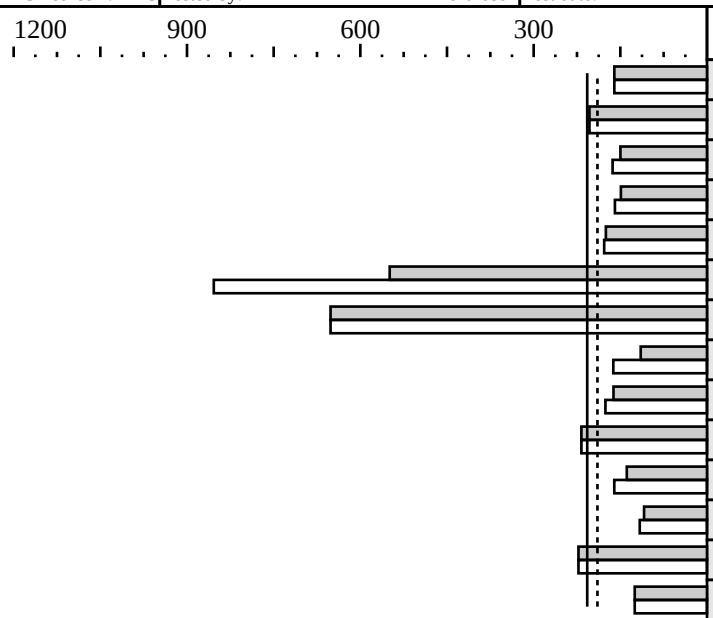

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	16	185	160	16	185	160
171.swim	16	283	203	16	283	203
172.mgrid	16	223	150	16	204	163
173.applu	16	262	149	16	245	159
177.mesa	16	148	175	16	146	178
178.galgel	16	98.0	549	16	63.1	854
179.art	16	74.1	652	16	74.1	652
183.equake	16	210	115	16	149	162
187.facerec	16	218	162	16	201	176
188.ammp	16	188	217	16	188	217
189.lucas	16	267	139	16	231	160
191.fma3d	16	358	109	16	335	116
200.sixtrack	16	91.8	222	16	91.8	222
301.apsi	16	386	125	16	386	125

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	2,4,6,8,10,12,14,16
Parallel:	no
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	3.0MB (on chip) per CPU
Other Cache:	N/A
Memory:	32GB (64 * 512MB DIMMs)
Disk Subsystem:	10x36GB 10K rpm SCSI (striped)
Other Hardware:	N/A

Software

Operating System:	HPUX11i-TCOE B.11.23
Compiler:	HP C/ANSI C Compiler A.05.52 HP Fortran90 Compiler B.11.23
File System:	vxfs
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags
  178.galgel: +source=fixed

Base Flags
  f90      : +Oprofile=collect:all/+Oprofile=use +Ofaster -minshared
  C        : +Oprofile=collect:all/+Oprofile=use +Ofaster +Otype_safety=ansi -exec

Peak Flags:

  168.wupwise   : basepeak=true
  171.swim      : basepeak=true
  172.mgrid     : +Ofaster -minshared +Oprefetch_latency=1280
  173.applu     : +Ofast +O3 -minshared
  177.mesa      : +Oprofile=collect:all/+Oprofile=use +Ofaster +Otype_safety=ansi
                  -exec +Oprefetch_latency=1280
  178.galgel    : +Oprofile=collect:all/+Oprofile=use +Ofast +Onoptrs_to_globals
                  -minshared +O3 +Oloop_unroll=11 +DD64
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                  RM_SOURCES = lapak.f90 LIBS = -llapack
    179.art       : basepeak=true
    183.equake    : +Oprofile=collect:all/+Oprofile=use +Ofaster +Onorecovery
                    +Onoptrs_to_globals +Otype_safety=strong -exec
                    LIBS = -Bprotected /opt/langtools/lib/hpux32/effmem.o
    187.facerec   : +Ofast +Onoptrs_to_globals -minshared +O3 +Oloop_unroll=2
    188.ammp      : basepeak=true
    189.lucas     : +Ofast +Onoptrs_to_globals -minshared +O3
    191.fma3d     : +Oprofile=collect:all/+Oprofile=use +Ofast +Onoptrs_to_globals
                    -minshared +O3
    200.sixtrack  : basepeak=true
    301.apsi      : basepeak=true

  Kernel Tunables:
    dbc_max_pct=20
    dbc_min_pct=20
    maxdsiz=3221225472
    maxssiz=401604608
    maxdsiz_64bit=4396972761584
    maxssiz_64bit=1073741824
    vps_pagesize=4096
    vps_ceiling=16384

  The system under test had the HP-UX 11i v2 (version 11.23)
    Technical Computing Operating Environment and compilers
    installed, with the following patches applied:

    PHSS_29655  aC++ compiler (A.05.52)
    PHSS_29656  HP C Compiler (A.05.52)
    PHSS_29657  u2comp/be/plugin library Patch
    PHSS_29663  Fortran Product Patch, v2.7 to v2.7.2

  Other notes:

    System was configured with 1/2 of memory interleaved and
      1/2 of memory local to each cell

    System configured as a single partition with 4 cells and
      4 processors per cell

    Processes were assigned to localities using the
      HP-UX mpsched utility

    Filesystem used for spec runs mounted "tmplog"
```