CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V1280 (1200MHz)

SPECint_rate2000 = 91.6

SPECint_rate_base2000 = 81.4

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Jan-2004 | Hardware Avail: Dec-2003 | Software Avail: Dec-2003

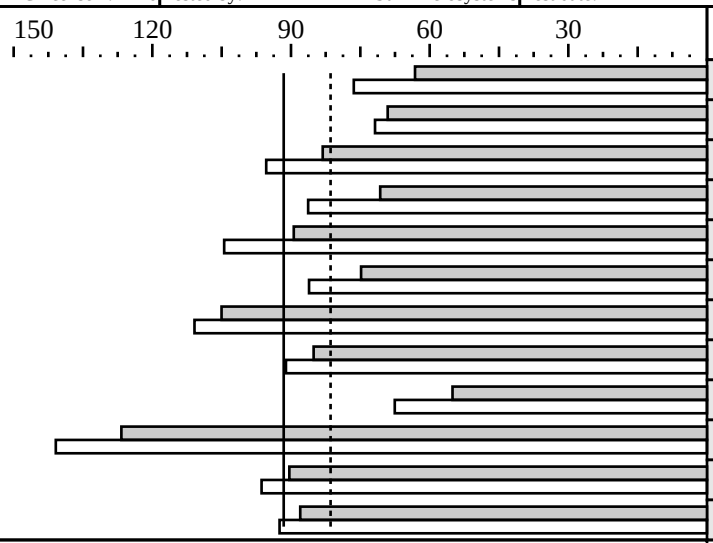

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	12	309	63.2	12	255	76.4
175.vpr	12	282	69.1	12	271	71.8
176.gcc	12	184	83.1	12	161	95.4
181.mcf	12	354	70.7	12	290	86.3
186.crafty	12	156	89.4	12	133	104
197.parser	12	335	74.8	12	291	86.1
252.eon	12	172	105	12	163	111
253.perlbmk	12	294	85.1	12	275	91.1
254.gap	12	278	55.1	12	227	67.6
255.vortex	12	209	127	12	188	141
256.bzip2	12	231	90.4	12	217	96.4
300.twolf	12	475	88.0	12	452	92.5

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	12 cores, 12 chips, 1 core/chip
CPU(s) orderable:	4,8,12
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	24GB 16-way interleaved
Disk Subsystem:	1 x 36GB FUJITSU MAN3367M SUN36G
Other Hardware:	None

Software

Operating System:	Solaris 9 12/03
Compiler:	Sun ONE Studio 8 Sun Performance Library 8
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Integer base flags:
     -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO4  -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
              Feedback adds -xlinkopt in PASS2
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 197.parser:  -fast -xipo=2 -xalias_level=strong
              -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:     -fast -xipo=2 -xalias_level=compatible -noex
              -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
 253.perlbmk: -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
              -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
              -Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap:     -fast -xipo=2 -xalias_level=strong -xvector
              -xprefetch_level=3 -W2,-Abcopy
 255.vortex:  -fast -xrestrict -xipo=2
              -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
              -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:   -fast -xipo -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1
 300.twolf:   -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:     -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:  -DSUN
 252.eon:     -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap:     -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
 autoup=900
 tune_t_fsflushr=1
Processes were bound to CPUs using submit=pbind
```