CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D875PBZ motherboard (AA-301)(2.8E GHz, Pentium 4 Processor with Hyper-Threading Technology)

SPECfp2000 = 1328

SPECfp_base2000 = 1325

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jan-2004 | Hardware Avail: Feb-2004 | Software Avail: Dec-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	78.4	2041	78.3	2043
171.swim	3100	150	2067	150	2069
172.mgrid	1800	158	1143	158	1143
173.applu	2100	169	1242	165	1275
177.mesa	1400	112	1245	112	1246
178.galgel	2900	132	2189	132	2191
179.art	2600	210	1241	214	1215
183.equake	1300	83.9	1549	83.8	1551
187.facerec	1900	112	1700	112	1699
188.ammp	2200	238	925	237	927
189.lucas	2000	117	1705	117	1704
191.fma3d	2100	169	1245	169	1245
200.sixtrack	1100	218	505	215	512
301.apsi	2600	267	975	267	975

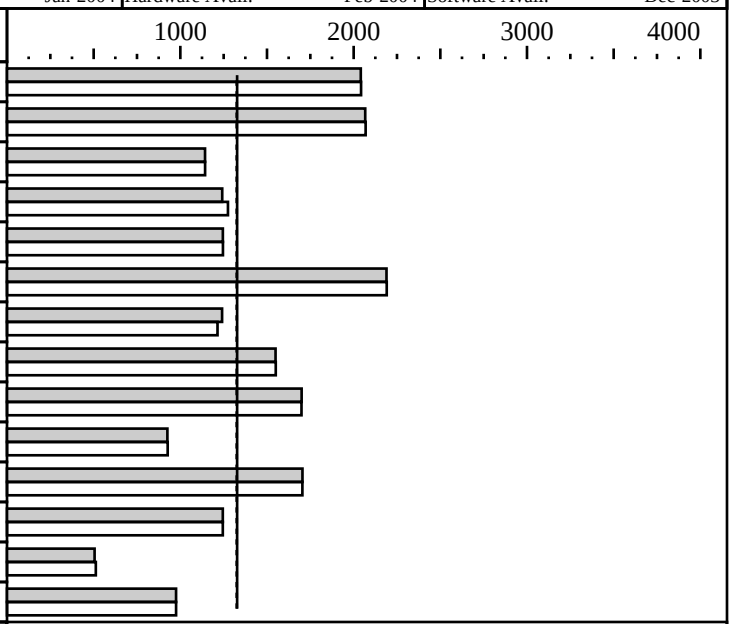

Hardware

CPU:	Intel Pentium 4 Processor with Hyper-Threading Technology(2.8E GHz, 800 MHz bus)
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	1MB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1 GB(2 512MB PC3200 Samsung Double-sided CL3-3-3 DIMMs)
Disk Subsystem:	Seagate ST3160023AS 160 GB Serial ATA (7200 RPM, 8MB cache)
Other Hardware:	None

Software

Operating System:	Windows XP Professional Service Pack 1a
Compiler:	Intel C++ and Fortran Compiler 8.0 Build 20031017Z Microsoft Visual Studio .Net 7.0(for libraries) MicroQuill SmartHeap library V6.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
ONESTEP=yes for all base and peak runs  +FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use (Qxp not used in PASS1)
Base tuning:  -QxP -fast -Qansi_alias +FDO
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -QxP -fast -Qansi_alias +FDO
171.swim:     -QxP -fast -Qansi_alias +FDO
172.mgrid:    -QxP -fast -Qansi_alias +FDO
173.applu:    -QxP -fast -Qscalar_rep- -Qauto  +FDO
177.mesa:     -QxP -fast -Oa -Qscalar_rep- +FDO
178.galgel:   -QxP -fast -Qansi_alias +FDO
179.art:      -Oa -Qipo -Qunroll4 -Zp4
183.equake:   -QxP -Oa -Qrcd -Qipo +FDO
187.facerec:  -QxP -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -Oa -QxP
189.lucas:    -QxP -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

200.sixtrack: -Qipo -QxP +FDO
301.apsi: -QxP -fast +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1
Product description located as of 9/2003:
http://developer.intel.com/design/motherbd/bz/index.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://www.intel.com/cd/channel/reseller/asmo-na/eng/products/box_desktop_boards/p4_boards/p4_dsk_board_d875pbz/index.htm
The system bus runs at 800 MHz
shlW32M.lib is the SmartHeap library V6.0 from http://www.microquill.com/smartheap/index.html
An AGP video card is installed and Hyper-Threading Technologyis enabled