CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

ION Computer Systems

SR2300WV2 (3.2GHz Xeon processor w. 2MB L3 cache)

SPECint2000 = 1493

SPECint_base2000 = 1490

SPEC license #: 2697 | Tested by: ION | Test date: Feb-2004 | Hardware Avail: Feb-2004 | Software Avail: Jan-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	108	1297	108	1298
175.vpr	1400	123	1140	123	1140
176.gcc	1100	61.5	1788	61.5	1788
181.mcf	1800	131	1373	131	1373
186.crafty	1000	80.6	1241	80.2	1247
197.parser	1800	139	1297	139	1297
252.eon	1300	85.3	1524	85.3	1524
253.perlbmk	1800	116	1545	116	1545
254.gap	1100	68.9	1596	68.9	1596
255.vortex	1900	75.9	2502	75.9	2502
256.bzip2	1500	118	1273	115	1306
300.twolf	3000	175	1711	176	1702

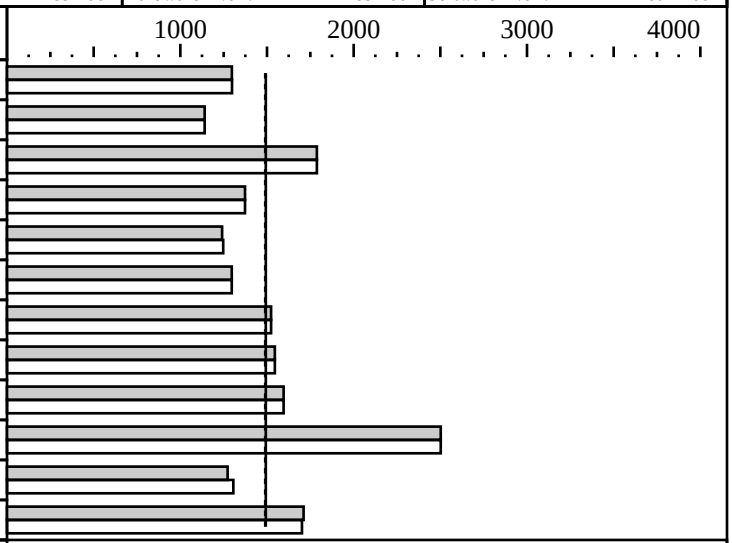

Hardware

CPU:	Intel Xeon processor, 533MHz system bus
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	No
Primary Cache:	12K(I) micro-ops + 8KB(D) on chip
Secondary Cache:	512KB(I+D) on chip
L3 Cache:	2048KB(I+D) on chip
Other Cache:	None
Memory:	2 GB (2x1GB 2-2-2 DIMMs)
Disk Subsystem:	1x 80GB IDE
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux ES release 3
Compiler:	Intel(R) C++ Compiler for Linux 8.0 (Build 20031231Z)
File System:	ext2
System State:	Multi-user, 2.4.21 smp kernel

Notes/Tuning Information

```
Only 1 processor installed
HyperThreading disabled in BIOS

Portability Flags:
       176.gcc: -Dalloca=_alloca -DUSG
    186.crafty: -DLINUX_i386
       252.eon: -DHAS_ERRLIST
       252.eon: srcalt=fmax_errno
   253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22
       254.gap: -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
    255.vortex: srcalt=closed_files

INT Baseline optimization flags:
    C programs: PASS1= -xN -prof_gen PASS2= -xN -ipo -O3 -prof_use
  C++ programs: PASS1= -xN -prof_gen PASS2= -xN -ipo -O3 -prof_use
INT Peak optimization flags:
      164.gzip: PASS1= -xN -prof_gen PASS2= -xN -ipo -Oa -O3 -prof_use
       175.vpr: basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    176.gcc: basepeak=yes
    181.mcf: basepeak=yes
 186.crafty: PASS1= -xN -prof_gen PASS2= -xN -ipo -Oa -O3 -prof_use
 197.parser: basepeak=yes
    252.eon: basepeak=yes
253.perlbmk: basepeak=yes
    254.gap: basepeak=yes
 255.vortex: basepeak=yes
  256.bzip2: PASS1= -xN -prof_gen PASS2= -xN -ipo -Oa -O3 -unroll1 -prof_use
  300.twolf: PASS1= -xN -prof_gen PASS2= -xN -ipo -Oa -O3 -prof_use
```