CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D875PBZ motherboard (AA-301) (3.2E GHz, Pentium 4 Processor with Hyper-Threading Technology)

SPECint2000 = 1421

SPECint_base2000 = 1363

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jan-2004 | Hardware Avail: Feb-2004 | Software Avail: Dec-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	131	1065	131	1065
175.vpr	1400	148	946	148	947
176.gcc	1100	63.9	1720	63.6	1730
181.mcf	1800	146	1231	146	1234
186.crafty	1000	84.4	1185	84.4	1185
197.parser	1800	144	1247	144	1247
252.eon	1300	83.2	1562	69.8	1861
253.perlbmk	1800	119	1514	107	1682
254.gap	1100	64.3	1711	64.2	1712
255.vortex	1900	77.9	2438	77.9	2438
256.bzip2	1500	147	1022	143	1050
300.twolf	3000	232	1294	194	1549

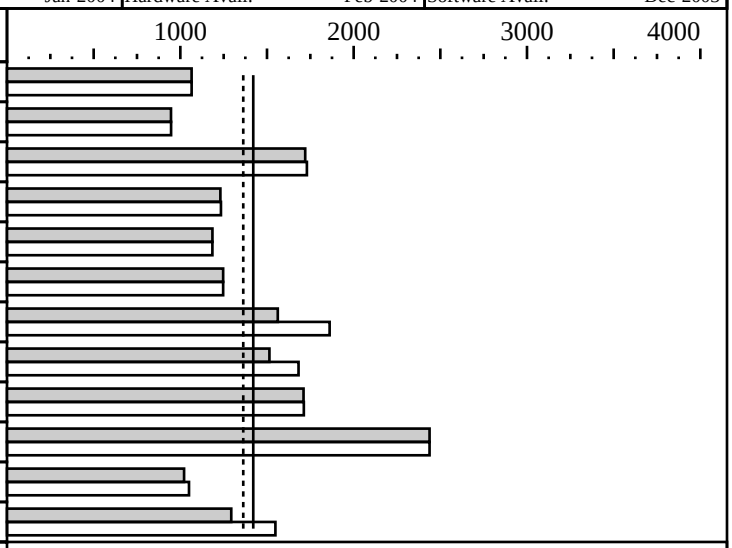

Hardware

CPU:	Intel Pentium 4 Processor with Hyper-Threading Technology(3.2E GHz, 800 MHz bus)
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	1MB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1 GB(2 512MB PC3200 Samsung Double-sided CL3-3-3 DIMMs)
Disk Subsystem:	Seagate ST3160023AS 160 GB Serial ATA (7200 RPM, 8MB cache)
Other Hardware:	None

Software

Operating System:	Windows XP Professional Service Pack 1a
Compiler:	Intel C++ Compiler 8.0 Build 20031017Z Microsoft Visual Studio .Net 7.0(for libraries) MicroQuill SmartHeap library V6.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use (-QxP not used in PASS1)
Base tuning for C programs:   -QxP -fast -Qansi_alias +FDO
Base tuning for C++ programs: -QxP -fast -GX -GR
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -QxP -fast -Qansi_alias -Oa  +FDO
175.vpr:      -QxP -fast -Qansi_alias +FDO
176.gcc:      -QxP -fast -Qansi_alias +FDO
181.mcf:      -QxP -fast -Qansi_alias +FDO
186.crafty:   -QxP -fast -Qansi_alias -Oa +FDO
197.parser:   -QxP -fast -Qansi_alias  +FDO
252.eon:      -QxP -O2 -Qipo +FDO
253.perlbmk:  -QxP -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      -QxP -fast -Qunroll1 -Zp8 +FDO
255.vortex    basepeak=yes
256.bzip2:    -fast -Oa -Qunroll1 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

300.twolf: -QxP -fast -O3 +FDO shlW32M.lib
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1
Product description located as of 9/2003:
http://developer.intel.com/design/motherbd/bz/index.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://www.intel.com/cd/channel/reseller/asmo-na/eng/products/box_desktop_boards/p4_boards/p4_dsk_board_d875pbz/index.htm
The system bus runs at 800 MHz
shlW32M.lib is the SmartHeap library V6.0 from http://www.microquill.com/smartheap/index.html
An AGP video card is installed