CINT2000 Result

Hewlett-Packard Company
AlphaServer ES47 7/1150

SPECint2000 = 882
SPECint_base2000 = 800

SPEC license #: 2	Tested by: HP	Test date: Jun-2004	Hardware Avail: Jul-2004	Software Avail: Jul-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	239	587	237	591
175.vpr	1400	169	828	166	846
176.gcc	1100	125	877	113	973
181.mcf	1800	249	722	154	1165
186.crafty	1000	102	984	102	984
197.parser	1800	348	517	275	654
252.eon	1300	135	960	137	950
253.perlbmk	1800	232	774	222	813
254.gap	1100	172	638	156	707
255.vortex	1900	175	1085	156	1221
256.bzip2	1500	178	842	171	876
300.twolf	3000	294	1020	290	1034

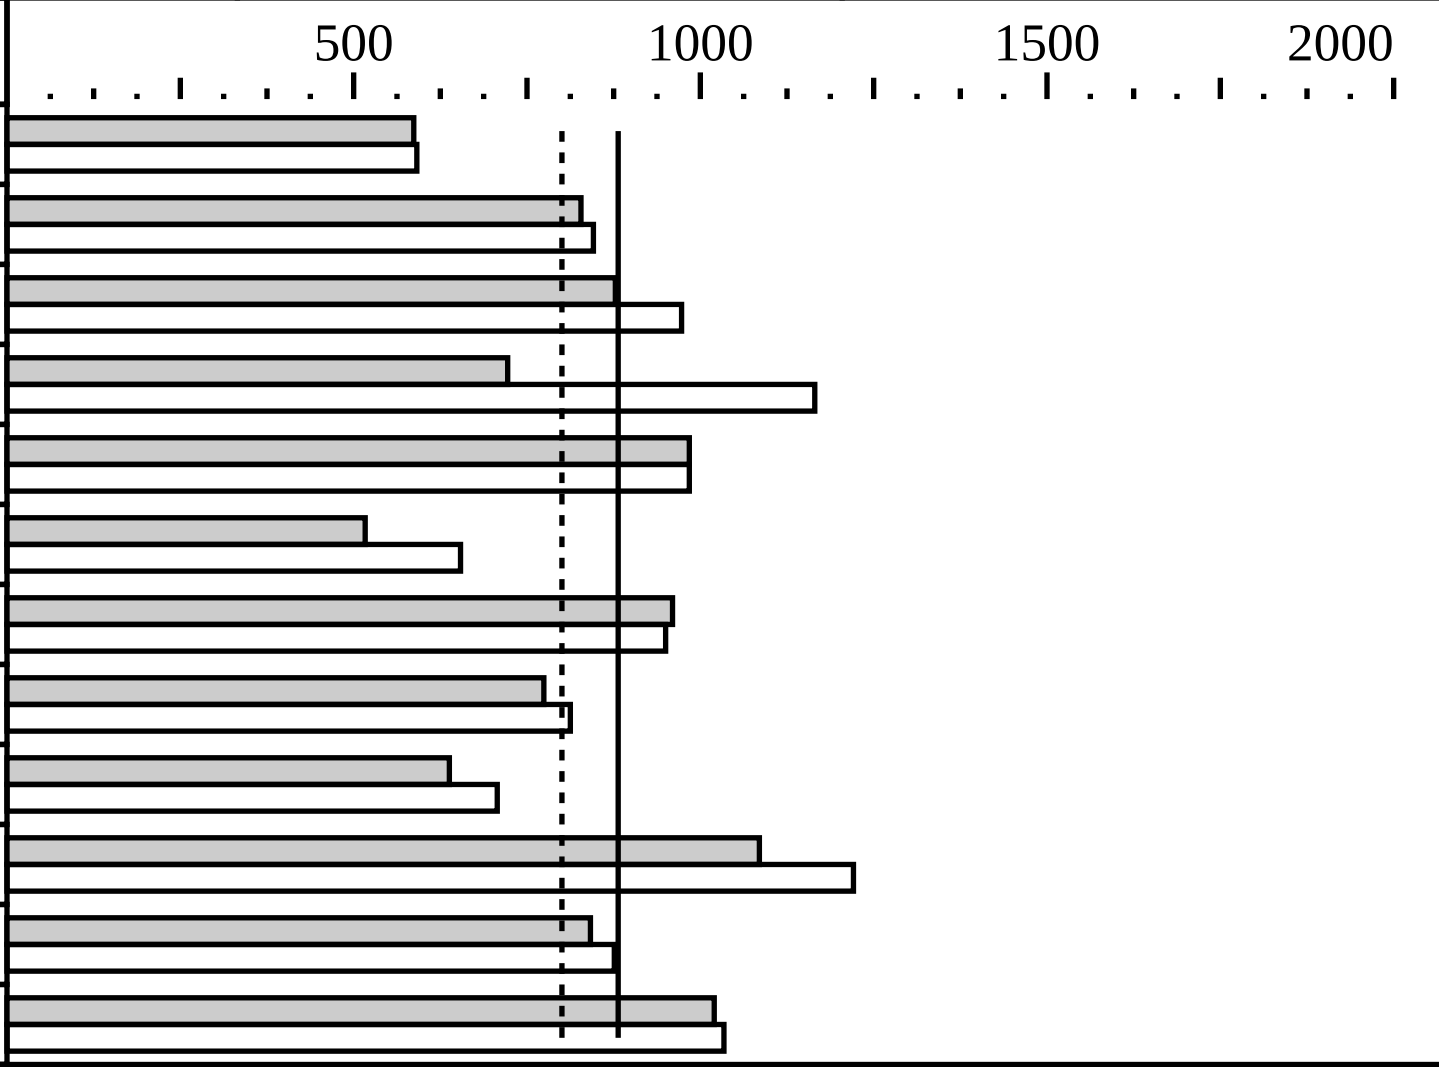

Hardware

CPU:	Alpha 21364
CPU MHz:	1150
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2 to 4
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	1.75MB on chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	4GB per CPU; 512MB RIMMs
Disk Subsystem:	AdvFS
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B + IPK
Compiler:	Compaq C V6.5-011-48C5K Program Analysis Tools V2.0 Spike V5.2 (510 USG) Compaq C++ V6.5-041
File System:	MFS, 8GB
System State:	Multi-user

Notes/Tuning Information

```
Baseline C  : cc  -arch ev7 -fast +CFB ONESTEP
         C++: cxx -arch ev7 -O2        ONESTEP

Peak:
  All but 252.eon: cc -g3 -arch ev7 ONESTEP
     164.gzip: -fast -O4 -non_shared +CFB
      175.vpr: -fast -O4 -assume restricted_pointers +CFB
      176.gcc: -fast -O4 -xtaso_short -all -ldensemalloc -none
               +CFB +IFB
      181.mcf: -fast -xtaso_short +CFB +IFB +PFB
   186.crafty: same as base
   197.parser: -fast -O4 -xtaso_short -non_shared +CFB
      252.eon: cxx -arch ev7 -O2 -all -ldensemalloc -none
  253.perlbmk: -fast -non_shared +CFB +IFB
      254.gap: -fast -O4 -non_shared +CFB +IFB +PFB
   255.vortex: -fast -non_shared +CFB +IFB
    256.bzip2: -fast -O4 -non_shared +CFB
    300.twolf: -fast -O4
               -ldensemalloc -non_shared +CFB +IFB
```

Notes/Tuning Information (Continued)

```
Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use_feedback  -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh = 6
        vm_swap_eager = 0
        ubc_maxpercent = 50

proc:
        max_per_proc_address_space = 34359738368
        max_per_proc_data_size = 34359738368
        max_per_proc_stack_size = 34359738368
        max_proc_per_user = 2048
        max_threads_per_user = 4096
        maxusers = 2048
```

CINT2000 Result

Hewlett-Packard Company
AlphaServer ES47 7/1150

SPECint2000 = 882
SPECint_base2000 = 800

SPEC license #: 2	Tested by: HP	Test date: Jun-2004	Hardware Avail: Jul-2004	Software Avail: Jul-2004

Notes/Tuning Information (Continued)

```
        per_proc_address_space = 34359738368
        per_proc_data_size = 34359738368
        per_proc_stack_size = 34359738368


Portability: gcc: -Dalloca=__builtin_alloca; crafty: -DALPHA
perlbmk: -DSPEC_CPU2000_DUNIX; vortex: -DSPEC_CPU2000_LP64
gap: -DSYS_HAS_CALLOC_PROTO -DSYS_IS_BSD -DSYS_HAS_IOCTL_PROTO
     -DSPEC_CPU2000_LP64

Information on UNIX V5.1B Patches can be found at
http://ftp1.service.digital.com/public/unix/v5.1b/

Processes were bound to CPUs using "runon".

This result was measured on model ES80.
Model ES47 and model ES80 are electronically equivalent.
```