CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
AlphaServer GS1280 7/1300

SPECint_rate2000 = 183

SPECint_rate_base2000 = 166

SPEC license #: 2 | Tested by: HP | Test date: Jun-2004 | Hardware Avail: Aug-2004 | Software Avail: Jul-2004

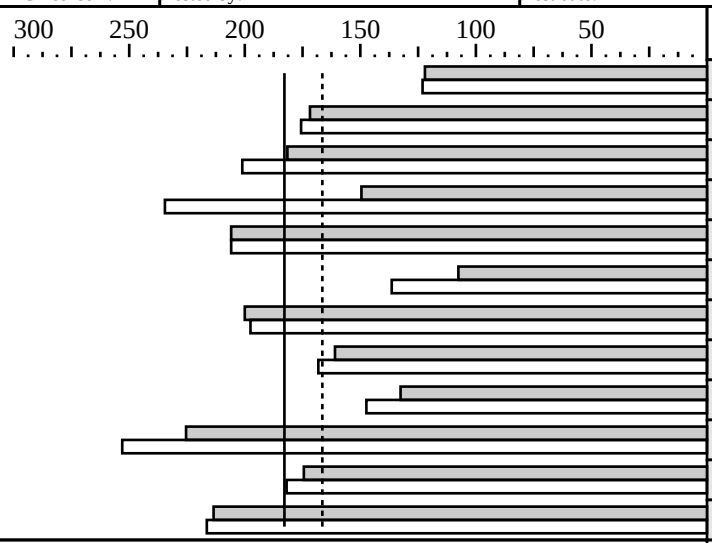

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	213	122	16	211	123
175.vpr	16	151	172	16	148	176
176.gcc	16	112	182	16	102	201
181.mcf	16	223	150	16	142	235
186.crafty	16	90.1	206	16	90.1	206
197.parser	16	311	108	16	245	136
252.eon	16	121	200	16	122	198
253.perlbmk	16	208	161	16	199	168
254.gap	16	154	133	16	139	147
255.vortex	16	156	225	16	139	253
256.bzip2	16	160	174	16	153	182
300.twolf	16	261	213	16	257	216

Hardware

CPU:	Alpha 21364
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	2 to 64
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	1.75MB on chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	2GB per CPU; 256MB RIMMs
Disk Subsystem:	AdvFS
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B-1 + PK4
Compiler:	Compaq C V6.5-011-48C5K Program Analysis Tools V2.0 Spike V5.2 (510 USG) Compaq C++ V6.5-041
File System:	MFS, 16GB
System State:	Multi-user

Notes/Tuning Information

```
Baseline C  : cc  -arch ev7 -fast +CFB ONESTEP
         C++: cxx -arch ev7 -O2        ONESTEP

Peak:
  All but 252.eon: cc -g3 -arch ev7 ONESTEP
     164.gzip: -fast -O4 -non_shared +CFB
      175.vpr: -fast -O4 -assume restricted_pointers +CFB
      176.gcc: -fast -O4 -xtaso_short -all -ldensemalloc -none
               +CFB +IFB
      181.mcf: -fast -xtaso_short +CFB +IFB +PFB
   186.crafty: same as base
   197.parser: -fast -O4 -xtaso_short -non_shared +CFB
      252.eon: cxx -arch ev7 -O2 -all -ldensemalloc -none
  253.perlbmk: -fast -non_shared +CFB +IFB
      254.gap: -fast -O4 -non_shared +CFB +IFB +PFB
   255.vortex: -fast -non_shared +CFB +IFB
    256.bzip2: -fast -O4 -non_shared +CFB
    300.twolf: -fast -O4
               -ldensemalloc -non_shared +CFB +IFB
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use_feedback -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh = 6
        vm_swap_eager = 0
        ubc_maxpercent = 50

proc:
        max_per_proc_address_space = 34359738368
        max_per_proc_data_size = 34359738368
        max_per_proc_stack_size = 34359738368
        max_proc_per_user = 2048
        max_threads_per_user = 4096
        maxusers = 2048
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
        per_proc_address_space = 34359738368
        per_proc_data_size = 34359738368
        per_proc_stack_size = 34359738368


Portability: gcc: -Dalloca=__builtin_alloca; crafty: -DALPHA
perlbmk: -DSPEC_CPU2000_DUNIX; vortex: -DSPEC_CPU2000_LP64
gap: -DSYS_HAS_CALLOC_PROTO -DSYS_IS_BSD -DSYS_HAS_IOCTL_PROTO
     -DSPEC_CPU2000_LP64

Information on UNIX V5.1B Patches can be found at
http://ftp1.service.digital.com/public/unix/v5.1b/

Processes were bound to CPUs using "runon".
```