CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
AlphaServer GS1280 7/1300

SPECfp_rate2000 = 619

SPECfp_rate_base2000 = 470

SPEC license #: 2 | Tested by: HP | Test date: Jun-2004 | Hardware Avail: Aug-2004 | Software Avail: Jul-2004

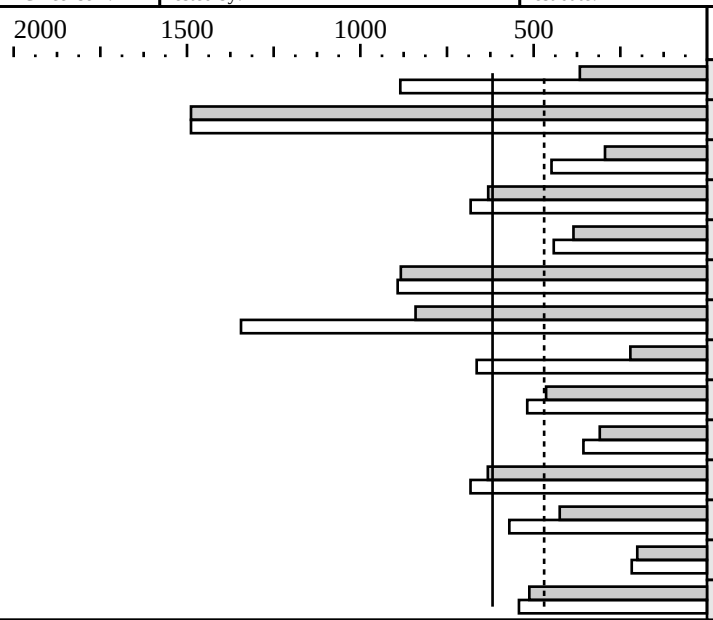

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	162	367	32	67.1	885
171.swim	32	77.3	1488	32	77.3	1488
172.mgrid	32	227	294	32	149	449
173.applu	32	124	631	32	114	682
177.mesa	32	135	385	32	118	442
178.galgel	32	122	883	32	121	892
179.art	32	115	841	32	71.8	1344
183.equake	32	218	221	32	72.6	664
187.facerec	32	152	464	32	136	519
188.ammp	32	264	309	32	229	356
189.lucas	32	117	632	32	109	682
191.fma3d	32	183	425	32	137	570
200.sixtrack	32	203	201	32	188	217
301.apsi	32	188	513	32	178	542

Hardware

CPU:	Alpha 21364
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	2 to 64
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	1.75MB on chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	2GB per CPU; 256MB RIMMs
Disk Subsystem:	AdvFS
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B-1 + PK4
Compiler:	Compaq C V6.5-011-48C5K Program Analysis Tools V2.0 Spike V5.2 (510 USG) HP Fortran V5.5A-3548-48D88 HP Fortran 77 V5.5A-3548-48D88 KAP Fortran V4.3 000607 KAP Fortran 77 V4.1 980926 KAP C V4.1 000607
File System:	MFS, 16GB
System State:	Multi-user

Notes/Tuning Information

```
Baseline   C: cc  -arch ev7 -fast -O4 ONESTEP
     Fortran: f90 -arch ev7 -fast -O5 ONESTEP


Peak:
  All use -g3 -arch ev7 -non_shared ONESTEP
  except these (which use only the tunings shown below):
     173.applu 188.ammp 191.fma3d
  Individual benchmark tuning:
  168.wupwise: kf77 -call_shared -inline all -tune ev67
               -unroll 12 -automatic -align commons -arch ev67
               -fkapargs=' -aggressive=c -fuse
               -fuselevel=1 -so=2 -r=1 -o=1 -interleave
               -ur=6 -ur2=060 ' +PFB
      171.swim: same as base
     172.mgrid: kf90 -call_shared -arch generic -O5 -inline
                manual -nopipeline -transform_loops -unroll 9 -automatic
```

Notes/Tuning Information (Continued)

```
                  -fkapargs='-aggressive=a -fuse -interleave
                  -ur=2 -ur3=5 -cachesize=128,16000 ' +PFB
     173.applu: kf90  -O5 -transform_loops
                -fkapargs=' -o=0 -nointerleave -ur=14
                -ur2=260 -ur3=18' +PFB
      177.mesa: kcc -fast -O4 +CFB +IFB
    178.galgel: f90 -O5 -fast -unroll 5 -automatic
       179.art: kcc  -assume whole_program -ldensemalloc
                -call_shared -assume restricted_pointers
                -unroll 16 -inline none -ckapargs='
                -fuse -fuselevel=1 -ur=3' +PFB
    183.equake: cc -call_shared -arch generic -fast -O4
                -ldensemalloc -assume restricted_pointers
                -inline speed -unroll 13 -xtaso_short +PFB
   187.facerec: f90 -O4 -nopipeline -inline all
                -non_shared -speculate all -unroll 7
                -automatic -assume accuracy_sensitive
                -math_library fast +IFB
      188.ammp: cc -arch host -O4 -ifo -assume nomath_errno
                -assume trusted_short_alignment -fp_reorder
                -readonly_strings -ldensemalloc -xtaso_short
                -assume restricted_pointers -unroll 9
                -inline speed +CFB +IFB +PFB
     189.lucas: kf90 -O5 -fkapargs='-ur=1' +PFB
     191.fma3d: kf90 -O4 -transform_loops -fkapargs='-cachesize=128,16000 ' +PFB
  200.sixtrack: f90 -fast -O5 -assume accuracy_sensitive
                -notransform_loops +PFB
     301.apsi: kf90 -O5 -inline none -call_shared -speculate all
                -align commons -fkapargs=' -aggressive=ab
                -tune=ev5 -fuse -ur=1 -ur2=60 -ur3=20
                -cachesize=128,16000'

Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use_feedback -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh = 6
        vm_swap_eager = 0
        ubc_maxpercent = 50

proc:
        max_per_proc_address_space = 34359738368
        max_per_proc_data_size = 34359738368
        max_per_proc_stack_size = 34359738368
        max_proc_per_user = 2048
        max_threads_per_user = 4096
        maxusers = 2048
        per_proc_address_space = 34359738368
        per_proc_data_size = 34359738368
        per_proc_stack_size = 34359738368


Portability: galgel: -fixed

Information on UNIX V5.1B Patches can be found at
http://ftp1.service.digital.com/public/unix/v5.1b/

Processes were bound to CPUs using "runon".
```