CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Java Workstation W2100z

SPECint_rate2000 = 36.0

SPECint_rate_base2000 = 32.5

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Jun-2004 | Hardware Avail: Jul-2004 | Software Avail: May-2004

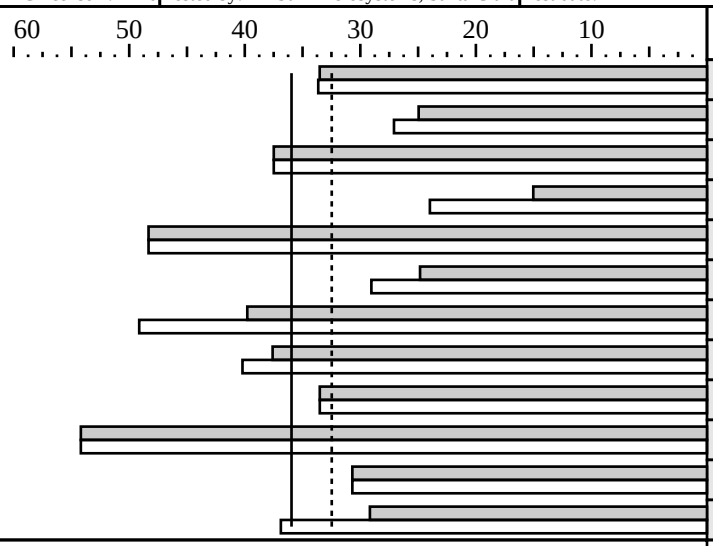

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	96.9	33.5	2	96.5	33.6
175.vpr	2	130	25.0	2	120	27.1
176.gcc	2	68.1	37.5	2	68.1	37.5
181.mcf	2	278	15.0	2	174	24.0
186.crafty	2	48.0	48.3	2	48.0	48.3
197.parser	2	168	24.8	2	144	29.0
252.eon	2	75.8	39.8	2	61.4	49.1
253.perlbmk	2	111	37.6	2	104	40.2
254.gap	2	76.2	33.5	2	76.2	33.5
255.vortex	2	81.3	54.2	2	81.3	54.2
256.bzip2	2	113	30.7	2	113	30.7
300.twolf	2	239	29.2	2	189	36.9

Hardware

CPU:	AMD Opteron (TM) 250
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB, PC3200 CL3 DDR SDRAM ECC Registered
Disk Subsystem:	SCSI, 73GB, 10K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux WS 3 (AMD64)
Compiler:	PathScale EKO Compiler Suite, Release 1.1 Red Hat gcc 3.5 ssa (from RHEL WS 3.0)
File System:	Linux/ext3
System State:	Multi-user, Run level 3

Notes/Tuning Information

```
Feedback-directed optimization is indicated by "+FDO", which means,
unless otherwise noted:
     PASS1: -fb_create fbdata
     PASS2: -fb_opt    fbdata

Compiler: pathcc (PathScale C) unless otherwise noted.
If other compilers are used, they are indicated as:
   g++     Gnu C++
   pathCC  PathScale C++

Integer base tuning:
  C programs:       pathcc -O3 -ipa +FDO
  C++ programs:     pathCC -Ofast +FDO

Peak Tuning:
164.gzip:     -O3 -ipa -WOPT:val=0 -CG:p2align_freq=10000 +FDO
175.vpr:      -O2 -ipa -OPT:alias=disjoint -LNO:prefetch_ahead=2
              -CG:p2align_freq=500000 -INLINE:aggressive=on
              -IPA:space=300:plimit=10000:callee_limit=5000:linear=on
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                +FDO
    176.gcc:    basepeak = true
    181.mcf:    -O3 -static -OPT:Ofast -m32 +FDO
    186.crafty: basepeak = true
    197.parser: -O3 -ipa -m32 -IPA:ctype=on +FDO
    252.eon:    g++ -O3 -msse2 -funroll-all-loops -ffast-math
                -finline-limit=5000
                Uses g++ style Feedback Directed Optimization:
                   PASS1: -fprofile-arcs   PASS2: -fbranch-probabilities
                Previous feedback is removed prior to compiles, using:
                   fdo_pre0 = rm -f *.da *.life analyz_prbrob.out
    253.perlbmk: -O3 -ipa -TENV:X=3 -IPA:min_hotness=5:plimit=20000 +FDO
    254.gap:    basepeak=yes
    255.vortex: basepeak=yes
    256.bzip2:  basepeak=yes
    300.twolf:  -O2 -OPT:unroll_times=8:unroll_size=256:alias=disjoint:Ofast
                -CG:gcm=off:p2align_freq=100000 -TENV:X=4 +FDO -m32

    Portability:
    186.crafty: -DLINUX_i386
    252.eon:    -DHAS_ERRLIST  -DSPEC_CPU2000_LP64 -lm
                srcalt = fmax_errno
    253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
    254.gap:    -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
                -DSPEC_CPU2000_LP64
    255.vortex: -DSPEC_CPU2000_LP64

    Notes:
         BIOS build A5S1, default setting was used.
```