CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V40z

SPECfp_rate2000 = 19.6

SPECfp_rate_base2000 = 18.0

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Jul-2004 | Hardware Avail: Jul-2004 | Software Avail: Jul-2004

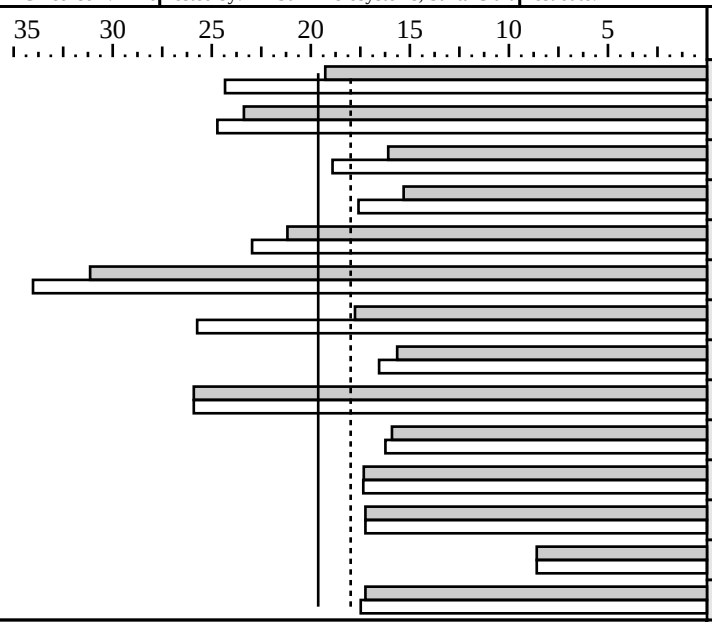

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	96.3	19.3	1	76.3	24.3
171.swim	1	154	23.4	1	145	24.7
172.mgrid	1	130	16.1	1	110	18.9
173.applu	1	159	15.3	1	138	17.6
177.mesa	1	76.7	21.2	1	70.7	23.0
178.galgel	1	108	31.1	1	98.9	34.0
179.art	1	170	17.8	1	117	25.7
183.equake	1	96.4	15.6	1	91.1	16.6
187.facerec	1	85.1	25.9	1	85.1	25.9
188.ammp	1	160	15.9	1	157	16.2
189.lucas	1	134	17.3	1	134	17.4
191.fma3d	1	141	17.2	1	141	17.2
200.sixtrack	1	148	8.59	1	148	8.59
301.apsi	1	175	17.2	1	173	17.5

Hardware

CPU:	AMD Opteron (TM) 850
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x1GB, PC2700 CL2.5 DDR SDRAM ECC Registered
Disk Subsystem:	SCSI, 73GB, 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 8.0 SLES 64 bit (SP3)
Compiler:	PathScale EKO Compiler Suite, Release 1.1 SuSE optional gcc 3.3 (from SLES8 SP3) PGI Fortran 5.2 (build 5.2-0E) AMD Core Math Library (Version 2.0) for AMD64
File System:	Linux/ext3
System State:	Multi-user, Run level 3

Notes/Tuning Information

```
A two-pass compilation method is used where indicated:
  +PSFDO indicates PathScale feedback
           PASS1: -fb_create fbdata
           PASS2: -fb_opt    fbdata
  +ACML is the AMD Core Math Library V2.0

Compilers:
   C:       pathcc  (PathScale C) unless otherwise noted
   Fortran: pathf90 (PathScale f90) unless otherwise noted
If other compilers are used, they are indicated as:
   gcc:   Gnu C
   pgf90: PGI Fortran

Floating Point base tuning:
 Fortran: pgf90 -fastsse  -Mipa=fast -Msmart
 C:       pathcc -Ofast -WOPT:mem_opnds=on +PSFDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Floating Point peak tuning:
168.wupwise:  pgf90 -fastsse -Mipa=fast,inline -Msmart
171.swim:     -Ofast -OPT:ro=3 -LNO:fusion=2:prefetch=2
172.mgrid:    -O3 -OPT:Ofast
              -LNO:fusion=2:blocking=off:ou_max=5:sclrze=off:prefetch=2
              -OPT:unroll_times=8:unroll_size=256:ro=3
              -CG:gcm=off:cflow=off
173.applu:    -O3 -ipa
              -LNO:fusion=2:interchange=OFF:blocking=OFF:ou_prod_max=10
              :ou_max=5:prefetch=2 -OPT:IEEE_arith=1:ro=3:unroll_size=0
             -TENV:X=4 -WOPT:mem_opnds=on:retype_expr=on:val=0 -CG:local_fwd_sched=on
177.mesa:     -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on +PSFDO
178.galgel:   pgf90 -fastsse -Mipa=fast -mp +ACML
              RM_SOURCES=lapak.f90 ONESTEP
179.art:      -O3 -OPT:Ofast -fno-math-errno -m32 +PSFDO
183.equake:   gcc -DSPEC_CPU2000_LP64 -O3 -funroll-all-loops -ffast-math
              -finline-limit=2000 ONESTEP
187.facerec:  basepeak=true
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times=8:Ofast:ro=3
              -fno-math-errno -TENV:X=4 +PSFDO
189.lucas:  pgf90 -fastsse -Mipa=fast,inline -Msmart
191.fma3d:  basepeak=true
200.sixtrack: basepeak=true
301.apsi:     -Ofast -TENV:X=4 -LNO:fusion=2:prefetch=0:blocking=off
              -IPA:linear=on:plimit=525

Portability:
178.galgel:     -Mfixed


Notes:
     BIOS build 2.1.0.9E, default setting was used.
     Only one CPU was present in the system, other CPUs were physically removed.
```