CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V20z

SPECfp2000 = 1693

SPECfp_base2000 = 1555

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Jul-2004 | Hardware Avail: Jul-2004 | Software Avail: Jul-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	96.3	1662	76.1	2104
171.swim	3100	154	2007	146	2117
172.mgrid	1800	129	1390	110	1631
173.applu	2100	159	1323	139	1516
177.mesa	1400	76.6	1829	70.7	1980
178.galgel	2900	108	2673	99.0	2930
179.art	2600	166	1566	117	2222
183.equake	1300	96.3	1350	91.0	1429
187.facerec	1900	85.0	2235	85.0	2235
188.ammp	2200	160	1373	157	1398
189.lucas	2000	132	1512	132	1512
191.fma3d	2100	141	1488	141	1488
200.sixtrack	1100	148	741	148	741
301.apsi	2600	175	1484	173	1505

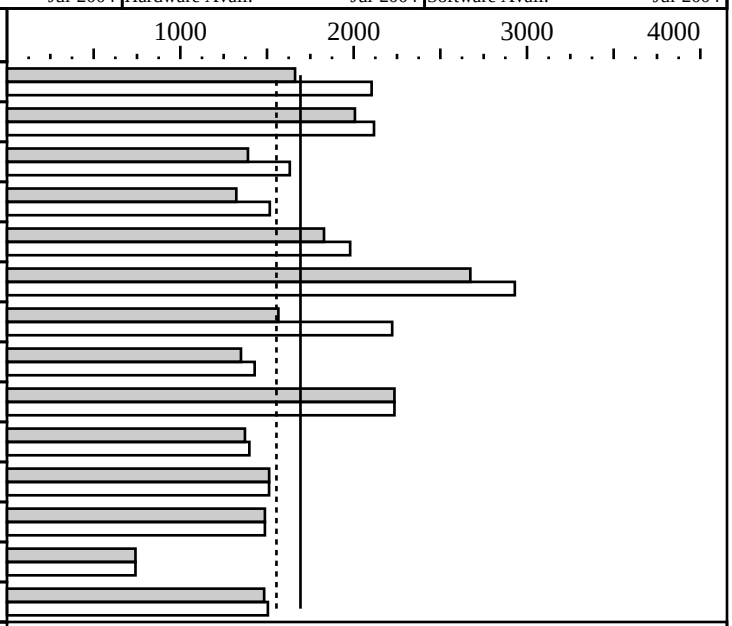

Hardware

CPU:	AMD Opteron (TM) 250
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x1GB, PC2700 CL2.5 DDR SDRAM ECC Registered
Disk Subsystem:	SCSI, 73GB, 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 8.0 SLES 64 bit (SP3)
Compiler:	PathScale EKO Compiler Suite, Release 1.1 SuSE optional gcc 3.3 (from SLES8 SP3) PGI Fortran 5.2 (build 5.2-0E) AMD Core Math Library (Version 2.0) for AMD64
File System:	Linux/ext3
System State:	Multi-user, Run level 3

Notes/Tuning Information

```
A two-pass compilation method is used where indicated:
  +PSFDO indicates PathScale feedback
           PASS1: -fb_create fbdata
           PASS2: -fb_opt    fbdata
  +ACML is the AMD Core Math Library V2.0

Compilers:
   C:       pathcc  (PathScale C) unless otherwise noted
   Fortran: pathf90 (PathScale f90) unless otherwise noted
If other compilers are used, they are indicated as:
   gcc:   Gnu C
   pgf90: PGI Fortran

Floating Point base tuning:
 Fortran: pgf90 -fastsse  -Mipa=fast -Msmart
 C:       pathcc -Ofast -WOPT:mem_opnds=on +PSFDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Floating Point peak tuning:
168.wupwise:  pgf90 -fastsse -Mipa=fast,inline -Msmart
171.swim:     -Ofast -OPT:ro=3 -LNO:fusion=2:prefetch=2
172.mgrid:    -O3 -OPT:Ofast
              -LNO:fusion=2:blocking=off:ou_max=5:sclrze=off:prefetch=2
              -OPT:unroll_times=8:unroll_size=256:ro=3
              -CG:gcm=off:cflow=off
173.applu:    -O3 -ipa
              -LNO:fusion=2:interchange=OFF:blocking=OFF:ou_prod_max=10
              :ou_max=5:prefetch=2 -OPT:IEEE_arith=1:ro=3:unroll_size=0
             -TENV:X=4 -WOPT:mem_opnds=on:retype_expr=on:val=0 -CG:local_fwd_sched=on
177.mesa:     -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on +PSFDO
178.galgel:   pgf90 -fastsse -Mipa=fast -mp +ACML
              RM_SOURCES=lapak.f90 ONESTEP
179.art:      -O3 -OPT:Ofast -fno-math-errno -m32 +PSFDO
183.equake:   gcc -DSPEC_CPU2000_LP64 -O3 -funroll-all-loops -ffast-math
              -finline-limit=2000 ONESTEP
187.facerec:  basepeak=true
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times=8:Ofast:ro=3
              -fno-math-errno -TENV:X=4 +PSFDO
189.lucas:  pgf90 -fastsse -Mipa=fast,inline -Msmart
191.fma3d:  basepeak=true
200.sixtrack: basepeak=true
301.apsi:     -Ofast -TENV:X=4 -LNO:fusion=2:prefetch=0:blocking=off
              -IPA:linear=on:plimit=525

Portability:
178.galgel:     -Mfixed


Notes:
     BIOS build 2.1.0.9E, default setting was used.
     Second CPU was physically removed from the system.
```