CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
AlphaServer GS1280 7/1300

SPECint_rate2000 = 728

SPECint_rate_base2000 = 661

SPEC license #: 2 | Tested by: HP | Test date: Jun-2004 | Hardware Avail: Aug-2004 | Software Avail: Jul-2004

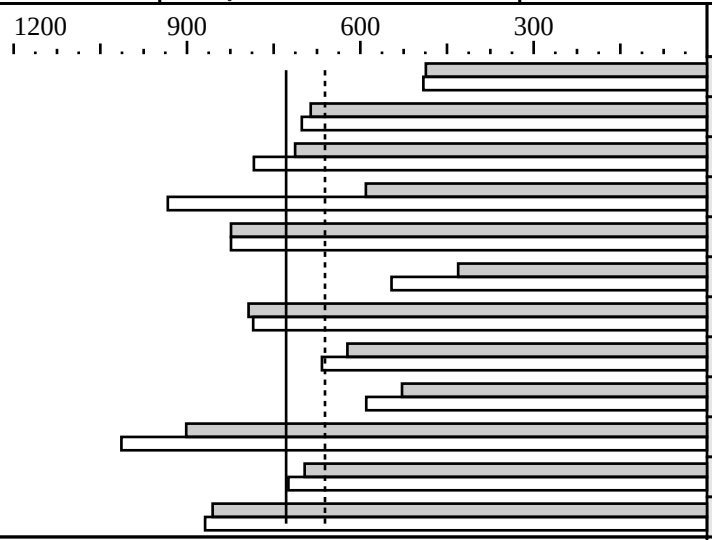

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	64	214	487	64	212	491
175.vpr	64	152	686	64	148	701
176.gcc	64	115	713	64	104	784
181.mcf	64	226	590	64	143	933
186.crafty	64	90.1	824	64	90.1	824
197.parser	64	310	431	64	245	546
252.eon	64	122	793	64	123	785
253.perlbmk	64	215	622	64	201	666
254.gap	64	155	528	64	138	590
255.vortex	64	156	901	64	139	1014
256.bzip2	64	160	696	64	154	724
300.twolf	64	260	856	64	256	869

Hardware

CPU:	Alpha 21364
CPU MHz:	1300
FPU:	Integrated
CPU(s) enabled:	64 cores, 64 chips, 1 core/chip
CPU(s) orderable:	2 to 64
Parallel:	No
Primary Cache:	64KB(I)+64KB(D) on chip
Secondary Cache:	1.75MB on chip per CPU
L3 Cache:	None
Other Cache:	None
Memory:	2GB per CPU; 256MB RIMMs
Disk Subsystem:	18GB Ultra 320 15KRPM
Other Hardware:	None

Software

Operating System:	Tru64 UNIX V5.1B-1 + PK4
Compiler:	Compaq C V6.5-011-48C5K Program Analysis Tools V2.0 Spike V5.2 (510 USG) Compaq C++ V6.5-041
File System:	AdvFS, 14x18GB, RAID0
System State:	Multi-user

Notes/Tuning Information

```
Baseline C  : cc  -arch ev7 -fast +CFB ONESTEP
         C++: cxx -arch ev7 -O2        ONESTEP

Peak:
  All but 252.eon: cc -g3 -arch ev7 ONESTEP
     164.gzip: -fast -O4 -non_shared +CFB
      175.vpr: -fast -O4 -assume restricted_pointers +CFB
      176.gcc: -fast -O4 -xtaso_short -all -ldensemalloc -none
               +CFB +IFB
      181.mcf: -fast -xtaso_short +CFB +IFB +PFB
   186.crafty: same as base
   197.parser: -fast -O4 -xtaso_short -non_shared +CFB
      252.eon: cxx -arch ev7 -O2 -all -ldensemalloc -none
  253.perlbmk: -fast -non_shared +CFB +IFB
      254.gap: -fast -O4 -non_shared +CFB +IFB +PFB
   255.vortex: -fast -non_shared +CFB +IFB
    256.bzip2: -fast -O4 -non_shared +CFB
    300.twolf: -fast -O4
               -ldensemalloc -non_shared +CFB +IFB
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Most benchmarks are built using one or more types of
profile-driven feedback.  The types used are designated
by abbreviations in the notes:

+CFB: Code generation is optimized by the compiler, using
      feedback from a training run.  These commands are
      done before the first compile (in phase "fdo_pre0"):

           mkdir /tmp/pp
           rm -f /tmp/pp/${baseexe}*

      and these flags are added to the first and second compiles:

           PASS1_CFLAGS = -prof_gen_noopt    -prof_dir /tmp/pp
           PASS2_CFLAGS = -prof_use_feedback -prof_dir /tmp/pp

     (Peak builds use /tmp/pp above; base builds use /tmp/pb.)

+IFB: Icache usage is improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These commands
      are used (in phase "fdo_postN"):

           mv ${baseexe} oldexe
           spike oldexe -feedback oldexe -o ${baseexe}

+PFB: Prefetches are improved by the post-link-time optimizer
      Spike, using feedback from a training run.  These
      commands are used (in phase "fdo_post_makeN"):

           rm -f *Counts*
           mv ${baseexe} oldexe
           pixie -stats dstride oldexe 1>pixie.out 2>pixie.err
           mv oldexe.pixie ${baseexe}

      A training run is carried out (in phase "fdo_runN"), and
      then this command (in phase "fdo_postN"):

           spike oldexe -fb oldexe -stride_prefetch -o ${baseexe}

When Spike is used for both Icache and Prefetch improvements,
only one spike command is actually issued, with the Icache
options followed by the Prefetch options.

vm:
        vm_bigpg_enabled = 1
        vm_bigpg_thresh = 6
        vm_swap_eager = 0
        ubc_maxpercent = 50

proc:
        max_per_proc_address_space = 34359738368
        max_per_proc_data_size = 34359738368
        max_per_proc_stack_size = 34359738368
        max_proc_per_user = 2048
        max_threads_per_user = 4096
        maxusers = 2048
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
        per_proc_address_space = 34359738368
        per_proc_data_size = 34359738368
        per_proc_stack_size = 34359738368


Portability: gcc: -Dalloca=__builtin_alloca; crafty: -DALPHA
perlbmk: -DSPEC_CPU2000_DUNIX; vortex: -DSPEC_CPU2000_LP64
gap: -DSYS_HAS_CALLOC_PROTO -DSYS_IS_BSD -DSYS_HAS_IOCTL_PROTO
     -DSPEC_CPU2000_LP64

Information on UNIX V5.1B Patches can be found at
http://ftp1.service.digital.com/public/unix/v5.1b/

Processes were bound to CPUs using "runon".
```