CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V890 (4 processor)

SPECfp_rate2000 = 81.3

SPECfp_rate_base2000 = 71.1

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Aug-2004 | Hardware Avail: Sep-2004 | Software Avail: Sep-2004

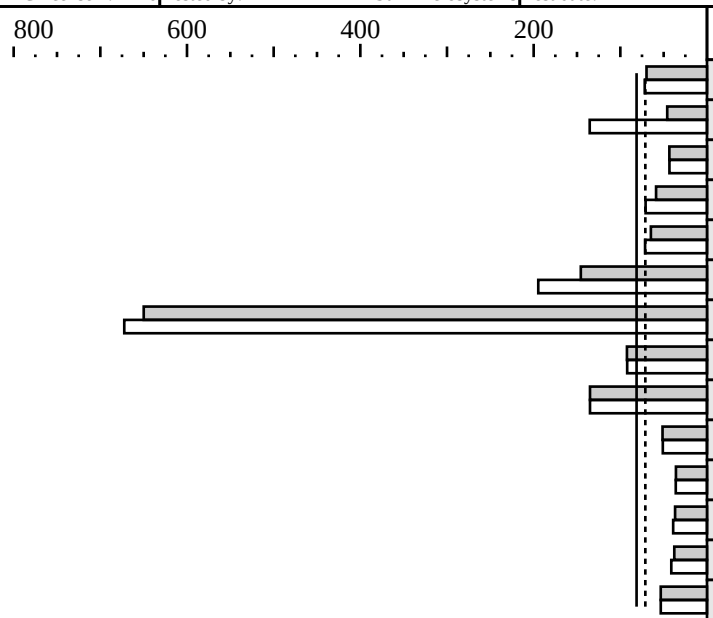

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	8	213	69.8	8	207	71.8
171.swim	8	627	45.9	8	213	135
172.mgrid	8	385	43.4	8	385	43.3
173.applu	8	332	58.8	8	275	70.8
177.mesa	8	201	64.8	8	182	71.4
178.galgel	8	185	146	8	138	195
179.art	8	37.1	650	8	35.9	672
183.equake	8	131	92.4	8	131	92.1
187.facerec	8	131	135	8	131	135
188.ammp	8	398	51.3	8	400	51.0
189.lucas	8	518	35.8	8	515	36.0
191.fma3d	8	529	36.8	8	499	39.0
200.sixtrack	8	270	37.7	8	248	41.2
301.apsi	8	452	53.4	8	452	53.3

Hardware

CPU:	UltraSPARC IV
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chips
CPU(s) orderable:	4,8 (order by # of chips)
Parallel:	No
Primary Cache:	32KBI+64KBD per core on chip (64KBI+128KBD on chip)
Secondary Cache:	8MB(I+D) per core off chip (16MB(I+D) off chip)
L3 Cache:	None
Other Cache:	None
Memory:	16GB 8-way interleaved
Disk Subsystem:	1 x 73GB
Other Hardware:	None

Software

Operating System:	Solaris 9 9/04
Compiler:	Sun Studio 9
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
 ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

 168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
 171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
              -Qoption iropt -Atile:skewp,-Ainline:cs=700
              (no feedback)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 172.mgrid:   -fast -xipo=2
 173.applu:   -fast -xipo=2
              -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
              -Qoption iropt -Aujam:inner=g
 177.mesa:    -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qms_pipe+unoovf
 178.galgel:  -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
              RM_SOURCES=lapak.f90
 179.art:     -fast -xipo=2 -xalias_level=std
              -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
 183.equake:  -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
 187.facerec: basepeak=yes
 188.ammp:    -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm

 189.lucas:   -fast -xipo=2 -xprefetch_level=3
              -Qoption iropt -Apf:pdl=1 -Qoption f90comp
              -array_pad_rows,1977
 191.fma3d:   -fast -xipo=2 -stackvar -xprefetch_level=3
              -Qoption iropt -Apf:pdl=1
 200.sixtrack:-xO4 -dalign -xchip=ultra3 -xarch=v8plusb
              -fsimple=2 -xprefetch=no
 301.apsi:    -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=512K
  MPSSSTACK=512K
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
 autoup=900
 tune_t_fsflushr=1
```