CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K8QS Pro (S4882), AMD Opteron (TM) 850

SPECfp2000 = 1531

SPECfp_base2000 = 1492

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Sep-2004 | Hardware Avail: Jul-2004 | Software Avail: Aug-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	75.5	2121	75.5	2121
171.swim	3100	142	2182	142	2182
172.mgrid	1800	150	1201	150	1201
173.applu	2100	170	1237	170	1237
177.mesa	1400	81.6	1715	76.0	1841
178.galgel	2900	122	2378	115	2518
179.art	2600	144	1808	144	1808
183.equake	1300	90.3	1439	90.3	1439
187.facerec	1900	118	1613	118	1613
188.ammp	2200	192	1149	174	1264
189.lucas	2000	121	1658	118	1694
191.fma3d	2100	164	1278	147	1429
200.sixtrack	1100	159	693	159	693
301.apsi	2600	190	1366	190	1367

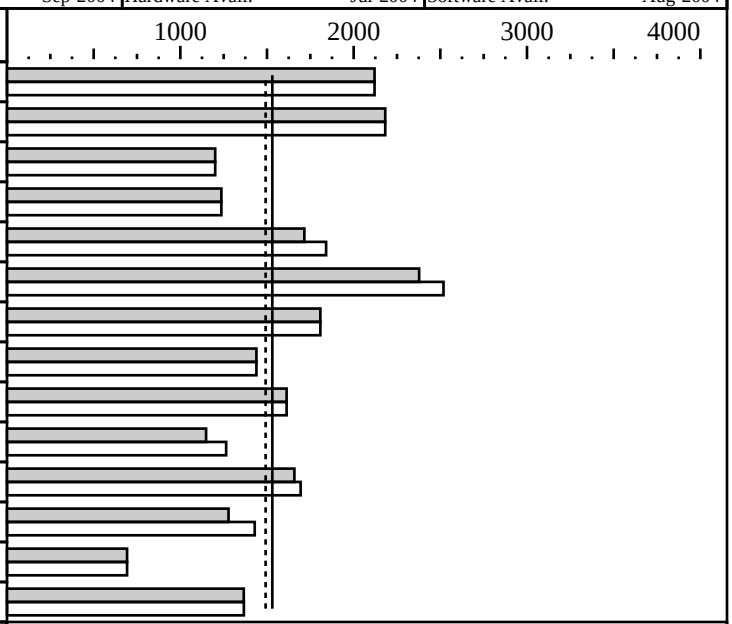

Hardware

CPU:	AMD Opteron (TM) 850
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512 MB PC3200 CL3.0 ECC Registered
Disk Subsystem:	SCSI, Seagate Cheetah ST336753LW Ultra 320, 15K rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows Server 2003, Enterprise Edition
Compiler:	Intel C++ 8.0 build 20040611Z, Intel Fortran 8.0 build 20040519Z, PGI Fortran compiler 5.2-1 for Windows XP, AMD Core Math library Version 2.0 (ACML), Microsoft Visual Studio .NET 7.0.9466 (libraries), MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Tested by Advanced Micro Devices
  +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
  +ACML is the AMD Core Math Library V2.0
  ONESTEP is set for all peak runs.
  ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
  pgf90 is the PGI Fortran compiler.
  Portability:
    178.galgel: -Mfixed
  Baseline: C      : icl   -fast -arch:SSE2 -QaxW +FDO
  Baseline: Fortran: pgf90 -fastsse -Mipa=fast,inline
  Peak tuning:
  168.wupwise:       pgf90 basepeak=yes
  171.swim:          ifort basepeak=yes
  172.mgrid:         pgf90 basepeak=yes
  173.applu:         pgf90 basepeak=yes
  177.mesa:          icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                    -Qoption,f,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 179.art:            icl   basepeak=yes
 183.equake:         icl   basepeak=yes
 178.galgel:        pgf90 -fastsse -Mipa=fast,safe -mp RM_SOURCES=lapak.f90 -Munix +ACML
 187.facerec:        pgf90 basepeak=yes
 188.ammp:           icl   -Oa   -arch:SSE2 -Zp4       -Qansi_alias
 189.lucas:          ifort                  -QxW       -Qunroll1
 191.fma3d:          ifort -fast            -QxW  +FDO -Qscalar_rep-
                    -Qoption,f,-ip_ninl_max_stats=1000,-ip_ninl_max_total_stats=3500
 200.sixtrack:       pgf90 basepeak=yes
 301.apsi:           pgf90 -fastsse -Mipa=fast,align
BIOS rev. 1.02
All memory slots populated on CPU0
The tested system can be assembled using an SSI MEB footprint case, such as the CCSI RC0352 3U
rackmount case, and a Tyan recommended 650W EPS-12V power supply, such as the Enermax
660W power supply (PEG851AX-VH)
Physical Address Extension (PAE) enabled
```