CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 (AMD Opteron (TM) 850)

SPECint_rate2000 = 35.8

SPECint_rate_base2000 = 32.4

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Sep-2004 | Hardware Avail: Sep-2004 | Software Avail: Sep-2004

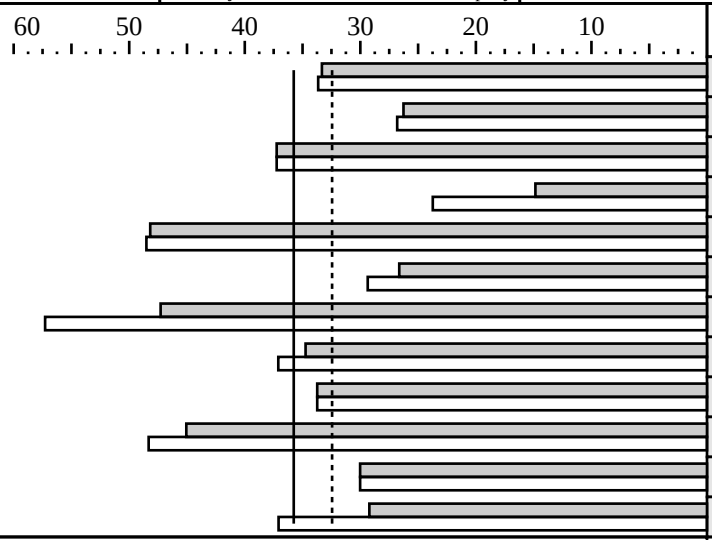

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	97.5	33.3	2	96.5	33.6
175.vpr	2	124	26.3	2	121	26.8
176.gcc	2	68.5	37.2	2	68.5	37.2
181.mcf	2	281	14.8	2	176	23.7
186.crafty	2	48.2	48.2	2	47.8	48.5
197.parser	2	157	26.6	2	142	29.4
252.eon	2	63.8	47.3	2	52.7	57.3
253.perlbmk	2	120	34.7	2	113	37.1
254.gap	2	75.7	33.7	2	75.7	33.7
255.vortex	2	97.8	45.1	2	91.2	48.3
256.bzip2	2	116	30.0	2	116	30.0
300.twolf	2	238	29.2	2	188	37.1

Hardware

CPU:	AMD Opteron (TM) 850
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	2,4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2048MB PC2700 CL2.5
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 8 for AMD64 (SP3) SuSE kernel 2.4.21-143-numa
Compiler:	PathScale EKO Compiler Suite, Release 1.3
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
Base tuning for C programs:   -O3 -ipa +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
  175.vpr:      -DSPEC_CPU2000
  181.mcf:      -DWANT_STDC_PROTO
  186.crafy:    -DLINUX_i386 -DSPEC_CPU2000
  252.eon:      -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt=fmax_errno
  253.perlbmk:  -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:      -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_SIGNAL_PROTO  -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
                -DSPEC_CPU2000_LP64
  255.vortex:   -DSPEC_CPU2000_LP64
  300.twolf:    -DSPEC_CPU2000 -DHAVE_SIGNED_CHAR
Peak tuning:
  164.gzip:     -Ofast +FDO
  175.vpr:      -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000 -INLINE:aggressive=on
                -IPA:space=300:plimit=10000:callee_limit=5000:linear=on +FDO
  176.gcc:      basepeak=yes
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    181.mcf:      -O3 -ipa -IPA:field_reorder=on -m32 +FDO
    186.crafty:   -Ofast +FDO
    197.parser:   -O3 -ipa -m32 -IPA:ctype=on +FDO
    252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
                -TENV:X=4:frame_pointer=off -fno-exceptions -LNO:fu=10:full_unroll_outer=1
                 +FDO -IPA:plimit=4000:pu_reorder=1
    253.perlbmk:  -O3 -ipa -TENV:X=3 +FDO -IPA:min_hotness=5:plimit=20000
    254.gap:     basepeak=yes
    255.vortex:   -Ofast -IPA:space=70:plimit=3000
                  -OPT:goto=off:unroll_analysis=off:unroll_size=0:unroll_times_max=8
                  -LNO:opt=0 -TENV:X=4 +FDO
    256.bzip2:    basepeak=yes
    300.twolf:    -O2 -OPT:unroll_times_max=8:unroll_size=256:alias=disjoint:Ofast
                  -CG:gcm=off:p2align_freq=100000 -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
  Taskset utility used to bind process to CPU(s)
```