CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI

SGI Altix 3700 Bx2 (1600MHz 6M L3, Itanium 2)

SPECint_rate2000 = --

SPECint_rate_base2000 = 129

SPEC license #: 4 | Tested by: SGI | Test date: Oct-2004 | Hardware Avail: Nov-2004 | Software Avail: Nov-2004

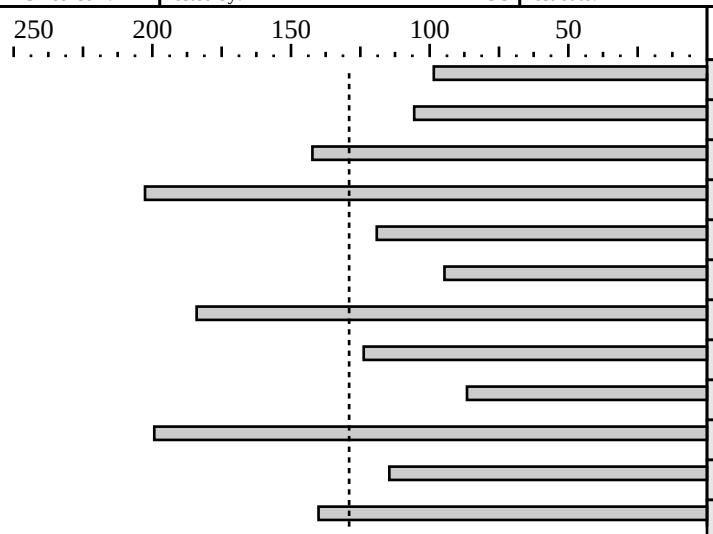

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	8	132	98.5			
175.vpr	8	123	106			
176.gcc	8	71.7	142			
181.mcf	8	82.4	203			
186.crafty	8	77.9	119			
197.parser	8	176	94.7			
252.eon	8	65.6	184			
253.perlbmk	8	135	124			
254.gap	8	118	86.5			
255.vortex	8	88.5	199			
256.bzip2	8	122	115			
300.twolf	8	199	140			

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	8 cores, 8 chips, 1 core/chip
CPU(s) orderable:	16-256
Parallel:	No
Primary Cache:	16KBI + 16KBD on chip, per core
Secondary Cache:	256KB (I+D) on chip, per core
L3 Cache:	6.0MB (I+D) on chip, per core
Other Cache:	N/A
Memory:	16 GB (32*512MB PC2700 DIMMS per 8 core module)
Disk Subsystem:	8 x 73 GB FibreChannel (Seagate Cheetah 10k rpm)
Other Hardware:	None

Software

Operating System:	SGI ProPack(TM) v3.0 Service Pack 2
Compiler:	Intel(R) C++ Compiler for Linux 8.1 (Build 20041021) MicroQuill SmartHeap Library 7.01 (www.microquill.com)
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
+FDO: PASS1=-prof_gen  PASS2=-prof_use

Baseline optimization flags:
  C programs:       -fast -auto_ilp32 +FDO
  C++ programs:     -fast -ansi_alias +FDO
  Extra Libraries:  libsmartheap64.a

Portability Flags:
  176.gcc: -DSPEC_CPU2000_LP64 -Dalloca=_builtin_alloca
  186.crafty: -DLINUX_i386
  252.eon: -DSPEC_CPU2000_LP64 -DHAS_ERRLIST -DFMAX_IS_DOUBLE
  253.perlbmk: -DSPEC_CPU2000_LP64 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_LINUX_IA64 -DSPEC_CPU2000_GLIBC22
  254.gap: -DSPEC_CPU2000_LP64 -DSYS_HAS_CALLOC_PROTO -DSYS_IS_USG
           -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
  255.vortex: -DSPEC_CPU2000_LP64 srcalt=closed_files

Extra CPUs were disabled at firmware.
Processes were bound to CPUs using dplace.
```