CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL35p (AMD Opteron (TM) 250)

SPECint2000 = 1618

SPECint_base2000 = 1443

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jan-2005 | Hardware Avail: Feb-2005 | Software Avail: Jan-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	98.8	1417	98.4	1422
175.vpr	1400	120	1164	117	1195
176.gcc	1100	69.0	1593	69.0	1593
181.mcf	1800	252	714	155	1163
186.crafty	1000	48.4	2066	48.3	2070
197.parser	1800	168	1074	138	1307
252.eon	1300	64.0	2031	53.2	2444
253.perlbmk	1800	111	1624	101	1776
254.gap	1100	74.9	1468	72.0	1527
255.vortex	1900	80.6	2357	74.6	2546
256.bzip2	1500	113	1326	113	1326
300.twolf	3000	232	1296	178	1690

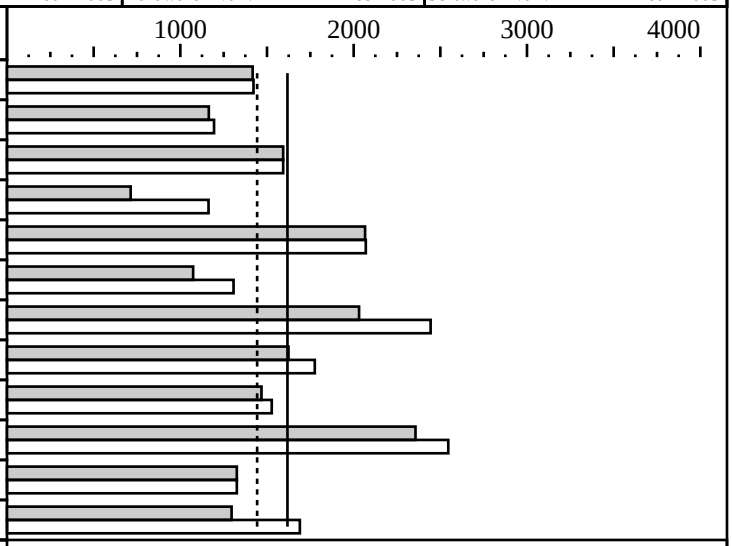

Hardware

CPU:	AMD Opteron (TM) 250
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x2048MB PC3200 DDR 400
Disk Subsystem:	1x60GB ATA100
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 for AMD64 SuSE kernel 2.6.5-7.97-smp
Compiler:	PathScale EKO Compiler Suite, Release 1.4
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
Base tuning for C programs:   -O3 -ipa +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt=fmax_errno
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_SIGNAL_PROTO  -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
               -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64 srcalt=closed_files
  300.twolf:   -DHAVE_SIGNED_CHAR
Peak tuning:
  164.gzip:    -Ofast +FDO
  175.vpr:    -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000 +FDO
    loader:    -INLINE:aggressive=on
               -IPA:space=300:plimit=10000:callee_limit=5000:linear=on
  176.gcc:    basepeak=true
  181.mcf:    -O3 -ipa -IPA:field_reorder=on -m32 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    186.crafty:  -Ofast +FDO
    197.parser:  -O3 -ipa -m32 +FDO
      loader:    -IPA:ctype=on
    252.eon:   -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
                -TENV:X=4:frame_pointer=off -fno-exceptions -LNO:fu=10:full_unroll_outer=on
                +FDO
      loader:    -IPA:plimit=4000:pu_reorder=1
    253.perlbmk: -O3 -ipa +FDO
      loader:    -IPA:plimit=10000
    254.gap:   -O3 -ipa -OPT:transform_to_memlib=on
    255.vortex:  -Ofast -IPA:space=70:plimit=3000
                 -OPT:goto=off:unroll_analysis=off:unroll_size=0:unroll_times_max=8
                 -LNO:opt=0 -TENV:X=4 +FDO
    256.bzip2:   basepeak=true
    300.twolf:   -O2 -OPT:unroll_times_max=8:unroll_size=256:alias=disjoint:Ofast
                 -CG:gcm=off:p2align_freq=100000 -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
```