CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire V890(8 processor)

SPECint_rate2000 = 131

SPECint_rate_base2000 = 120

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Dec-2004 | Hardware Avail: Feb-2005 | Software Avail: Jan-2005

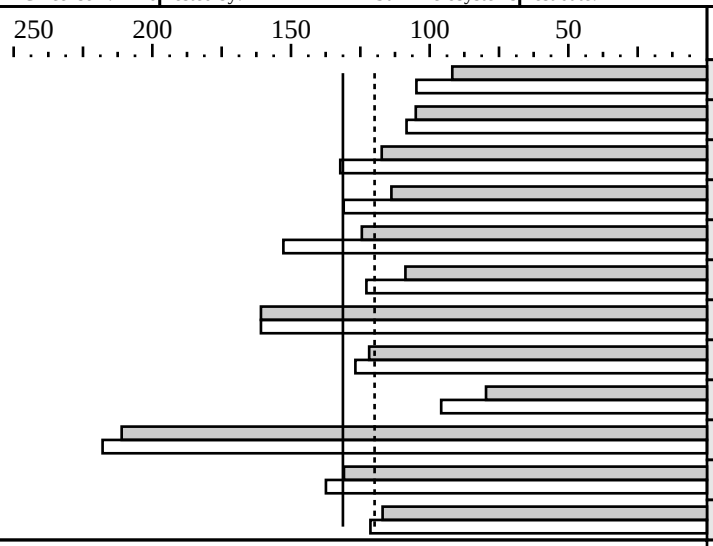

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	283	91.8	16	248	105
175.vpr	16	247	105	16	240	108
176.gcc	16	174	117	16	154	132
181.mcf	16	294	114	16	255	131
186.crafty	16	149	124	16	122	153
197.parser	16	307	109	16	272	123
252.eon	16	150	161	16	150	161
253.perlbmk	16	274	122	16	264	127
254.gap	16	256	79.7	16	213	95.8
255.vortex	16	167	211	16	162	218
256.bzip2	16	213	131	16	203	137
300.twolf	16	476	117	16	459	121

Hardware

CPU:	UltraSPARC IV
CPU MHz:	1350
FPU:	Integrated
CPU(s) enabled:	16 cores, 8 chips, 2 cores/chip
CPU(s) orderable:	2,4,8 (order by # of chips)
Parallel:	No
Primary Cache:	32KBI+64KBD per core on chip (64KBI+128KBD on chip)
Secondary Cache:	8MB(I+D) per core off chip (16MB(I+D) off chip)
L3 Cache:	None
Other Cache:	None
Memory:	32GB 8-way interleaved
Disk Subsystem:	1 x 73GB
Other Hardware:	None

Software

Operating System:	Solaris 10
Compiler:	Sun Studio 9
File System:	ufs
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

Integer base flags:
  -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO4  -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=30,
              -Qeps:do_spec_load=1
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100,
              -Qeps:do_spec_load=1, -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=2 -Wc,-Qeps:enabled=1
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
              Feedback adds -xlinkopt in PASS2
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 197.parser:  -fast -xipo=2 -xalias_level=strong
              -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:  basepeak = yes
 253.perlbmk: -xO5 -xtarget=native  -xmemalign=4s -xipo -Wc,-Qeps:enabled=1
              -Qeps:ws=8, -xalias_level=std -xsafe=mem -Wc,
              -Qiselect-funcalign=32
              -Qicache-chbab=1, -Wc,-Qiselect-sw_pf_tbl_th=20,
              -Qeps:do_spec_load=1 -xprefetch=no
 254.gap:     -fast -xipo=2 -xalias_level=strong -xvector
              -xprefetch_level=3 -W2,-Abcopy
 255.vortex:  -fast -xrestrict -xipo=2
              -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
              -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:   -fast -xipo -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1 -xsafe=mem -Qeps:rp_filtering_margin=99
 300.twolf:   -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:     -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:  -DSUN
 252.eon:     -library=iostream
              srcalt=fmax_errno
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap:     -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=512K
  MPSSSTACK=512K
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
 autoup=900
 tune_t_fsflushr=1
Processes were bound to CPUs using submit=pbind
```