CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL45p (AMD Opteron (TM) 852)

SPECfp_rate2000 = 48.4

SPECfp_rate_base2000 = 43.7

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Apr-2005 | Hardware Avail: May-2005 | Software Avail: Apr-2005

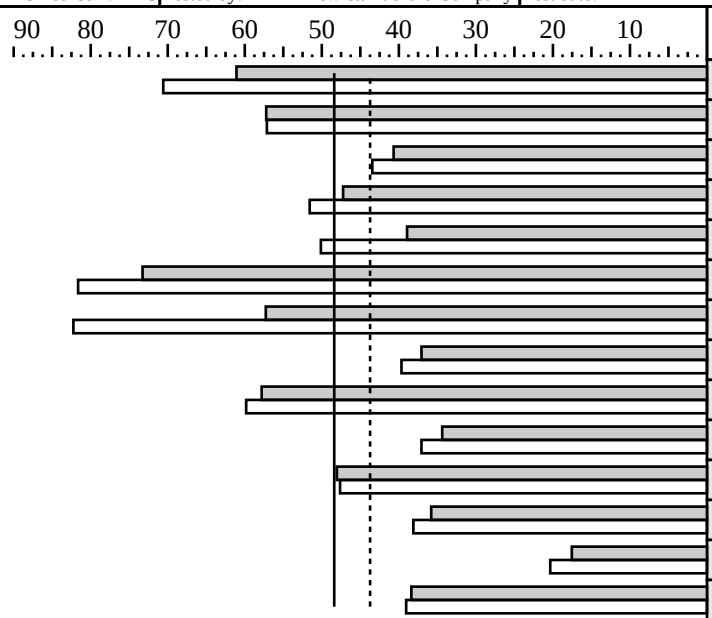

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	60.8	61.1	2	52.6	70.6
171.swim	2	126	57.2	2	126	57.1
172.mgrid	2	103	40.7	2	96.1	43.4
173.applu	2	103	47.2	2	94.5	51.6
177.mesa	2	83.4	38.9	2	64.8	50.1
178.galgel	2	91.8	73.3	2	82.4	81.6
179.art	2	105	57.3	2	73.3	82.2
183.equake	2	81.4	37.1	2	76.0	39.7
187.facerec	2	76.3	57.8	2	73.7	59.8
188.ammp	2	148	34.4	2	138	37.1
189.lucas	2	96.6	48.0	2	97.4	47.6
191.fma3d	2	136	35.8	2	128	38.1
200.sixtrack	2	145	17.5	2	125	20.3
301.apsi	2	157	38.4	2	154	39.1

Hardware

CPU:	AMD Opteron (TM) 852
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	2,4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.1 AMD Core Math Library 2.5.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3 -TENV:X=4
                 -IPA:space=1000:linear=on:plimit=50000:callee_limit=5000
                 -INLINE:aggressive=on +FDO
  171.swim:      -Ofast -LNO:fusion=2
  172.mgrid:     -O3 -LNO:fusion=2:blocking=off
                -OPT:Ofast:unroll_times_max=8:unroll_size=256:ro=3 -CG:gcm=off:cflow=off
  173.applu:     -Ofast -CG:local_fwd_sched=on
                 -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3
                 -OPT:ro=3 -TENV:X=3 -WOPT:val=2
  177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    178.galgel:    -Ofast -OPT:fast_complex -CG:use_movlpd=on RM_SOURCES=lapak.f90 +ACML
    179.art:        -O3 -OPT:ro=2:div_split=on:alias=typed -fno-math-errno -m32 +FDO
    183.equake:     -Ofast -WOPT:mem_opnds=on -CG:local_fwd_sched=on -m32
    187.facerec:    -Ofast -OPT:treeheight=on:IEEE_NaN_Inf=off:ro=3 -CG:load_exe=0
                    -LNO:fusion=2 -IPA:plimit=1500 +FDO
    188.ammp:       -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                    -fno-math-errno -TENV:X=4 -LNO:prefetch=0 +FDO
    189.lucas:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 +FDO
    191.fma3d:      -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                    -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:   -Ofast -CG:load_exe=1 +FDO
    301.apsi:       -Ofast -TENV:X=4 -LNO:fusion=2:prefetch=0
  BIOS Configuration Notes
    Node Interleaving is Disabled
```