CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant BL45p (AMD Opteron (TM) 875)

SPECint_rate2000 = 67.4

SPECint_rate_base2000 = 61.1

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Apr-2005 | Hardware Avail: May-2005 | Software Avail: Apr-2005

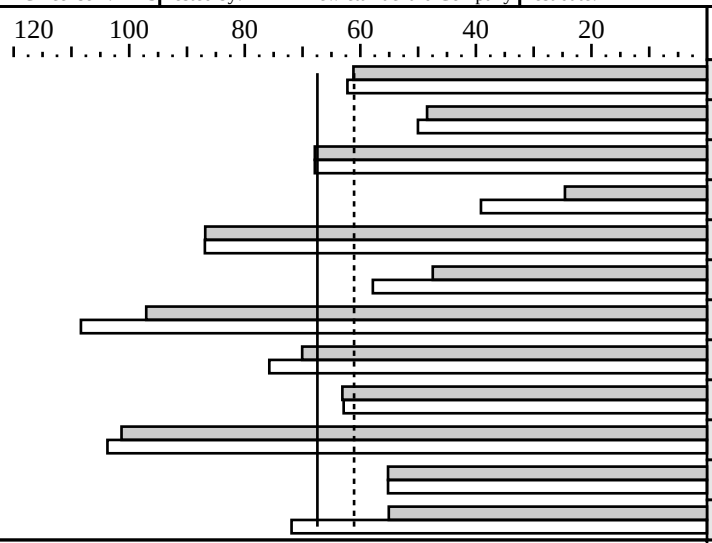

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	106	61.2	4	104	62.2
175.vpr	4	134	48.4	4	130	50.0
176.gcc	4	75.2	67.9	4	75.2	67.9
181.mcf	4	340	24.6	4	213	39.1
186.crafty	4	53.4	86.8	4	53.4	86.9
197.parser	4	176	47.5	4	144	57.8
252.eon	4	62.2	97.1	4	55.7	108
253.perlbmk	4	119	70.1	4	110	75.8
254.gap	4	80.9	63.1	4	81.2	62.9
255.vortex	4	87.0	101	4	85.0	104
256.bzip2	4	126	55.2	4	126	55.2
300.twolf	4	253	55.1	4	194	71.9

Hardware

CPU:	AMD Opteron (TM) 875
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	2,4
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
Base tuning for C programs:   -O3 -ipa +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt=fmax_errno
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_SIGNAL_PROTO  -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
               -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64 srcalt=closed_files
  300.twolf:   -DHAVE_SIGNED_CHAR
Peak tuning:
  164.gzip:    -Ofast +FDO
  175.vpr:    -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000 -INLINE:aggressive=on
               -IPA:space=300:plimit=10000:callee_limit=5000:linear=on +FDO

  176.gcc:     basepeak=true
  181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    186.crafty:  -Ofast +FDO
    197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
    252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
                -TENV:X=4:frame_pointer=off -fno-exceptions -LNO:fu=10:full_unroll_outer=on
                 -IPA:plimit=4000:pu_reorder=1 +FDO
    253.perlbmk: -O3 -ipa -IPA:plimit=10000 +FDO
    254.gap:     -O3 -ipa -OPT:transform_to_memlib=on
    255.vortex:  -Ofast -IPA:space=70:plimit=3000
                 -OPT:goto=off:unroll_analysis=off:unroll_size=0:unroll_times_max=8
                 -LNO:opt=0 -TENV:X=4 +FDO
    256.bzip2:   basepeak=true
    300.twolf:   -O2 -OPT:unroll_times_max=8:unroll_size=256:alias=disjoint:Ofast
                 -CG:gcm=off:p2align_freq=100000 -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
  Taskset utility used to bind process to CPU(s)
```