CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro
H8DA8 (AMD Opteron (TM) 252)

SPECint2000 = 1777

SPECint_base2000 = 1656

SPEC license #01176 | Tested by: Supermicro | Test date: May-2005 | Hardware Avail: Mar-2005 | Software Avail: Jul-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	97.7	1433	97.7	1433
175.vpr	1400	103	1362	98.8	1417
176.gcc	1100	58.8	1872	58.2	1889
181.mcf	1800	177	1016	139	1292
186.crafty	1000	59.8	1674	54.0	1852
197.parser	1800	114	1585	112	1605
252.eon	1300	53.4	2433	46.7	2785
253.perlbmk	1800	106	1704	106	1704
254.gap	1100	60.5	1819	60.5	1819
255.vortex	1900	76.2	2493	69.5	2732
256.bzip2	1500	112	1341	110	1365
300.twolf	3000	175	1714	143	2092

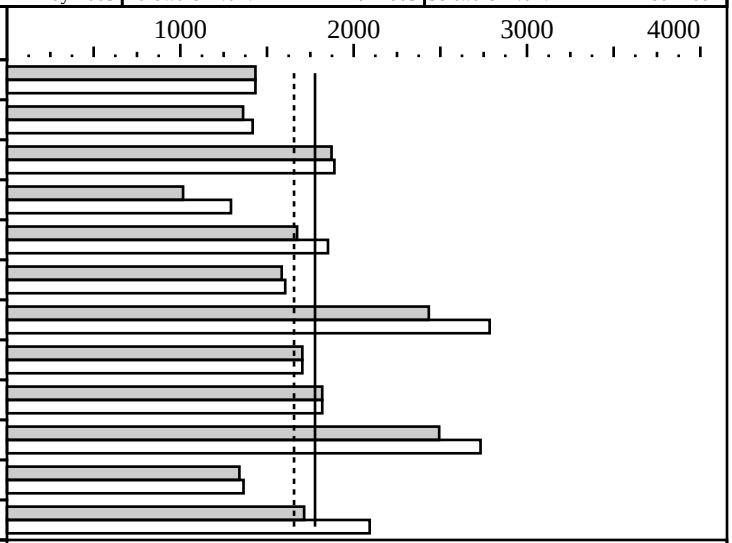

Hardware

CPU:	AMD Opteron (TM) 252
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 x 1024MB PC3200 REG ECC CL3 DDR SDRAM
Disk Subsystem:	1 X 300GB IDE
Other Hardware:	None

Software

Operating System:	Windows Enterprise Server 2003
Compiler:	Intel C++ 8.0 build 20040714Z Microsoft Visual Studio .NET 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Tested by Supermicro
  shlW32M7.lib is the SmartHeap library V7.0 from MicroQuill www.microquill.com
  +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
  Portability:
    176.gcc:      -Dalloca=_alloca /F10000000
    186.crafty:   -DNT_i386
    253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
    254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
  Baseline C:   -fast -arch:SSE2 -Oi- +FDO
  Baseline C++: -fast -arch:SSE2 -GX -GR
 Peak Tuning:
  164.gzip:     basepeak=yes
  175.vpr:      -fast -arch:SSE2 +FDO
                -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
  176.gcc:      -fast -arch:SSE2 +FDO -Oi- -Qunroll3
  181.mcf:      -fast -QaxN      +FDO
  186.crafty:   -fast -arch:SSE2 +FDO
  197.parser:         -arch:SSE2 +FDO -Oi- -Qipo
  252.eon:      -fast -arch:SSE2 +FDO -Qansi_alias
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
253.perlbmk:  basepeak=yes
254.gap:      basepeak=yes
255.vortex:   -fast -arch:SSE  +FDO -Oi- shlW32M7.lib
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
256.bzip2:    -fast                        -Qunroll2
300.twolf:    -fast -arch:SSE2 +FDO        -Qunroll3 shlW32M7.lib -Qansi_alias
Tested system can be used with a 420W (minimum) ATX power supply
```