CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

AMD Opteron LS20 for IBM eServer Blade Center (AMD Opteron (TM) 270)

SPECint_rate2000 = 61.1

SPECint_rate_base2000 = 54.9

SPEC license #: 11 | Tested by: IBM, Inc. | Test date: May-2005 | Hardware Avail: Apr-2005 | Software Avail: Apr-2005

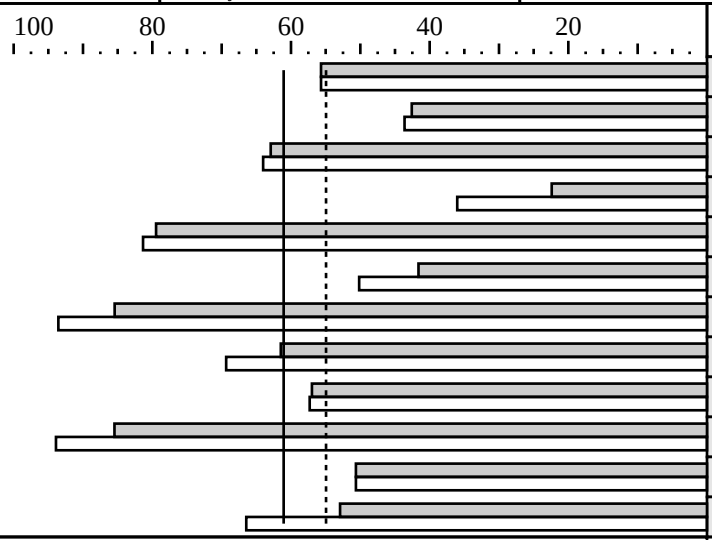

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	117	55.7	4	117	55.7
175.vpr	4	153	42.6	4	149	43.6
176.gcc	4	81.1	62.9	4	79.7	64.0
181.mcf	4	373	22.4	4	232	36.0
186.crafty	4	58.4	79.5	4	57.0	81.3
197.parser	4	201	41.6	4	166	50.2
252.eon	4	70.6	85.4	4	64.5	93.6
253.perlbmk	4	136	61.5	4	120	69.4
254.gap	4	89.6	57.0	4	89.1	57.3
255.vortex	4	103	85.5	4	93.9	93.9
256.bzip2	4	137	50.6	4	137	50.6
300.twolf	4	263	52.9	4	209	66.5

Hardware

CPU:	AMD Opteron 270
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 x 2048MB, DDR400
Disk Subsystem:	SCSI, 36GB 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SLES 64 bit Kernel 2.6.5-7.151-smp (SP1)
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM, Inc.

 +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

 Baseline optimization flags:
   C programs:       -Ofast +FDO
   C++ programs:     -Ofast +FDO

 Portability Flags:
   176.gcc:      srcalt 64bitgcc
   186.crafty:  -DLINUX_i386
   252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt fmax_errno
   253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
   254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_SIGNAL_PROTO  -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
                -DSPEC_CPU2000_LP64
   255.vortex:  -DSPEC_CPU2000_LP64 srcalt closed_files

 Peak Tuning:
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
164.gzip: basepeak = true
175.vpr: -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000
         -INLINE:aggressive=on -IPA:plimit=10000:callee_limit=5000
         +FDO
176.gcc: -O3 -ipa -OPT:goto=off +FDO
181.mcf: -O3 -ipa -IPA:field_reorder=on -m32 +FDO
186.crafty:  -O3 -OPT:goto=off +FDO
197.parser: -O3 -ipa -m32 -IPA:ctype=on +FDO
252.eon: -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
         -TENV:X=4:frame_pointer=off -fno-exceptions
         -LNO:fu=10:full_unroll_outer=on -IPA:plimit=4000 +FDO
253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
             -fno-math-errno -IPA:plimit=10000 +FDO
254.gap:     -Ofast -WOPT:aggstr=off +FDO
255.vortex: -Ofast -OPT:goto=off -IPA:plimit=1800 -CG:p2align=on
            +FDO
256.bzip2: basepeak = true
300.twolf: -O2 -CG:gcm=off:p2align_freq=100000
           -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
           -WOPT:mem_opnds=on -m32 +FDO
```