CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 252)

SPECint2000 = 1708

SPECint_base2000 = 1549

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2005 | Hardware Avail: May-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	90.1	1553	88.8	1577
175.vpr	1400	121	1158	117	1196
176.gcc	1100	62.2	1769	62.2	1769
181.mcf	1800	263	686	165	1091
186.crafty	1000	45.0	2220	44.9	2226
197.parser	1800	151	1191	125	1437
252.eon	1300	52.8	2464	47.3	2750
253.perlbmk	1800	105	1719	97.9	1839
254.gap	1100	65.7	1673	65.8	1673
255.vortex	1900	81.4	2333	80.0	2375
256.bzip2	1500	107	1403	107	1403
300.twolf	3000	211	1422	159	1881

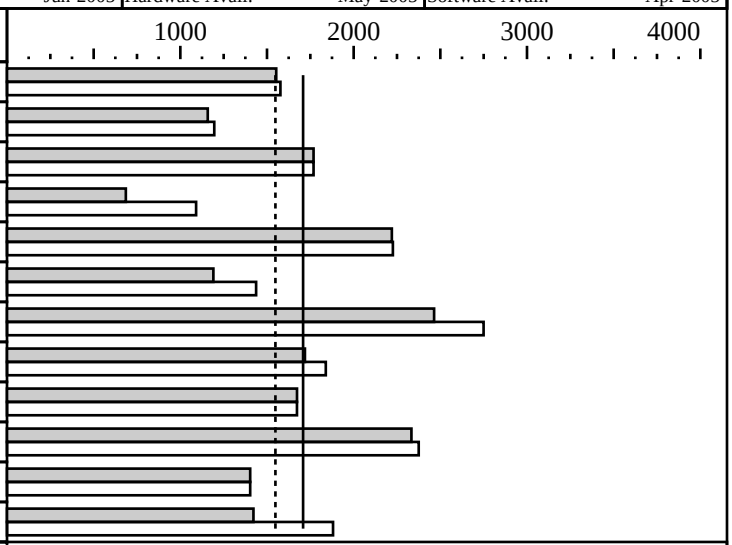

Hardware

CPU:	AMD Opteron (TM) 252
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	2,4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
Base tuning for C programs:   -O3 -ipa +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt=fmax_errno
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_SIGNAL_PROTO  -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
               -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64
Peak tuning:
  164.gzip:    -Ofast +FDO
  175.vpr:     -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000 -INLINE:aggressive=on
               -IPA:space=300:plimit=10000:callee_limit=5000:linear=on +FDO
  176.gcc:     basepeak=true
  181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
  186.crafty:  -Ofast +FDO
  197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
                -TENV:X=4:frame_pointer=off -fno-exceptions -LNO:fu=10:full_unroll_outer=on
                 -IPA:plimit=4000:pu_reorder=1 +FDO
    253.perlbmk: -O3 -ipa -IPA:plimit=10000 +FDO
    254.gap:     -O3 -ipa -OPT:transform_to_memlib=on +FDO
    255.vortex:  -Ofast -IPA:space=70:plimit=3000
                 -OPT:goto=off:unroll_analysis=off:unroll_size=0:unroll_times_max=8
    256.bzip2:   basepeak=true
    300.twolf:   -O2 -OPT:unroll_times_max=8:unroll_size=256:alias=disjoint:Ofast
                 -CG:gcm=off:p2align_freq=100000 -WOPT:mem_opnds=on -m32 +FDO
  BIOS Configuration Notes
    Node Interleaving Disabled
  Other Configuration Notes
     Taskset utility used to bind process to CPU(s)
```