CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant BL25p (AMD Opteron (TM) 275)

SPECint2000 = 1508

SPECint_base2000 = 1374

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2005 | Hardware Avail: Jul-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	107	1313	105	1337
175.vpr	1400	129	1084	125	1123
176.gcc	1100	71.7	1533	71.7	1533
181.mcf	1800	264	682	167	1080
186.crafty	1000	53.4	1872	53.2	1880
197.parser	1800	171	1054	144	1249
252.eon	1300	62.2	2091	56.2	2315
253.perlbmk	1800	121	1492	112	1606
254.gap	1100	75.0	1468	75.0	1468
255.vortex	1900	87.0	2185	85.7	2218
256.bzip2	1500	120	1247	120	1247
300.twolf	3000	243	1235	191	1573

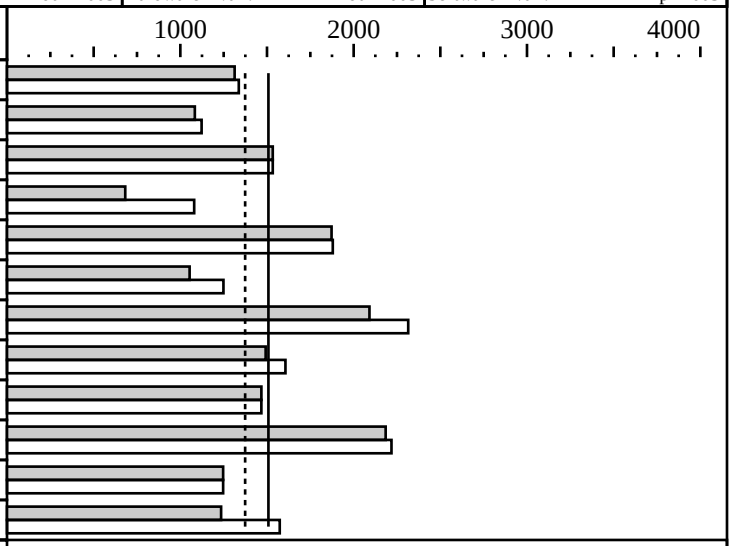

Hardware

CPU:	AMD Opteron (TM) 275
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.2GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-default
Compiler:	PathScale EKO Compiler Suite, Release 2.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
Base tuning for C programs:   -O3 -ipa +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt=fmax_errno
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_SIGNAL_PROTO  -DSYS_HAS_ANSI -DSYS_HAS_CALLOC_PROTO
               -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64 srcalt=closed_files
Peak tuning:
  164.gzip:    -Ofast +FDO
  175.vpr:     -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000 -INLINE:aggressive=on
               -IPA:space=300:plimit=10000:callee_limit=5000:linear=on +FDO
  176.gcc:     basepeak=true
  181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
  186.crafty:  -Ofast +FDO
  197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -OPT:treeheight=on
                -TENV:X=4:frame_pointer=off -fno-exceptions -LNO:fu=10:full_unroll_outer=on
                 -IPA:plimit=4000:pu_reorder=1 +FDO
    253.perlbmk: -O3 -ipa -IPA:plimit=10000 +FDO
    254.gap:     -O3 -ipa -OPT:transform_to_memlib=on +FDO
    255.vortex:  -Ofast -IPA:space=70:plimit=3000
                -OPT:goto=off:unroll_analysis=off:unroll_size=0:unroll_times_max=8 +FDO
    256.bzip2:   basepeak=true
    300.twolf:   -O2 -OPT:unroll_times_max=8:unroll_size=256:alias=disjoint:Ofast
                 -CG:gcm=off:p2align_freq=100000 -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
   Taskset utility used to bind process to CPU(s)
   Single-processor kernel was used
```