CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

TYAN S2865 K8E Tomcat, AMD Opteron (TM) 152

SPECint2000 = 1818

SPECint_base2000 = 1713

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Jul-2005 | Hardware Avail: Aug-2005 | Software Avail: Aug-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	97.3	1439	97.3	1439
175.vpr	1400	98.2	1426	94.8	1477
176.gcc	1100	57.3	1920	57.1	1926
181.mcf	1800	156	1150	128	1410
186.crafty	1000	59.8	1671	53.7	1863
197.parser	1800	109	1653	109	1654
252.eon	1300	53.2	2445	47.5	2740
253.perlbmk	1800	102	1759	102	1759
254.gap	1100	60.4	1821	60.4	1821
255.vortex	1900	73.2	2594	67.2	2829
256.bzip2	1500	108	1388	107	1405
300.twolf	3000	166	1809	143	2098

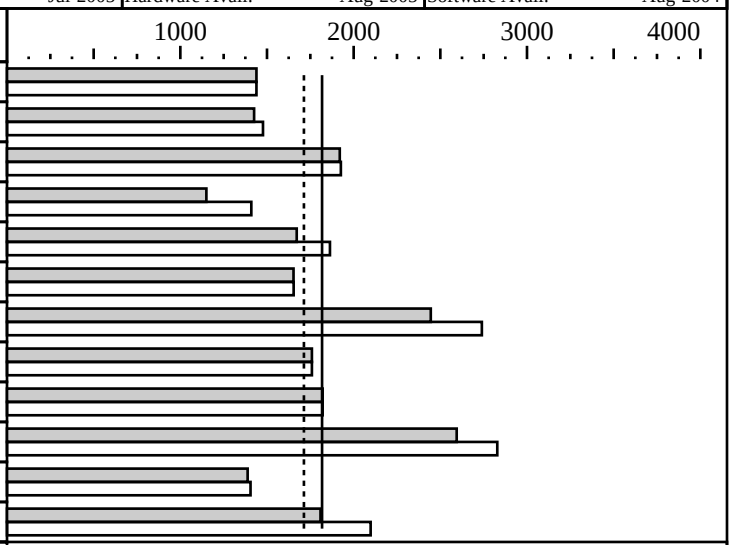

Hardware

CPU:	AMD Opteron (TM) 152 (939-pin)
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512 MB DDR400 CL2.0
Disk Subsystem:	SATA, Western Digital WD740GD, 10000 rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows XP Pro SP2
Compiler:	Intel C++ 8.0 build 20040714Z Microsoft Visual Studio .NET 7.0.9466 (libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
shlW32M7.lib is the SmartHeap library V7.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
  176.gcc:      -Dalloca=_alloca /F10000000
  186.crafty:   -DNT_i386
  253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:      -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -fast -arch:SSE2 -Oi- +FDO
Baseline C++: -fast -arch:SSE2 -GX -GR
Peak Tuning:
164.gzip:     basepeak=yes
175.vpr:      -fast -arch:SSE2 +FDO
              -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
176.gcc:      -fast -arch:SSE2 +FDO -Oi- -Qunroll3
181.mcf:      -fast -QaxN      +FDO
186.crafty:   -fast -arch:SSE2 +FDO
197.parser:         -arch:SSE2 +FDO -Oi- -Qipo
252.eon:      -fast -arch:SSE2 +FDO -Qansi_alias
             -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
253.perlbmk:  basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 254.gap:      basepeak=yes
 255.vortex:   -fast -arch:SSE  +FDO -Oi- shlW32M7.lib
               -Qoption,c,-ip_ninl_max_stats=2000,-ip_ninl_max_total_stats=4500
 256.bzip2:    -fast                        -Qunroll2
 300.twolf:    -fast -arch:SSE2 +FDO        -Qunroll3 shlW32M7.lib -Qansi_alias
The tested system can be assembled using a standard ATX footprint, an Antec True 550
Watt EPS12V power supply, and a PCI or PCIe graphics card.
All memory slots were populated with Corsair CMX512-3200XL.
Memory timings manually set in BIOS: CAS=2, TRCD=2, TRAS=5, TRP=2
BIOS version 1.01
```