CFP2000 Result

Advanced Micro Devices

Pogo Linux, PerformanceWare 3566, AMD Opteron (TM) 852

SPECfp_rate2000 = 35.7

SPECfp_rate_base2000 = 33.8

SPEC license #: 49	Tested by: AMD, Austin, TX	Test date: Jul-2005	Hardware Avail: May-2005	Software Avail: Jan-2005

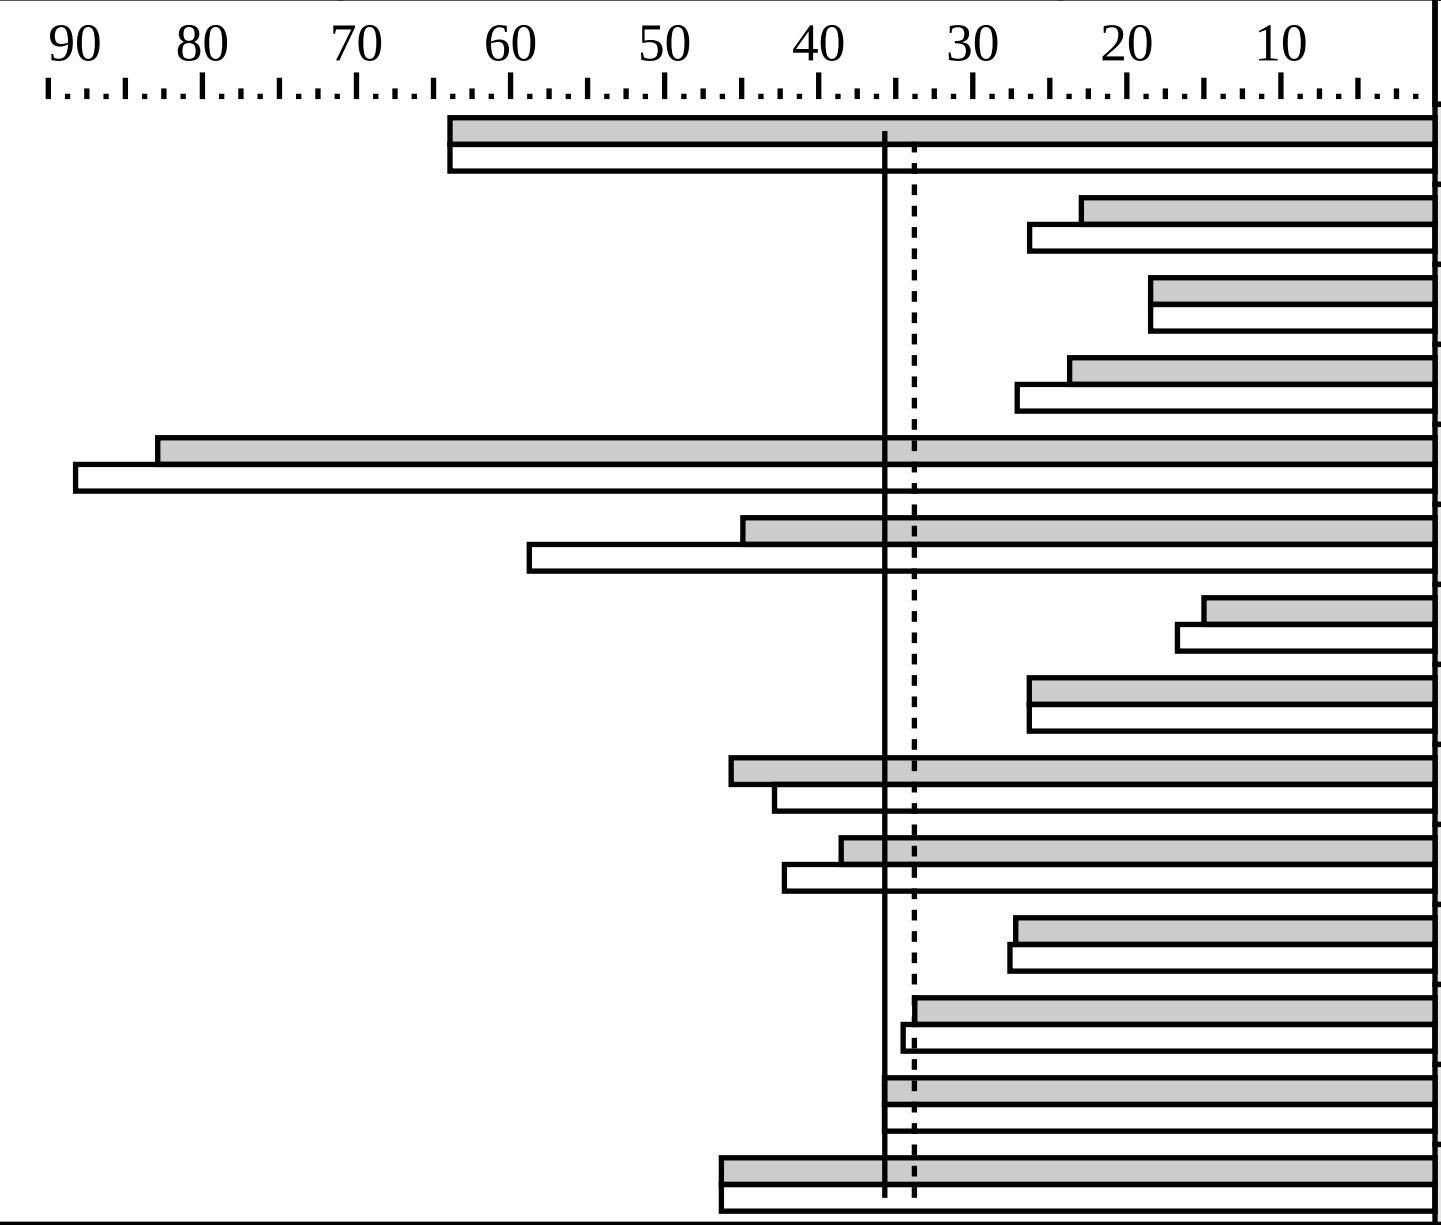

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	116	63.9	4	116	63.9
171.swim	4	627	23.0	4	547	26.3
172.mgrid	4	453	18.5	4	453	18.5
173.applu	4	411	23.7	4	359	27.1
177.mesa	4	78.4	82.9	4	73.6	88.2
178.galgel	4	300	44.9	4	229	58.8
179.art	4	805	15.0	4	722	16.7
183.equake	4	229	26.3	4	229	26.3
187.facerec	4	193	45.7	4	206	42.9
188.ammp	4	265	38.5	4	242	42.2
189.lucas	4	341	27.2	4	336	27.6
191.fma3d	4	289	33.8	4	282	34.5
200.sixtrack	4	143	35.7	4	143	35.7
301.apsi	4	260	46.3	4	260	46.3

Hardware

CPU:	AMD Opteron (TM) 852
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	4 cores, 4 chips, 1 core/chip
CPU(s) orderable:	1-4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x1024 MB PC3200 CL3 ECC Reg
Disk Subsystem:	SCSI, Seagate Cheetah Ultra320 ST336607LC, 10K rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows Server 2003 Enterprise Edition
Compiler:	Intel C++ 8.0 build 20040714Z, Intel Fortran 8.1 for IA32 build 20041019Z, PGI Fortran compiler 5.2-4 for Windows XP, AMD Core Math library Version 2.1 (ACML), Microsoft Visual Studio .NET 7.0.9466 (libraries), MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
+ACML is linking with AMD Core Math Library V2.1
ONESTEP is set for all peak runs.
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran compiler.
The Intel C++ 8.0 and the Intel Fortran 8.1 compilers are setup in the following order:
   "c:program filesintel ortrancompiler80ia32 inifortvars.bat"
   "c:program filesintelcppcompiler80ia32 iniclvars.bat"
To make sure that the correct libraries are selected, the following link option is
added for the peak runs where Intel Fortran 8.1 compiler is used:
    LDOPT = -Fe$@ -link -LIBPATH:"c:program filesintel ortrancompiler80ia32lib"
 (denoted by +LIBPATH:INTEL8.1 in the optimization flags listed below)
Portability:
  178.galgel: -Mfixed
Baseline: C      : icl   -fast -arch:SSE2 -QaxW +FDO
Baseline: Fortran: pgf90 -fastsse -Mipa=fast,inline
```

CFP2000 Result

Advanced Micro Devices

Pogo Linux, PerformanceWare 3566, AMD Opteron (TM) 852

SPECfp_rate2000 =	35.7
SPECfp_rate_base2000 =	33.8

SPEC license #:	49	Tested by:	AMD, Austin, TX	Test date:	Jul-2005	Hardware Avail:	May-2005	Software Avail:	Jan-2005

Notes/Tuning Information (Continued)

```
Peak tuning:
168.wupwise:       pgf90 basepeak=yes
171.swim:          ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0     +LIBPATH:INTEL8.1
172.mgrid:         pgf90 basepeak=yes
173.applu:         ifort -Qipo  -O3  -QaxN -QxW +FDO -auto         +LIBPATH:INTEL8.1
177.mesa:          icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias
                       -Qoption,f,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
179.art:           icl   -Qipo             -Zp4 +FDO
183.equake:        icl   basepeak=yes
178.galgel:        pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML
187.facerec:       ifort -Qipo             -QxW +FDO -Qunroll3     +LIBPATH:INTEL8.1
                       -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias
189.lucas:         ifort -Qipo             -QxW      -Qunroll1     +LIBPATH:INTEL8.1
191.fma3d:         ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias- +LIBPATH:INTEL8.1
200.sixtrack:      pgf90 basepeak=yes
301.apsi:          pgf90 basepeak=yes
Bios V2.33.1.1
All memory slots populated on CPU0.
Physical Address Extension (PAE) enabled
```