CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant BL25p (AMD Opteron (TM) 275)

SPECint2000 = 1515

SPECint_base2000 = 1443

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jul-2005 | Hardware Avail: Jun-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	117	1194	117	1194
175.vpr	1400	118	1187	114	1227
176.gcc	1100	68.1	1615	67.8	1623
181.mcf	1800	176	1023	148	1219
186.crafty	1000	71.0	1409	64.2	1557
197.parser	1800	132	1366	132	1368
252.eon	1300	60.5	2148	55.7	2334
253.perlbmk	1800	125	1435	125	1435
254.gap	1100	71.8	1533	71.8	1533
255.vortex	1900	84.7	2244	85.1	2232
256.bzip2	1500	129	1164	127	1183
300.twolf	3000	204	1469	172	1743

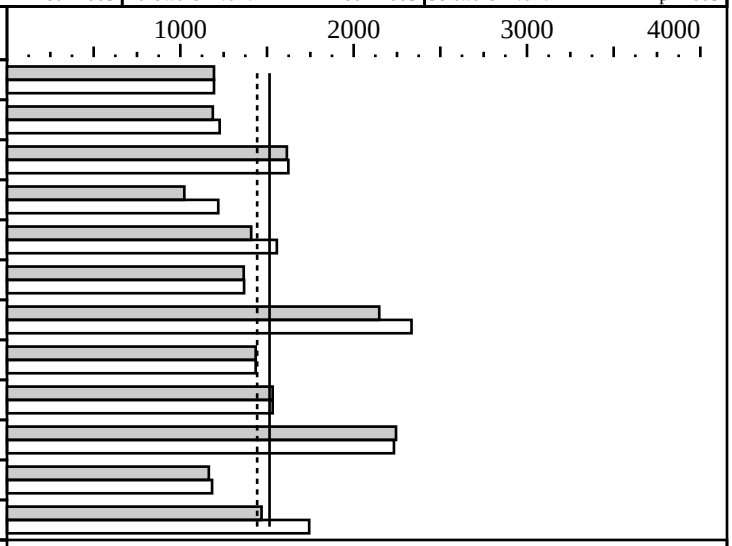

Hardware

CPU:	AMD Opteron (TM) 275
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler 8.0 Build 20040318Z Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -arch:SSE2 -GX -GR ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafy: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:       -fast -arch:SSE2 +FDO shlw32M.lib ONESTEP=yes
  175.vpr:       -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:       basepeak=yes
  181.mcf:       -fast -QaxN +FDO ONESTEP=yes
  186.crafty:     -fast -QxW + FDO ONESTEP=yes
  197.parser:     -arch:SSE2 -Oi- -Qipo +FDO ONESTEP=yes
  252.eon:      -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk:    -Qipo -arch:SSE2 +FDO shlw32M.lib ONESTEP=yes
  254.gap:      -fast -arch:SSE2 -Oi- -Oa -Qoption,c,-ip_ninl_max_stats=500
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                  -Qoption,c,-ip_ninl_max_total_stats=3000 +FDO ONESTEP=yes
    255.vortex:    -fast -arch:SSE -Oi- -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO shlw32M.lib ONESTEP=yes
    256.bzip2:     -fast -Qunroll2
    300.twolf:     -QxW -Qipo -O3 +FDO shlw32M.lib ONESTEP=yes
  Other Configuration Notes
    /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
  BIOS Configuration Notes
    Node Interleaving Disabled
```