CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 (AMD Opteron (TM) 280)

SPECfp2000 = 1791

SPECfp_base2000 = 1637

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: May-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	63.7	2514	63.7	2514
171.swim	3100	139	2235	139	2227
172.mgrid	1800	119	1509	119	1509
173.applu	2100	150	1398	139	1508
177.mesa	1400	149	942	74.5	1878
178.galgel	2900	107	2717	97.9	2963
179.art	2600	63.8	4072	63.8	4073
183.equake	1300	83.4	1559	83.4	1559
187.facerec	1900	105	1804	105	1803
188.ammp	2200	198	1109	159	1382
189.lucas	2000	116	1727	101	1983
191.fma3d	2100	144	1457	137	1534
200.sixtrack	1100	151	730	151	730
301.apsi	2600	185	1405	185	1405

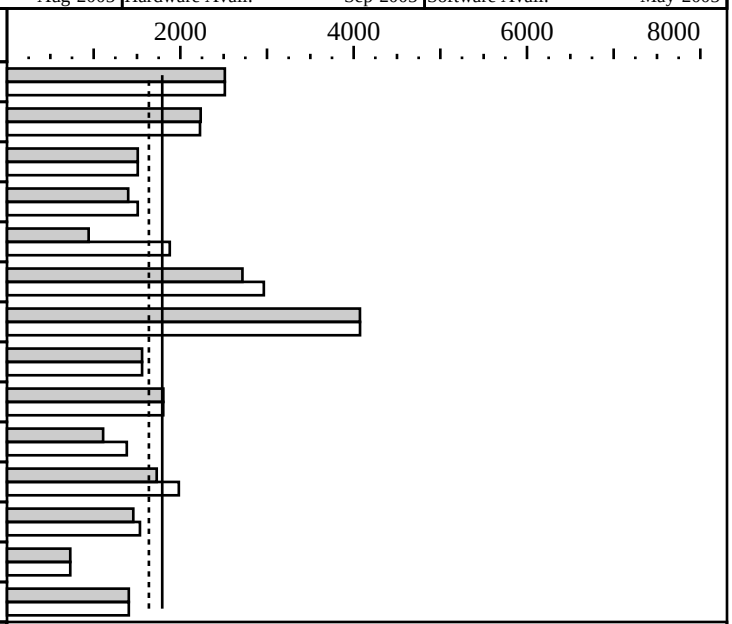

Hardware

CPU:	AMD Opteron (TM) 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 8.1 Build 20050524Z) Intel Fortran Compiler for 32-bit applications, (version 8.1 build 20050517Z) PGI Fortran compiler 6.0-4 for Windows XP (32-bit) PGI C compiler 6.0-4 for Windows XP (32-bit) Microsoft Visual Studio .NET 7.0.9466 (for libraries) AMD Core Math Library V2.6.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
 +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
 +ACML is linking with AMD Core Math Library V2.6.0
 ONESTEP is set for all peak runs.
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
 pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:       pgcc  -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
 168.wupwise:       pgf90 basepeak=yes
 171.swim:          ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0
 172.mgrid:         pgf90 basepeak=yes
 173.applu:         ifort -Qipo  -O3  -QaxN -QxW +FDO -auto
 177.mesa:          icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias
                        -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:       pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 179.art:           pgcc  -fastsse -Mipa=fast,inline
 183.equake:        icl   basepeak=yes
 187.facerec:       ifort -Qipo            -QxW +FDO -Qunroll3
                        -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
 188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias
 189.lucas:         ifort -Qipo            -QxW      -Qunroll1
 191.fma3d:         ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias-
 200.sixtrack:      pgf90 basepeak=yes
 301.apsi:          pgf90 basepeak=yes
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```