CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 (AMD Opteron (TM) 254)

SPECfp2000 = 1983

SPECfp_base2000 = 1805

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: May-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	56.9	2811	56.9	2811
171.swim	3100	138	2250	132	2343
172.mgrid	1800	107	1686	107	1686
173.applu	2100	141	1491	128	1638
177.mesa	1400	128	1090	64.0	2187
178.galgel	2900	96.3	3012	89.4	3243
179.art	2600	58.7	4430	58.6	4440
183.equake	1300	77.7	1674	77.7	1674
187.facerec	1900	94.6	2009	93.8	2025
188.ammp	2200	177	1243	140	1571
189.lucas	2000	109	1834	96.2	2079
191.fma3d	2100	129	1625	123	1702
200.sixtrack	1100	130	849	130	849
301.apsi	2600	163	1591	163	1591

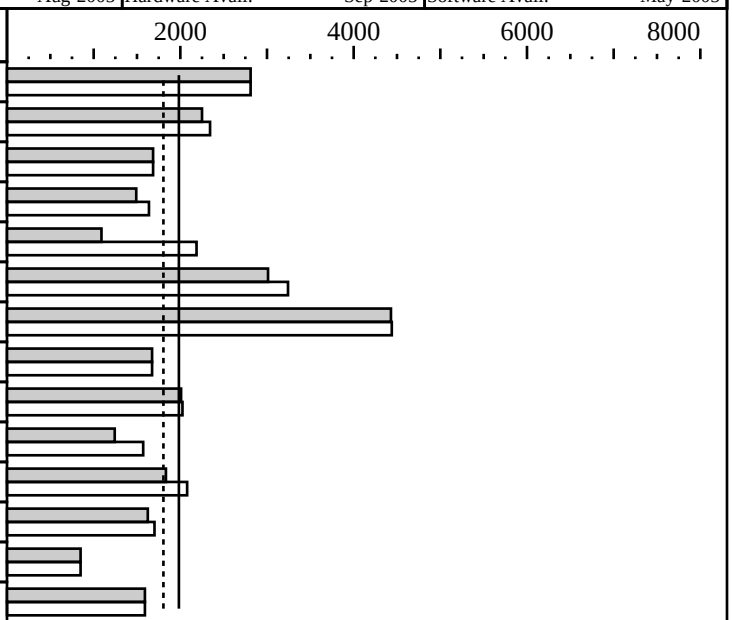

Hardware

CPU:	AMD Opteron (TM) 254
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (version 8.1 Build 20050524Z) Intel Fortran Compiler for 32-bit applications, (version 8.1 build 20050517Z) PGI Fortran compiler 6.0-4 for Windows XP (32-bit) PGI C compiler 6.0-4 for Windows XP (32-bit) Microsoft Visual Studio .NET 7.0.9466 (for libraries) AMD Core Math Library V2.6.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
 +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
 +ACML is linking with AMD Core Math Library V2.6.0
 ONESTEP is set for all peak runs.
 ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
 pgf90 is the PGI Fortran compiler, pgcc is the PGI C compiler.
Base tuning for C programs:       pgcc  -fastsse -Mipa=fast,inline
Base tuning for FORTRAN programs: pgf90 -fastsse -Mipa=fast,inline +FDO
Portability flags:
  178.galgel: -Mfixed
Peak tuning:
 168.wupwise:       pgf90 basepeak=yes
 171.swim:          ifort -Qipo  -O3  -QaxN -QxW +FDO -Qunroll0
 172.mgrid:         pgf90 basepeak=yes
 173.applu:         ifort -Qipo  -O3  -QaxN -QxW +FDO -auto
 177.mesa:          icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias
                        -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:       pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 179.art:           pgcc  -fastsse -Mipa=fast,inline
 183.equake:        icl   basepeak=yes
 187.facerec:       ifort -Qipo            -QxW +FDO -Qunroll3
                        -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
 188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias
 189.lucas:         ifort -Qipo            -QxW      -Qunroll1
 191.fma3d:         ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias-
 200.sixtrack:      pgf90 basepeak=yes
 301.apsi:          pgf90 basepeak=yes
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```