CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant DL385 (AMD Opteron (TM) 254)

SPECint2000 = 1914

SPECint_base2000 = 1817

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: Mar-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	91.1	1536	91.1	1536
175.vpr	1400	94.9	1476	91.9	1524
176.gcc	1100	53.8	2045	53.2	2068
181.mcf	1800	152	1180	127	1419
186.crafty	1000	54.8	1824	49.9	2006
197.parser	1800	104	1730	104	1732
252.eon	1300	47.0	2765	43.1	3018
253.perlbmk	1800	96.8	1860	96.8	1860
254.gap	1100	56.7	1942	56.7	1942
255.vortex	1900	68.0	2796	67.4	2819
256.bzip2	1500	104	1449	102	1467
300.twolf	3000	162	1851	133	2253

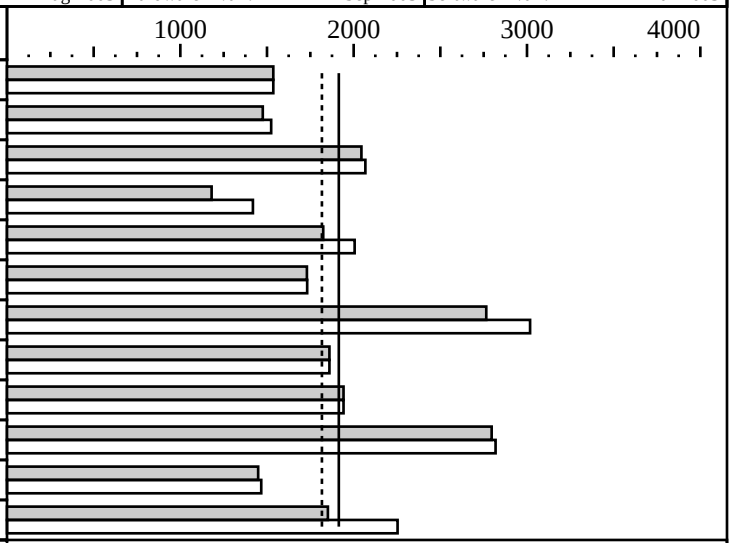

Hardware

CPU:	AMD Opteron (TM) 254
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler 8.0 Build 20031211Z Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -GX -GR +FDO ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:       basepeak=yes
  175.vpr:    -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:    -fast -arch:SSE2 -Oi- -Qunroll3 +FDO
  181.mcf:    -fast -QaxN +FDO ONESTEP=yes
  186.crafty:     -fast -arch:SSE2 +FDO ONESTEP=yes
  197.parser:     -arch:SSE2 -Oi- -Qipo +FDO ONESTEP=yes
  252.eon:   -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk:    basepeak=yes
  254.gap:   basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  255.vortex:     -fast -arch:SSE2 -Oi- -Qoption,c,-ip_ninl_max_stats=2000
                 -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO shlw32M.lib ONESTEP=yes
  256.bzip2:   -fast -Qunroll2
  300.twolf:   -fast -arch:SSE2 -Qansi_alias +FDO shlw32M.lib ONESTEP=yes
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```