CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL45p (AMD Opteron (TM) 854)

SPECfp_rate2000 = 52.4

SPECfp_rate_base2000 = 47.5

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: Apr-2005

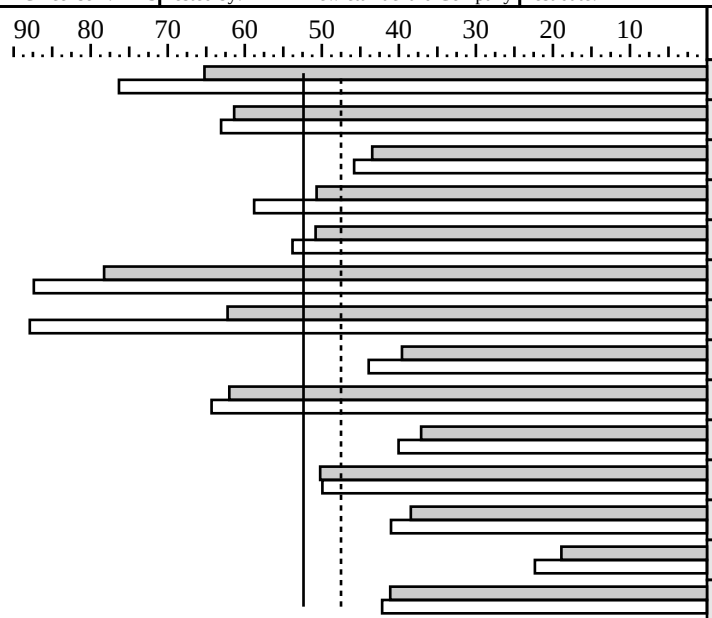

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	56.9	65.2	2	48.6	76.3
171.swim	2	117	61.4	2	114	63.1
172.mgrid	2	96.1	43.5	2	91.2	45.8
173.applu	2	96.1	50.7	2	82.9	58.8
177.mesa	2	63.9	50.8	2	60.4	53.8
178.galgel	2	86.0	78.3	2	77.0	87.4
179.art	2	96.9	62.2	2	68.6	87.9
183.equake	2	76.2	39.6	2	68.7	43.9
187.facerec	2	71.1	62.0	2	68.5	64.3
188.ammp	2	138	37.1	2	127	40.0
189.lucas	2	92.4	50.2	2	92.9	49.9
191.fma3d	2	127	38.4	2	119	41.0
200.sixtrack	2	135	18.9	2	114	22.3
301.apsi	2	147	41.1	2	143	42.2

Hardware

CPU:	AMD Opteron (TM) 854
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1, 2, 4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-smp
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.1 AMD Core Math Library 2.5.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
  171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:     -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
               -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2 -WOPT:mem_opnds=on:aggstr=0
  173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                 -LNO:fusion=2:fission=2:full_unroll_size=10000
  177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                 -WOPT:mem_opnds=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   178.galgel:    -Ofast -OPT:fast_complex-on RM_SOURCES=lapak.f90 +ACML
   179.art:       -O3 -OPT:ro=2:div_split=on:alias=typed -fno-math-errno -m32 +FDO
   183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
   187.facerec:   -Ofast -OPT:treeheight=on:IEEE_NaN_Inf=off:ro=3 -CG:load_exe=0 -LNO:fusion=2
                  -IPA:plimit=1500 +FDO
   188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                  -fno-math-errno -TENV:X=4 +FDO
   189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
   191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                  -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
   200.sixtrack:  -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on -fno-math-errno
                  -CG:load_exe=1 +FDO
   301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
   Taskset utility used to bind process to CPU(s)
```