CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL45p (AMD Opteron (TM) 854)

SPECfp2000 = 2260

SPECfp_base2000 = 2052

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	56.6	2825	48.6	3293
171.swim	3100	118	2635	114	2720
172.mgrid	1800	95.9	1877	90.8	1982
173.applu	2100	95.9	2190	82.6	2541
177.mesa	1400	64.2	2179	60.5	2314
178.galgel	2900	85.2	3405	76.3	3802
179.art	2600	95.7	2716	69.6	3735
183.equake	1300	75.6	1720	68.0	1912
187.facerec	1900	70.8	2682	68.0	2796
188.ammp	2200	137	1601	128	1725
189.lucas	2000	92.4	2164	92.8	2156
191.fma3d	2100	127	1658	119	1770
200.sixtrack	1100	136	811	115	959
301.apsi	2600	147	1766	144	1810

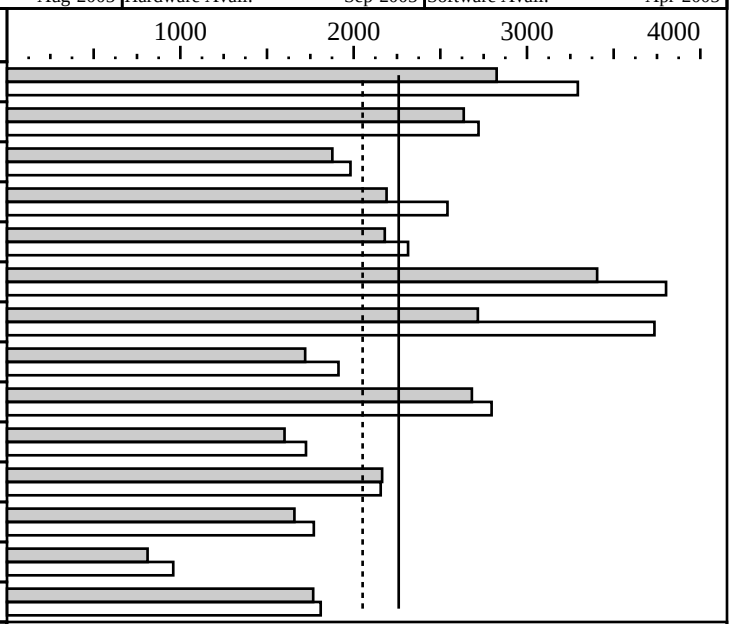

Hardware

CPU:	AMD Opteron (TM) 854
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1, 2, 4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-default
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.1 AMD Core Math Library 2.5.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
  171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:     -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
               -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2 -WOPT:mem_opnds=on:aggstr=0
  173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                 -LNO:fusion=2:fission=2:full_unroll_size=10000
  177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                 -WOPT:mem_opnds=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    178.galgel:    -Ofast -OPT:fast_complex-on RM_SOURCES=lapak.f90 +ACML
    179.art:       -O3 -OPT:ro=2:div_split=on:alias=typed -fno-math-errno -m32 +FDO
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
    187.facerec:   -Ofast -OPT:treeheight=on:IEEE_NaN_Inf=off:ro=3 -CG:load_exe=0 -LNO:fusion=2
                   -IPA:plimit=1500 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on -fno-math-errno
                   -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Single-processor kernel was used
```