CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant BL25p (AMD Opteron (TM) 280)

SPECint2000 = 1663

SPECint_base2000 = 1498

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	96.1	1456	96.7	1448
175.vpr	1400	118	1185	115	1212
176.gcc	1100	64.9	1694	63.8	1724
181.mcf	1800	244	736	154	1167
186.crafty	1000	48.8	2049	47.6	2099
197.parser	1800	157	1146	132	1362
252.eon	1300	56.9	2283	51.5	2522
253.perlbmk	1800	112	1605	98.3	1832
254.gap	1100	68.9	1597	66.5	1654
255.vortex	1900	80.1	2372	76.2	2492
256.bzip2	1500	110	1358	110	1358
300.twolf	3000	223	1343	175	1713

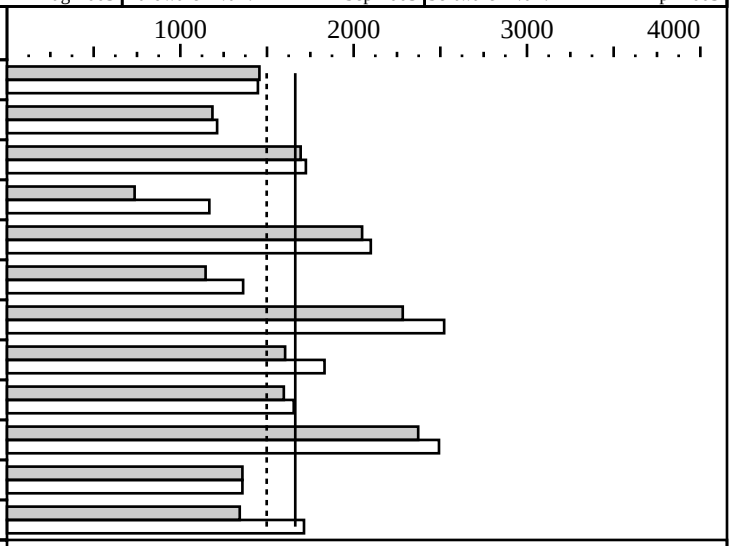

Hardware

CPU:	AMD Opteron (TM) 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1, 2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 1 SuSE kernel 2.6.5-7.139-default
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
Base tuning for C programs:   -Ofast +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
  176.gcc:     srcalt=64bitgcc
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64 srcalt=fmax_errno
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64 srcalt=closed_files
Peak tuning:
  164.gzip:    -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
  175.vpr:     -O2 -ipa -OPT:alias=disjoint -CG:p2align_freq=500000
               -INLINE:aggressive=on
               -IPA:space=300:plimit=10000:callee_limit=5000:linear=on +FDO
  176.gcc:     -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
  181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
  186.crafty:  -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
    252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
                 -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exceptions
                 -LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
    253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
                 -fno-math-errno -IPA:plimit=10000 +FDO
    254.gap:     -Ofast -IPA:min_hotness=5 -OPT:alias=disjoint -CG:movnti=1 +FDO
    255.vortex:  -Ofast -OPT:goto=off +FDO
    256.bzip2:   basepeak=true
    300.twolf:   -O2 -CG:gcm=off:p2align_freq=100000
                 -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
                 -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
   Single-processor kernel was used
```