CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECint2000 = 1829

SPECint_base2000 = 1660

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Aug-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	95.4	1467	93.2	1502
175.vpr	1400	102	1369	94.2	1486
176.gcc	1100	56.9	1934	56.4	1950
181.mcf	1800	164	1097	153	1178
186.crafty	1000	59.6	1678	41.3	2419
197.parser	1800	126	1432	125	1444
252.eon	1300	47.7	2725	43.5	2988
253.perlbmk	1800	98.2	1833	92.8	1940
254.gap	1100	76.7	1434	68.8	1599
255.vortex	1900	78.6	2419	61.9	3068
256.bzip2	1500	111	1354	104	1444
300.twolf	3000	165	1823	157	1905

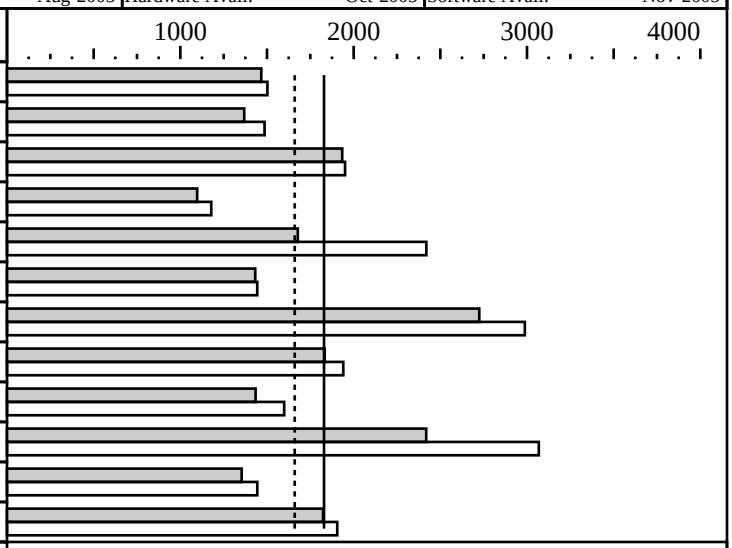

Hardware

CPU:	AMD Opteron (TM) 254
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2 (order by # of chips)
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (4x2GB, PC3200 CL3 DDR SDRAM ECC Registered)
Disk Subsystem:	SAS, 36GB, 10K RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 3/05 HW1
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

FDO:  PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
      fdo_pre0:  rm -rf ./feedback.profile


Integer base flags:
     Base tuning for C programs  : -fast  -xcrossfile -xalias_level=std +FDO ONESTEP=yes
     Base tuning for C++ programs: -fast  -xcrossfile -xarch=amd64 +FDO ONESTEP=yes

Integer peak flags:
 ONESTEP=yes +FDO for all benchmarks

 164.gzip:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 175.vpr:     -fast -xpagesize=2m -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign -lmopt -lm
 176.gcc:     -fast -xipo=2 -Wd,-iropt-prof -xalias_level=strong -xrestrict
 181.mcf:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 186.crafty:  -fast -xrestrict -xipo=2 -xprefetch -xarch=amd64 -xpagesize=2m
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -M /usr/lib/ld/map.bssalign -Wd,-iropt-prof -W2,-Ashort_ldst:ldld
                -W2,-Ainline:rs=50
 197.parser:   -fast -xpagesize=2m -xipo=2 -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign
 252.eon:      -fast -xipo=2 -qoption CC -iropt-prof -xvector -qoption iropt -Abcopy -xalias_level
                -xarch=amd64 -xrestrict -Qoption ube -xcallee=yes -xregs=frameptr
 253.perlbmk:  -fast -xcrossfile  -M /usr/lib/ld/map.bssalign -lbsdmalloc
 254.gap:      -fast -xipo=2 -Wd,-iropt-prof -xvector -W2,-Abcopy -lbsdmalloc -xprefetch
                -W2,-Ainline:cp=5:rs=1300:irs=3300:inc=100 -W2,-Arestrict_g
 255.vortex:  -fast -xipo=2 -Wd,-iropt-prof -lbsdmalloc -xrestrict -xprefetch -M /usr/lib/ld/map.bssalign
 256.bzip2:    -fast -xpagesize=2m -xcrossfile -xarch=sse2 -Xc -M /usr/lib/ld/map.bssalign -lbsdmalloc
 300.twolf:    -fast -xipo=2 -Wd,-iropt-prof -xrestrict -M /usr/lib/ld/map.bssalign

Portability:
 186.crafty:  -DUNIX -DHAS_LONGLONG -DLITTLE_ENDIAN_ARCH
 252.eon:     -DFMAX_IS_DOUBLE -DSPEC_CPU2000_LP64 -DUSE_STRERROR
 253.perlbmk: -DSPEC_CPU2000_SOLARIS_X86
 254.gap:     -DSYS_IS_USG -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPU using submit=pbind

Default BIOS setting was used ; Only one CPU was present on the system

This result was measured on Sun Fire X4100;
Sun Fire X4100 and Sun Fire X4200 are electronically equivalent.
```