CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4200

SPECint_rate2000 = 21.2

SPECint_rate_base2000 = 19.3

SPEC license #: 6 | Tested by: Sun Microsystems, Santa Clara | Test date: Aug-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

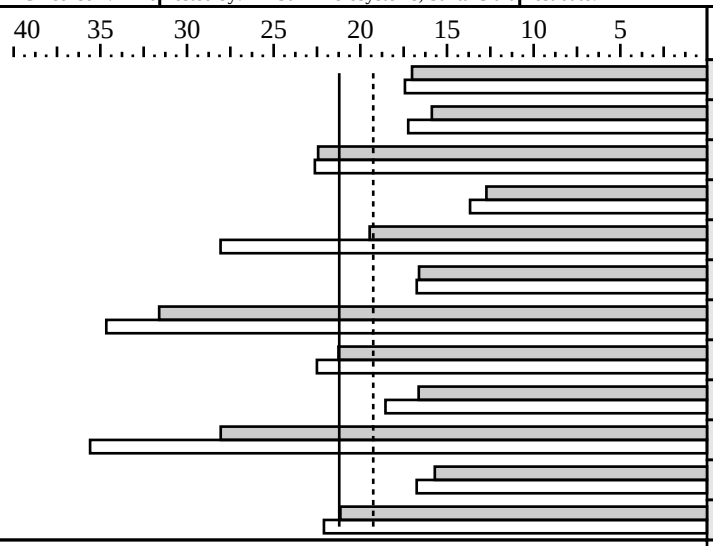

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	95.4	17.0	1	93.2	17.4
175.vpr	1	102	15.9	1	94.2	17.2
176.gcc	1	56.9	22.4	1	56.4	22.6
181.mcf	1	164	12.7	1	153	13.7
186.crafty	1	59.6	19.5	1	41.3	28.1
197.parser	1	126	16.6	1	125	16.7
252.eon	1	47.7	31.6	1	43.5	34.7
253.perlbmk	1	98.2	21.3	1	92.8	22.5
254.gap	1	76.7	16.6	1	68.8	18.5
255.vortex	1	78.6	28.1	1	61.9	35.6
256.bzip2	1	111	15.7	1	104	16.7
300.twolf	1	165	21.2	1	157	22.1

Hardware

CPU:	AMD Opteron (TM) 254
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2 (order by # of chips)
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8GB (4x2GB, PC3200 CL3 DDR SDRAM ECC Registered)
Disk Subsystem:	SAS, 36GB, 10K RPM
Other Hardware:	None

Software

Operating System:	Solaris 10 3/05 HW1
Compiler:	Sun Studio 11
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

FDO:  PASS1= -xprofile=collect:./feedback PASS2= -xprofile=use:./feedback
      fdo_pre0:  rm -rf ./feedback.profile


Integer base flags:
     Base tuning for C programs  : -fast  -xcrossfile -xalias_level=std +FDO ONESTEP=yes
     Base tuning for C++ programs: -fast  -xcrossfile -xarch=amd64 +FDO ONESTEP=yes

Integer peak flags:
 ONESTEP=yes +FDO for all benchmarks

 164.gzip:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 175.vpr:     -fast -xpagesize=2m -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign -lmopt -lm
 176.gcc:     -fast -xipo=2 -Wd,-iropt-prof -xalias_level=strong -xrestrict
 181.mcf:     -fast -xpagesize=2m -xcrossfile -M /usr/lib/ld/map.bssalign
 186.crafty:  -fast -xrestrict -xipo=2 -xprefetch -xarch=amd64 -xpagesize=2m
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -M /usr/lib/ld/map.bssalign -Wd,-iropt-prof -W2,-Ashort_ldst:ldld
                -W2,-Ainline:rs=50
 197.parser:   -fast -xpagesize=2m -xipo=2 -W2,-Ainline:inc=200:cs=500 -M /usr/lib/ld/map.bssalign
 252.eon:      -fast -xipo=2 -qoption CC -iropt-prof -xvector -qoption iropt -Abcopy -xalias_level
                -xarch=amd64 -xrestrict -Qoption ube -xcallee=yes -xregs=frameptr
 253.perlbmk:  -fast -xcrossfile  -M /usr/lib/ld/map.bssalign -lbsdmalloc
 254.gap:      -fast -xipo=2 -Wd,-iropt-prof -xvector -W2,-Abcopy -lbsdmalloc -xprefetch
                -W2,-Ainline:cp=5:rs=1300:irs=3300:inc=100 -W2,-Arestrict_g
 255.vortex:  -fast -xipo=2 -Wd,-iropt-prof -lbsdmalloc -xrestrict -xprefetch -M /usr/lib/ld/map.bssalign
 256.bzip2:    -fast -xpagesize=2m -xcrossfile -xarch=sse2 -Xc -M /usr/lib/ld/map.bssalign -lbsdmalloc
 300.twolf:    -fast -xipo=2 -Wd,-iropt-prof -xrestrict -M /usr/lib/ld/map.bssalign

Portability:
 186.crafty:  -DUNIX -DHAS_LONGLONG -DLITTLE_ENDIAN_ARCH
 252.eon:     -DFMAX_IS_DOUBLE -DSPEC_CPU2000_LP64 -DUSE_STRERROR
 253.perlbmk: -DSPEC_CPU2000_SOLARIS_X86
 254.gap:     -DSYS_IS_USG -DSYS_HAS_SIGNAL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPU using submit=pbind

Default BIOS setting was used ; Only one CPU was present on the system

This result was measured on Sun Fire X4100;
Sun Fire X4100 and Sun Fire X4200 are electronically equivalent.
```