CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro
PDSMi Motherboard

SPECint_rate2000 = 32.3

SPECint_rate_base2000 = 32.4

SPEC license #01176 | Tested by: Supermicro | Test date: Aug-2005 | Hardware Avail: Aug-2005 | Software Avail: Apr-2005

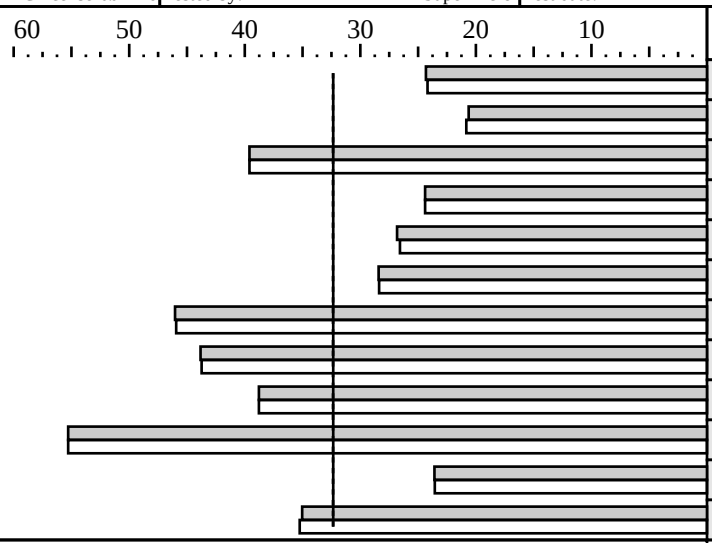

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	134	24.3	2	134	24.2
175.vpr	2	157	20.6	2	156	20.8
176.gcc	2	64.5	39.6	2	64.5	39.6
181.mcf	2	171	24.4	2	171	24.4
186.crafty	2	86.5	26.8	2	87.3	26.6
197.parser	2	147	28.4	2	147	28.4
252.eon	2	65.5	46.0	2	65.7	45.9
253.perlbmk	2	95.3	43.8	2	95.5	43.7
254.gap	2	65.8	38.8	2	65.8	38.8
255.vortex	2	79.7	55.3	2	79.7	55.3
256.bzip2	2	148	23.6	2	148	23.6
300.twolf	2	199	35.0	2	197	35.2

Hardware

CPU:	Intel Pentium D 840 Processor (3.2GHz, 800 MHz bus)
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD/core on chip
Secondary Cache:	1024KB/core on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 X 1024MB DDR2-667 ECC Unbuffered
Disk Subsystem:	1 X IDE Maxtor DiamondMax Plus 9 250GB
Other Hardware:	N/A

Software

Operating System:	Windows 2003 Enterprise Server
Compiler:	Intel C++ Compiler 9.0 Build 20050430Z (32-bit) Microsoft Visual Studio .Net 2003(for libraries) SmartHeap Library Version 7.4 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:   Approved stdcpp src.alt used
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

256.bzip2: -fast -Oa -Qunroll1 +FDO
300.twolf: -fast -O3 +FDO shlW32M.lib
New 32-bt Windows tools used, approved in May-2005
Tested system was built with Mini 1U SC512C-260 Chassis. Use only with Supermicro chassis recommended
Product description located as of:
http://www.supermicro.com/products/motherboard/DualCore/E7230/PDSMi.cfm
The system bus runs at 800MHz