# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

## IBM Corporation

IBM eServer xSeries x206m (2.8GHz Pentium D 820, 1MB L2 Cache)

SPECfp2000 = 1596

SPECfp_base2000 = 1576

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Sep-2005 | Hardware Avail: Sep-2005 | Software Avail: Jun-2005

| Benchmark | Reference Time | Base Runtime | Base Ratio | Runtime | Ratio |
|---|---|---|---|---|---|
| 168.wupwise | 1600 | 67.1 | 2384 | 67.1 | 2384 |
| 171.swim | 3100 | 121 | 2553 | 121 | 2554 |
| 172.mgrid | 1800 | 139 | 1296 | 139 | 1296 |
| 173.applu | 2100 | 146 | 1436 | 143 | 1469 |
| 177.mesa | 1400 | 112 | 1249 | 112 | 1248 |
| 178.galgel | 2900 | 119 | 2442 | 119 | 2442 |
| 179.art | 2600 | 83.1 | 3128 | 83.1 | 3128 |
| 183.equake | 1300 | 61.4 | 2118 | 53.5 | 2431 |
| 187.facerec | 1900 | 111 | 1716 | 111 | 1718 |
| 188.ammp | 2200 | 238 | 925 | 238 | 925 |
| 189.lucas | 2000 | 100 | 1992 | 98.5 | 2031 |
| 191.fma3d | 2100 | 156 | 1350 | 156 | 1350 |
| 200.sixtrack | 1100 | 197 | 559 | 197 | 559 |
| 301.apsi | 2600 | 244 | 1065 | 244 | 1065 |

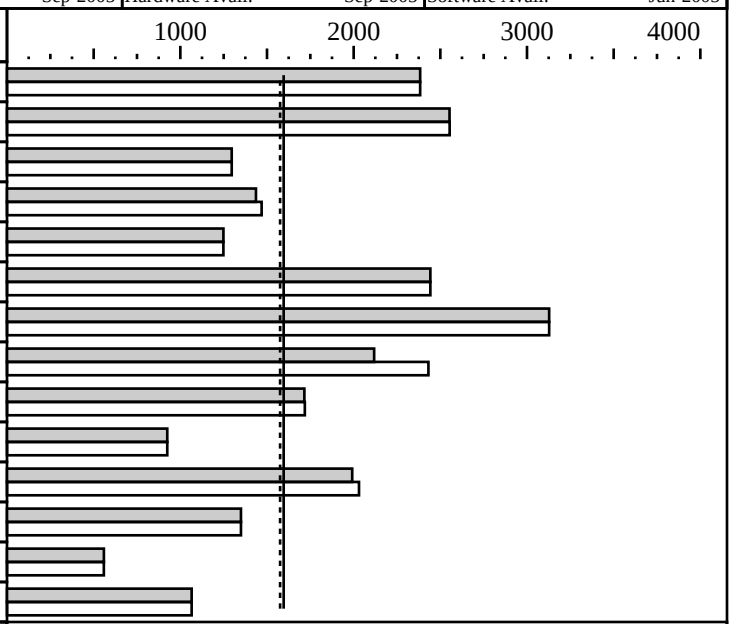


### Hardware

| | |
|---|---|
| CPU: | Intel Pentium D 820 (800 MHz system bus) |
| CPU MHz: | 2800 |
| FPU: | Integrated |
| CPU(s) enabled: | 2 cores, 1 chip, 2 cores/chip |
| CPU(s) orderable: | 1 |
| Parallel: | No |
| Primary Cache: | 12K(I) micro-ops + 16KB(D) (on chip) per core |
| Secondary Cache: | 1024KB(I+D) (on chip) per core |
| L3 Cache: | N/A |
| Other Cache: | N/A |
| Memory: | 4 x 1024 MB ECC PC2-3200 Single Rank |
| Disk Subsystem: | 73GB SAS 15K RPM |
| Other Hardware: | |

### Software

| | |
|---|---|
| Operating System: | Windows Server 2003 Standard Edition |
| Compiler: | Intel C/C++ Compiler 9.0 (20050624Z) for 32-bit applications<br>Intel Fortran Compiler 9.0 (20050624Z) for 32-bit applications<br>Microsoft Visual Studio .NET 13.0.9466 (for libraries)<br>MicroQuill Smartheap Library 7.30 |
| File System: | NTFS |
| System State: | Default |

## Notes/Tuning Information

```
GENERAL
  ONESTEP=yes
  +FDO:   PASS1=-Qprof_gen  PASS2=-Qprof_use
PORTABILITY
  178.galgel:   -FI /F32000000
  191.fma3d:    srcalt=windowsdp
BASE TUNING
  C/F77/F90:    -fast -Qansi_alias     +FDO
PEAK TUNING
  168.wupwise:  basepeak=yes
  171.swim:     -fast -f77rtl +FDO
  172.mgrid:    basepeak=yes
  173.applu:    -fast -Qscalar_rep- -Qauto -f77rtl +FDO
  177.mesa:     -fast +FDO
  178.galgel:      basepeak=yes
  179.art:      basepeak=yes
  183.equake:   -fast -Oa -Qrcd +FDO shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation



## Notes/Tuning Information (Continued)

```
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     basepeak=yes
189.lucas:    -fast
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo +FDO
301.apsi:     basepeak=yes
```