CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML570 G3 (3.0GHz, Intel dual-core Xeon)

SPECint2000 = 1360

SPECint_base2000 = 1353

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Sep-2005 | Hardware Avail: Oct-2005 | Software Avail: Jun-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	141	990	141	990
175.vpr	1400	159	880	155	905
176.gcc	1100	66.6	1651	66.6	1651
181.mcf	1800	137	1309	137	1310
186.crafty	1000	91.2	1096	91.3	1095
197.parser	1800	153	1179	152	1183
252.eon	1300	69.5	1869	68.9	1886
253.perlbmk	1800	105	1712	104	1725
254.gap	1100	75.8	1451	74.6	1474
255.vortex	1900	84.8	2240	84.8	2240
256.bzip2	1500	154	975	154	974
300.twolf	3000	197	1524	197	1524

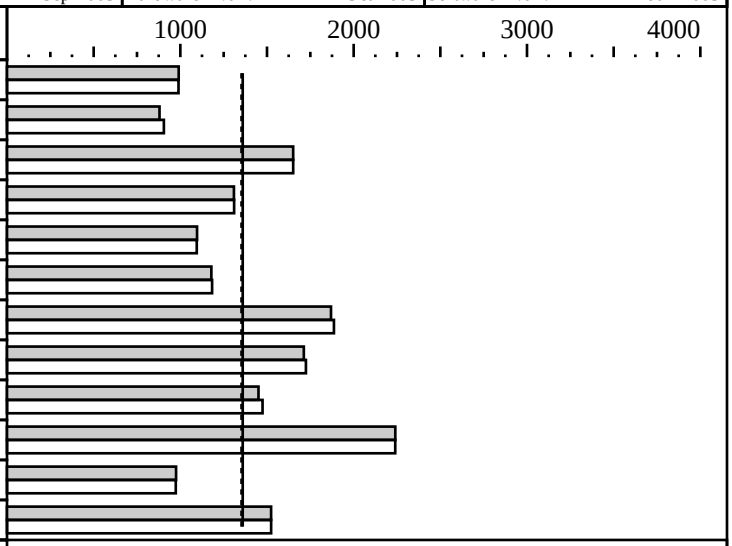

Hardware

CPU:	Intel dual-core Xeon (3.0GHz, 2x2MB L2, 667MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x1024MB PC2-3200
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.0 Build 20050624Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak = 1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  256.bzip2:    -fast -Oa -Qunroll1 +FDO  ONESTEP=yes shlw32M.lib
  300.twolf:    -fast               +FDO              shlw32M.lib
BIOS Configuration Notes
  Hyper-Threading Technology disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```