# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

## Supermicro
## X6DHR-3G2 Motherboard

SPECint2000 = 1763

SPECint_base2000 = 1767

SPEC license #01176 | Tested by: Supermicro | Test date: Oct-2005 | Hardware Avail: Sep-2005 | Software Avail: Apr-2005

| Benchmark | Reference Time | Base Runtime | Base Ratio | Runtime | Ratio |
|---|---|---|---|---|---|
| 164.gzip | 1400 | 113 | 1243 | 114 | 1224 |
| 175.vpr | 1400 | 117 | 1198 | 116 | 1209 |
| 176.gcc | 1100 | 52.2 | 2107 | 52.2 | 2107 |
| 181.mcf | 1800 | 98.7 | 1824 | 98.7 | 1824 |
| 186.crafty | 1000 | 72.8 | 1374 | 73.2 | 1366 |
| 197.parser | 1800 | 119 | 1518 | 119 | 1518 |
| 252.eon | 1300 | 55.2 | 2354 | 55.4 | 2346 |
| 253.perlbmk | 1800 | 80.4 | 2238 | 81.0 | 2223 |
| 254.gap | 1100 | 55.6 | 1978 | 55.6 | 1978 |
| 255.vortex | 1900 | 65.1 | 2920 | 65.1 | 2920 |
| 256.bzip2 | 1500 | 112 | 1339 | 113 | 1330 |
| 300.twolf | 3000 | 157 | 1908 | 157 | 1908 |

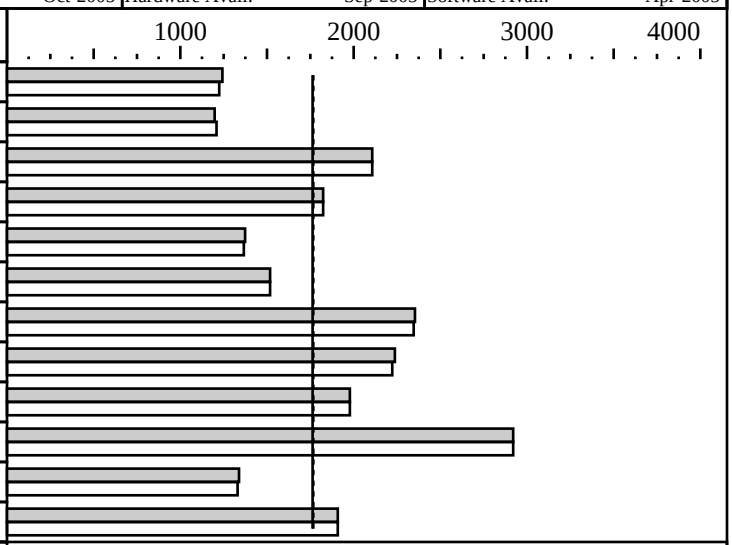


### Hardware

| | |
|---|---|
| CPU: | Intel Xeon Processor (3.80 GHz, 2MB L2, 800 MHz bus) |
| CPU MHz: | 3800 |
| FPU: | Integrated |
| CPU(s) enabled: | 1 core, 1 chip, 1 core/chip(Hyper-Threading Technology Disabled) |
| CPU(s) orderable: | 1 |
| Parallel: | No |
| Primary Cache: | 12k micro-ops I + 16KBD on chip |
| Secondary Cache: | 2048KB(I+D) on chip |
| L3 Cache: | N/A |
| Other Cache: | N/A |
| Memory: | 8 x 2.0GB SMART DDR2 400MHz ECC |
| Disk Subsystem: | 1 X 250GB Western Digital WD2500JD-00GBB0 SATA HDD |
| Other Hardware: | N/A |

### Software

| | |
|---|---|
| Operating System: | Windows Server 2003 EE w/SP1 |
| Compiler: | Intel C++ Compiler 9.0 Build 20050430Z (32-bit)<br>Microsoft Visual Studio .Net 2003(for libraries)<br>SmartHeap Library Version 7.4 from http://www.microquill.com/ |
| File System: | NTFS |
| System State: | Default |

## Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
shlW32M.lib is the SmartHeap Library
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:   Approved stdcpp src.alt used
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -fast -Qansi_alias -Oa  +FDO
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   -fast -Qansi_alias -Oa +FDO
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation



## Notes/Tuning Information (Continued)

```
255.vortex    basepeak=yes
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M.lib
New 32-bt Windows tools used, approved in May-2005
Tested system was built with SC813T-500 Chassis.
Product description located as of:
http://www.supermicro.com/products/motherboard/Xeon800/E7520/X6DHR-3G2.cfm
The system bus runs at 800MHz
```