CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro
X6DHP-3G2 Motherboard

SPECfp2000 = 1908

SPECfp_base2000 = 1903

SPEC license #01176 | Tested by: Supermicro | Test date: Oct-2005 | Hardware Avail: Sep-2005 | Software Avail: Apr-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	59.5	2688	59.8	2677
171.swim	3100	130	2382	130	2381
172.mgrid	1800	115	1564	115	1565
173.applu	2100	133	1574	131	1604
177.mesa	1400	86.0	1628	86.0	1628
178.galgel	2900	78.4	3699	78.3	3703
179.art	2600	59.0	4406	59.0	4406
183.equake	1300	47.4	2740	46.5	2796
187.facerec	1900	100	1896	100.0	1900
188.ammp	2200	185	1189	184	1197
189.lucas	2000	98.1	2038	98.0	2041
191.fma3d	2100	140	1500	140	1500
200.sixtrack	1100	148	745	148	746
301.apsi	2600	187	1393	189	1374

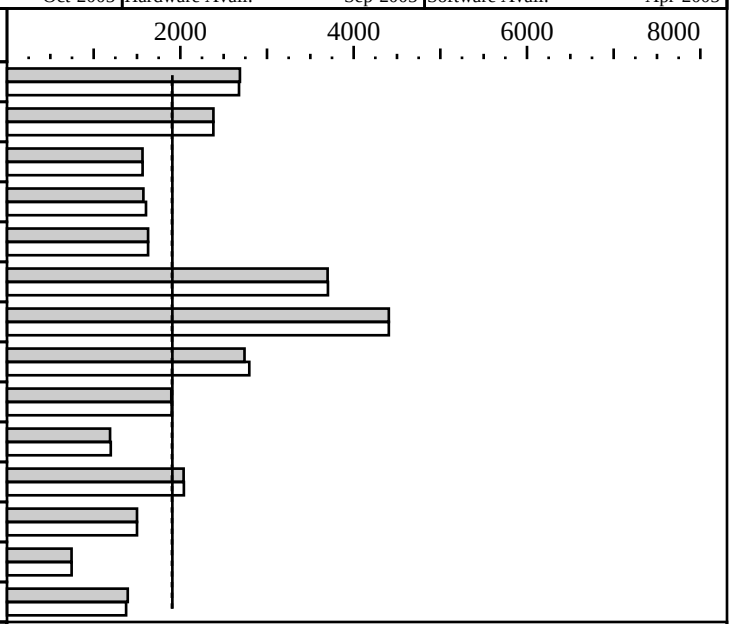

Hardware

CPU:	Intel Xeon Processor (3.80 GHz, 2MB L2, 800 MHz bus)
CPU MHz:	3800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology Disabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 2.0GB SMART DDR2 400MHz ECC
Disk Subsystem:	1 X 250GB Western Digital WD2500JD-00GBB0 SATA HDD
Other Hardware:	N/A

Software

Operating System:	Windows Server 2003 EE w/SP1
Compiler:	Intel C++ and Fortran Compiler 9.0 Build 20050430Z (32-bit) Microsoft Visual Studio .Net 2003(for libraries) SmartHeap Library Version 7.4 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs: -fast -Qansi_alias +FDO
Base tuning for C programs: -fast +FDO shlW32M.lib
shlW32M.lib is the SmartHeap Library
Portability:
178.galgel:   -FI /F32000000
191.fmma3d approved windowsdp src.alt used
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  -fast -Qscalar_rep- -Qauto  +FDO
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo shlW32M.lib +FDO
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
188.ammp:     -fast -Oa +FDO shlW32M.lib
189.lucas:    -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
New 32-bt Windows tools used, approved in May-2005
Tested system was built with SC816TQ-600 Chassis.
Product description located as of:
http://www.supermicro.com/products/motherboard/Xeon800/E7520/X6DHP-3G2.cfm
The system bus runs at 800MHz
```