CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E4900 (8 processor)

SPECint_rate2000 = 173

SPECint_rate_base2000 = 153

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Oct-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

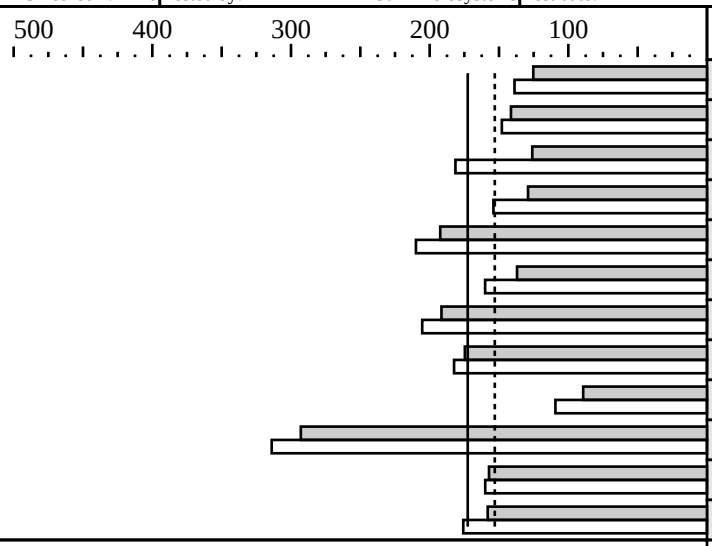

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	207	125	16	187	139
175.vpr	16	184	141	16	176	148
176.gcc	16	162	126	16	113	181
181.mcf	16	259	129	48	651	154
186.crafty	16	96.5	192	16	88.4	210
197.parser	16	244	137	16	209	160
252.eon	16	126	191	16	117	205
253.perlbmk	16	191	175	16	183	182
254.gap	16	229	89.3	48	560	109
255.vortex	16	120	293	16	112	314
256.bzip2	16	177	157	16	174	160
300.twolf	16	352	158	16	317	176

Hardware

CPU:	UltraSPARC IV+
CPU MHz:	1500
FPU:	Integrated
CPU(s) enabled:	16 cores, 8 chips, 2 cores/chip
CPU(s) orderable:	4, 8, 12 (order by number of chips)
Parallel:	No
Primary Cache:	64KBI+64KBD per core on chip (128KBI+128KBD on chip)
Secondary Cache:	2MB(I+D) per chip (on chip)
L3 Cache:	32MB(I+D) per chip (off chip)
Other Cache:	None
Memory:	48GB 16-way interleaved
Disk Subsystem:	Sun StorEdge D240 Media Tray (2x73GB) Sun StorEdge 6120 Array (14x73GB)
Other Hardware:	None

Software

Operating System:	Solaris 10
Compiler:	Sun Studio 11
File System:	ufs (default ufs logging on with Solaris 10)
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
    C: cc
  CXX: CC

Integer base flags:
  -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
  ONESTEP=yes for all benchmarks
  Profile feedback used for those marked with +FDO

  164.gzip:   -x04 -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp+filtering_margin=30,
              -Qeps:do_spec_load=1 +FDO
  175.vpr:    -fast -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,
              -Qeps:rp_filtering_margin=30 -xipo=2 -xpagesize_stack=8K
              -lmopt -lm +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  176.gcc:    -fast -xipo=2 -Wc,-Qicache-chbab=1 -Wc,-Qeps:enabled=1
              -Qeps:ws=32 -Wc,-Qdepgraph-early_cross_call=1
              -Wc,-Qms_pipe-pref_prolog -ll2amm +FDO
  181.mcf:    -fast -xipo=2 -xprefetch_level=2
  186.crafty: -fast -xpagesize=8k -xipo=2 -xalias_level=strong
              -W2,-Ashort_ldst -xinline= -xprefetch -xrestrict
              +FDO (-xlinkopt during pass2)
  197.parser: -fast -xipo=2 -xalias_level=strong -Wc,Qgsched-T6
              -Wc,-Qipa:valuepredicition -Wc,-Qms_pipe-prefstrong=0,
              -Qlp-pt=weak +FDO
  252.eon:    -fast -xipo=2 -xalias_level=compatible -Qoption cg
              -Qeps:enabled=1 -xvector -Qoption iropt -Abcopy -xunroll=16
              +FDO
  253.perlbmk:-fast -xipo -Wc,-Qeps:enabled=1,-Qeps:ws=16 -xalias_level=std
              -xsafe=mem -Wc,-Qiselect-funcalign=128,-Qicache-chbab=1
              -Wc,-Qiselect-sw_pf_tbl_th=40,-Qeps:do_spec_load=1 +FDO
  254.gap:    -fast -W2,-Abcopy -xvector -xprefetch_level=3 +FDO
  255.vortex: -fast -xrestrict -xipo=2 -Wc,-Qeps:enabled=1
              -W2,-Ainline:recursion=1:cs=400:irs=5000
              -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=64
              -Wc,-Qpeep-Sh0 -W2,-crit -xprefetch=latx:1.7 -fsimple=1
              -Wc,-Qiselect-sw_pf_tbl_th=30 -Wc,-Qicache-chbab=1
              -W2,-Ainline:inc=300 -ll2amm +FDO
  256.bzip2:  -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1 +FDO
  300.twolf:  -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp -xinline= +FDO

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:    rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  176.gcc:    -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
  186.crafty: -DSUN
  252.eon:    -DFMAX_IS_DOUBLE -library=iostream
  253.perlbmk:-DSPEC_CPU2000_SOLARIS
  254.gap:    -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

The system was configured with multiple file systems.  The O/S was
installed on one disk of the Sun StorEdge D240 Media Tray(ufs, ufs
w/logging).  The benchmark was run on the Sun StorEdge 6120 Array,
using H/W Raid 5 and ufs with ufs logging file system.
```