# CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

## IBM Corporation

IBM eServer xSeries 336 (2.8 GHz Dual-Core Xeon, 2MB L2 Cache)

SPECint_rate2000 = 59.9

SPECint_rate_base2000 = 59.4

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Nov-2005 | Hardware Avail: Nov-2005 | Software Avail: Jun-2005

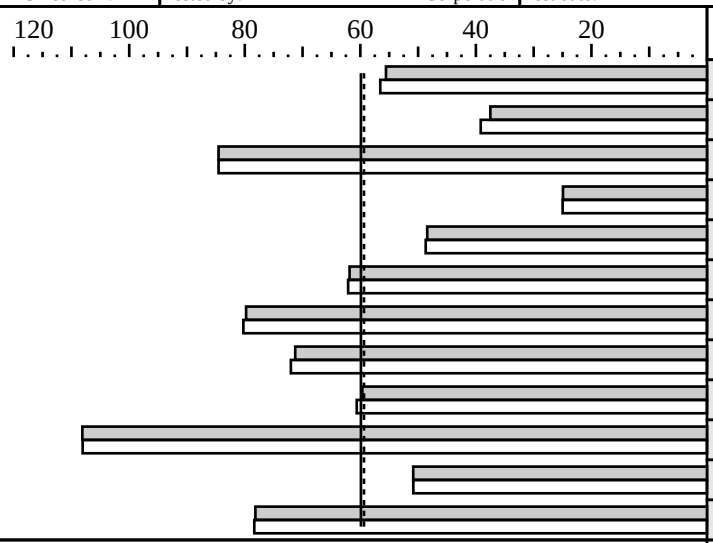


| Benchmark | Base Copies | Base Runtime | Base Ratio | Copies | Runtime | Ratio |
|---|---|---|---|---|---|---|
| 164.gzip | 8 | 234 | 55.6 | 8 | 230 | 56.5 |
| 175.vpr | 8 | 346 | 37.5 | 8 | 332 | 39.2 |
| 176.gcc | 8 | 121 | 84.5 | 8 | 121 | 84.5 |
| 181.mcf | 8 | 670 | 24.9 | 8 | 669 | 25.0 |
| 186.crafty | 8 | 192 | 48.4 | 8 | 191 | 48.7 |
| 197.parser | 8 | 270 | 61.9 | 8 | 269 | 62.1 |
| 252.eon | 8 | 151 | 79.8 | 8 | 150 | 80.2 |
| 253.perlbmk | 8 | 234 | 71.3 | 8 | 232 | 72.0 |
| 254.gap | 8 | 171 | 59.7 | 8 | 168 | 60.6 |
| 255.vortex | 8 | 163 | 108 | 8 | 163 | 108 |
| 256.bzip2 | 8 | 274 | 50.8 | 8 | 274 | 50.8 |
| 300.twolf | 8 | 356 | 78.2 | 8 | 355 | 78.4 |

### Hardware

| | |
|---|---|
| CPU: | 2.8GHz, Dual-Core Intel(R) Xeon(R) processor, 2x2MB L2, 800 MHz system bus |
| CPU MHz: | 2800 |
| FPU: | Integrated |
| CPU(s) enabled: | 4 cores, 2 chips, 2 cores/chip (Hyper-Threading Technology enabled) |
| CPU(s) orderable: | 1, 2 |
| Parallel: | No |
| Primary Cache: | 12K(I) micro-ops + 16KB(D) (on chip) per core |
| Secondary Cache: | 2048KB(I+D) (on chip) per core |
| L3 Cache: | N/A |
| Other Cache: | N/A |
| Memory: | 8 x 512 MB ECC PC2-3200 Single Rank |
| Disk Subsystem: | 73GB SCSI 15K RPM |
| Other Hardware: | |

### Software

| | |
|---|---|
| Operating System: | Windows Server 2003 Standard Edition |
| Compiler: | Intel C/C++ Compiler 9.0 (20050624Z) for 32-bit applications<br>Intel Fortran Compiler 9.0 (20050624Z) for 32-bit applications<br>Microsoft Visual Studio .NET 13.0.9466 (for libraries)<br>MicroQuill Smartheap Library 7.30 |
| File System: | NTFS |
| System State: | Default |

## Notes/Tuning Information

```
GENERAL
  ONESTEP=yes
  +FDO:   PASS1=-Qprof_gen  PASS2=-Qprof_use
PORTABILITY FLAGS
  176.gcc:     -Dalloca=_alloca /F10000000
  186.crafty:  -DNT_i386
 252.eon:    srcalt=stdcpp
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
BASE TUNING
  C:           -fast -Qansi_alias +FDO shlW32M.lib
  C++:         -fast -Qcxx_features +FDO shlW32M.lib
PEAK TUNING
  164.gzip:    -fast +FDO
  175.vpr:     -fast +FDO
  176.gcc:     basepeak=yes
  181.mcf:     -fast +FDO shlW32M.lib
  186.crafty:  -fast -Oa +FDO shlW32M.lib
  197.parser:  -fast +FDO
  252.eon:     -fast +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation



## Notes/Tuning Information (Continued)

```
    253.perlbmk: -fast -Oa +FDO shlW32M.lib
    254.gap:     -fast +FDO
    255.vortex   -fast +FDO shlw32M.lib
    256.bzip2:   -fast -Qunroll1 -Oa +FDO shlw32M.lib
    300.twolf:   -fast +FDO shlW32M.lib
  EXTRA LIBRARIES
    shlW32M.lib: MicroQuill SmartHeap Library 7.3
                 www.microquill.com
```