CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 280)

SPECint_rate2000 = 19.4

SPECint_rate_base2000 = 17.4

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Sep-2005

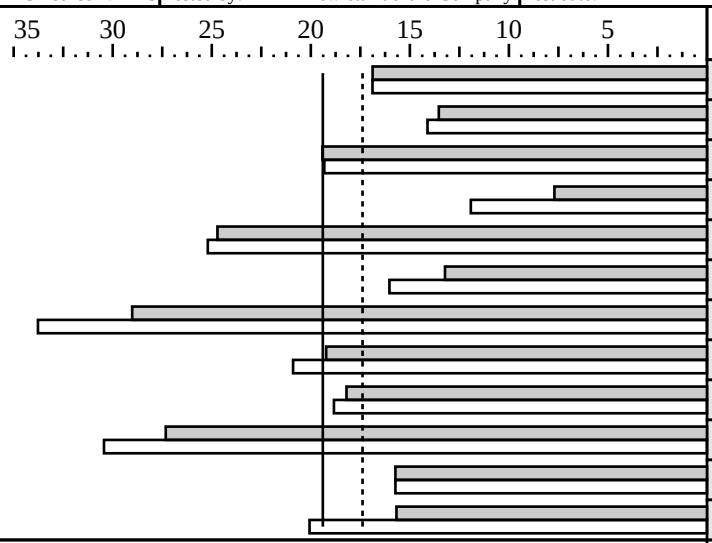

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	96.2	16.9	1	96.2	16.9
175.vpr	1	120	13.5	1	115	14.1
176.gcc	1	65.7	19.4	1	66.0	19.3
181.mcf	1	271	7.70	1	175	11.9
186.crafty	1	46.9	24.7	1	46.0	25.2
197.parser	1	158	13.2	1	130	16.0
252.eon	1	52.0	29.0	1	44.7	33.8
253.perlbmk	1	109	19.2	1	99.9	20.9
254.gap	1	70.1	18.2	1	67.8	18.8
255.vortex	1	80.7	27.3	1	72.4	30.4
256.bzip2	1	111	15.7	1	111	15.7
300.twolf	1	222	15.7	1	173	20.1

Hardware

CPU:	AMD Opteron (TM) 280
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 2 SuSE kernel 2.6.5-7.191-default
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.2.1
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
Base tuning for C programs:   -Ofast +FDO
Base tuning for C++ programs: -Ofast +FDO
Portability flags:
  186.crafty:  -DLINUX_i386
  252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64
  253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
               -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
  254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
  255.vortex:  -DSPEC_CPU2000_LP64
Peak tuning:
  164.gzip:    -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
  175.vpr:     -O3 -ipa -m32 +FDO
  176.gcc:     -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
  181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
  186.crafty:  -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
  197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
  252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
               -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exceptions
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
    253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
                -fno-math-errno -IPA:plimit=10000 +FDO
    254.gap:    -Ofast -IPA:min_hotness=5 -OPT:alias=disjoint -CG:movnti=1 +FDO
    255.vortex: -Ofast -OPT:goto=off +FDO
    256.bzip2:  basepeak=true
    300.twolf:  -O2 -CG:gcm=off:p2align_freq=100000
                -OPT:Ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
                -WOPT:mem_opnds=on -m32 +FDO
 BIOS Configuration Notes
   Node Interleaving Disabled
 Other Configuration Notes
    Single-processor kernel was used

Submitted_by: "Schmidt, David (Performance Eng.)" <D.Schmidt@hp.com>
Submitted: Tue Nov 22 15:43:19 2005
Submission: cpu2000-20051114-05054.sub
```