CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS M440, Intel dual-core Pentium D 820

SPECint2000 = 1323

SPECint_base2000 = 1321

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2005 | Hardware Avail: Jul-2005 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	149	937	150	935
175.vpr	1400	164	855	161	870
176.gcc	1100	69.0	1595	69.3	1587
181.mcf	1800	132	1359	132	1359
186.crafty	1000	96.4	1038	96.4	1038
197.parser	1800	161	1120	161	1121
252.eon	1300	73.8	1761	73.8	1761
253.perlbmk	1800	107	1684	107	1683
254.gap	1100	70.4	1563	69.9	1574
255.vortex	1900	83.6	2272	83.6	2272
256.bzip2	1500	157	956	157	956
300.twolf	3000	217	1385	216	1386

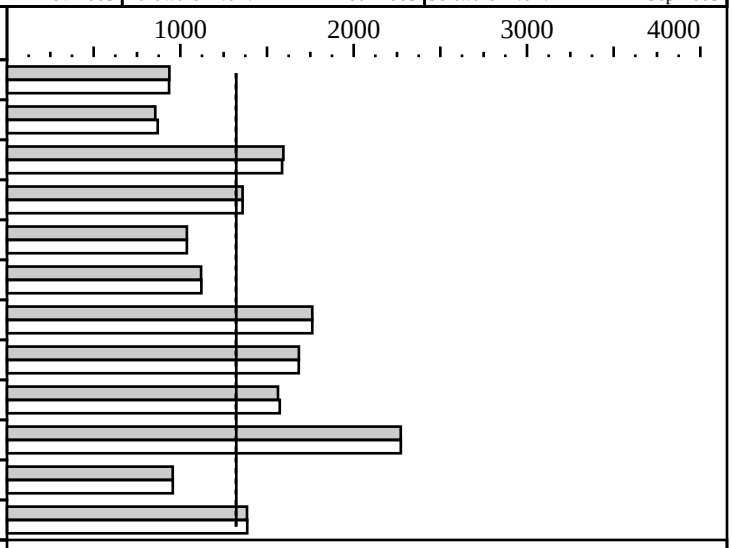

Hardware

CPU:	Intel dual-core Pentium D processor 820
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip, per core
Secondary Cache:	1024KB(I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 GB (4x1 GB DDR2-533, 2rank, CL4-4-4, with ECC)
Disk Subsystem:	Serial ATA 7200 rpm
Other Hardware:	

Software

Operating System:	Windows XP Professional, Service Pack 2
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.0, - Build 20050912Z Package ID: W_CC_C_9.0.024 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library 7.4
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
Portability flags:
 176.gcc:     -Dalloca=_alloca /F10000000
 186.crafty:  -DNT_i386
 253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
 254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO shlW32M.lib
 for C++ program 252.eon:
 -fast -Qcxx_features +FDO

Peak Tuning Flags:
 164.gzip:     -fast +FDO
 175.vpr:      -fast +FDO
 176.gcc:      -fast +FDO
 181.mcf:      -fast +FDO shlW32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 186.crafty:    -fast +FDO
 197.parser:    -fast +FDO
 252.eon:       -fast -Qcxx_features +FDO
 253.perlbmk:   -fast +FDO shlW32M.lib
 254.gap:       -fast +FDO
 255.vortex     -fast +FDO shlW32M.lib
 256.bzip2:     -fast +FDO
 300.twolf:     -fast +FDO shlW32M.lib

Extra Libraries:
 shlW32M.lib = Microquill SmartHeap Library 7.4
 see www.microquill.com

The system bus runs at 800 MHz

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```