CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM

IBM eServer 326m, 2.8 GHz AMD Opteron(tm) Processor 254

SPECfp2000 = 2223

SPECfp_base2000 = 2007

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Nov-2005 | Hardware Avail: Nov-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	58.1	2754	51.0	3140
171.swim	3100	125	2487	118	2623
172.mgrid	1800	99.8	1804	93.4	1926
173.applu	2100	98.0	2142	89.0	2359
177.mesa	1400	62.8	2230	59.1	2370
178.galgel	2900	88.2	3288	78.7	3686
179.art	2600	97.8	2660	69.3	3751
183.equake	1300	78.9	1647	71.1	1828
187.facerec	1900	73.1	2598	70.3	2702
188.ammp	2200	136	1619	129	1712
189.lucas	2000	99.6	2009	89.9	2225
191.fma3d	2100	129	1624	124	1692
200.sixtrack	1100	135	813	113	977
301.apsi	2600	143	1817	138	1880

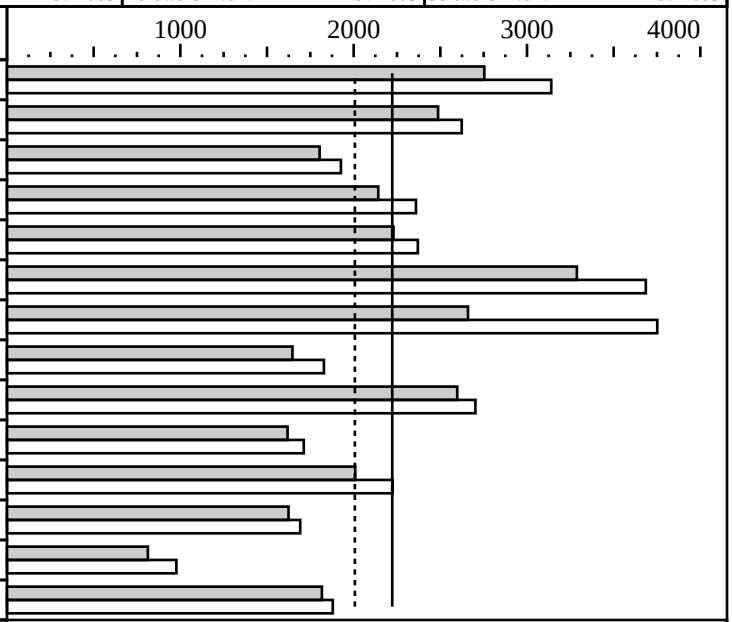

Hardware

CPU:	AMD Opteron(tm) Processor 254
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 1024GB PC3200
Disk Subsystem:	SCSI, 36GB 15K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP2 SLES 64 bit Kernel 2.6.5-7.191-smp (SP2)
Compiler:	PathScale EKO Compiler Suite, Release 2.2.1 AMD Core Math Library 2.5.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 +ACML: Linked with AMD Core Math Library
 Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
 Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex +FDO
 Portability flags:
   178.galgel:    -fixedform
 Peak tuning:
   168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                  -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                  -IPA:linear=on:plimit=50000:callee_limit=5000
                  -INLINE:aggressive=on
   171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:     -Ofast -CG:gcm=off:cflow=on -OPT:IEEE_a=3:unroll_size=200
                  -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
      -WOPT:memopnds=on:aggstr=0
   173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                  -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
    178.galgel:    -Ofast -OPT:fast_complex +ACML +FDO
    179.art:       -O3 -OPT:ofast -fno-math-errno -mno-sse2 -m32
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
    187.facerec:   -Ofast -LNO:fusion=2
                   -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 -LNO:prefetch=0 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:memopnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=60000:early_intrinsics=on
       -fno-math-errno -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Taskset utility used to bind process to CPU(s)
```