CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM

IBM eServer 326m, 1.8 GHz Dual Core AMD Opteron(tm) Processor 265

SPECint_rate2000 = 59.2

SPECint_rate_base2000 = 52.6

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Jan-2005

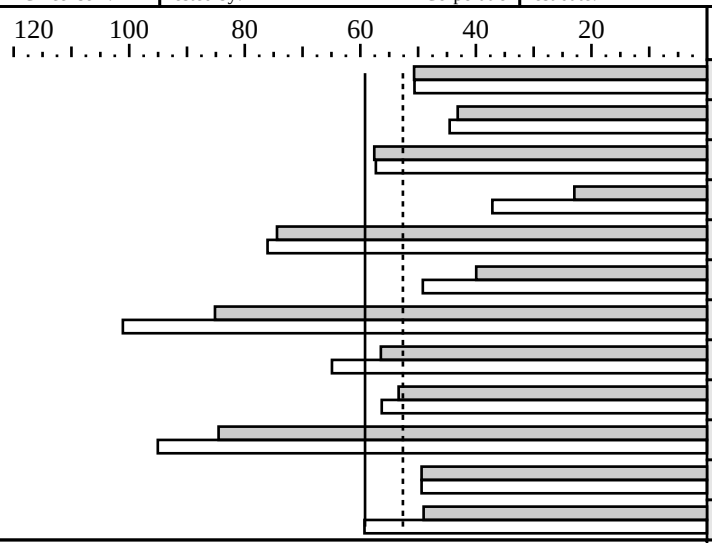

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	128	50.7	4	128	50.6
175.vpr	4	151	43.1	4	146	44.5
176.gcc	4	88.6	57.6	4	89.1	57.3
181.mcf	4	364	23.0	4	225	37.1
186.crafty	4	62.3	74.4	4	61.0	76.1
197.parser	4	209	39.9	4	170	49.2
252.eon	4	70.8	85.2	4	59.7	101
253.perlbmk	4	148	56.4	4	129	64.9
254.gap	4	95.6	53.4	4	90.7	56.3
255.vortex	4	104	84.5	4	92.7	95.1
256.bzip2	4	141	49.4	4	141	49.4
300.twolf	4	284	49.0	4	235	59.3

Hardware

CPU:	Dual Core AMD Opteron(tm) Processor 265
CPU MHz:	1800
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 1024GB PC3200
Disk Subsystem:	SCSI, 36GB 15K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP2 SLES 64 bit Kernel 2.6.5-7.191-smp (SP2)
Compiler:	PathScale EKO Compiler Suite, Release 2.2.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
 Base tuning for C programs:   -Ofast +FDO
 Base tuning for C++ programs: -Ofast +FDO
 Portability flags:
   186.crafty:  -DLINUX_i386
   252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64
   253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
   254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
   255.vortex:  -DSPEC_CPU2000_LP64
 Peak tuning:
   164.gzip:    -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
   175.vpr:     -O3 -ipa -m32 +FDO
   176.gcc:     -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
   181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
   186.crafty:  -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
   197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
   252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exception
                -LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
  253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
                -fno-math-errno -IPA:plimit=10000 +FDO
  254.gap:     -Ofast -IPA:min_hotness=5 -OPT:alias=disjoint -CG:movnti=1 +FDO
  255.vortex:  -Ofast -OPT:goto=off +FDO
  256.bzip2:   basepeak=true
  300.twolf:   -O2 -CG:gcm=off:p2align_freq=100000
                -OPT:ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
                -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
   Taskset utility used to bind process to CPU(s)
```