CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM

IBM eServer 326m, 2.2 GHz Dual Core AMD Opteron(tm) Processor 275

SPECint2000 = 1573

SPECint_base2000 = 1389

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	105	1338	105	1336
175.vpr	1400	124	1125	120	1163
176.gcc	1100	72.5	1517	72.0	1528
181.mcf	1800	271	663	164	1096
186.crafty	1000	51.0	1960	50.0	1999
197.parser	1800	179	1006	143	1258
252.eon	1300	57.9	2247	48.6	2674
253.perlbmk	1800	122	1476	106	1699
254.gap	1100	75.4	1460	72.5	1517
255.vortex	1900	86.6	2193	77.2	2460
256.bzip2	1500	117	1278	117	1278
300.twolf	3000	236	1273	186	1616

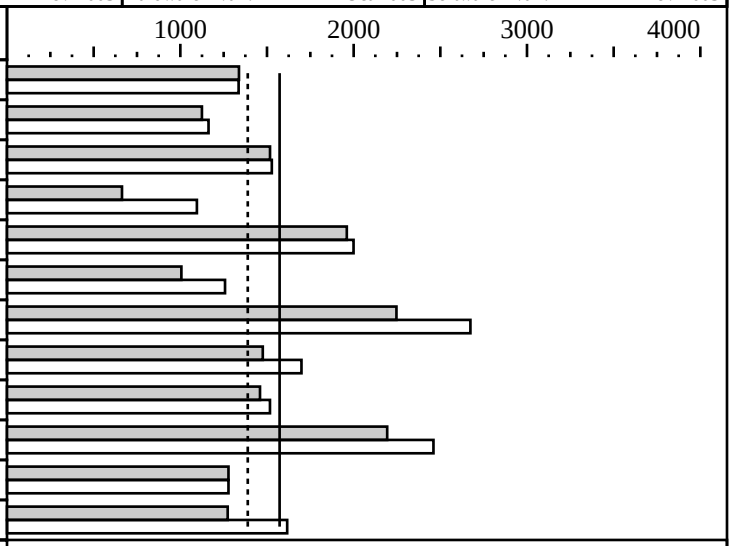

Hardware

CPU:	Dual Core AMD Opteron(tm) Processor 275
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 1024GB PC3200
Disk Subsystem:	SCSI, 36GB 15K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP2 SLES 64 bit Kernel 2.6.5-7.191-smp (SP2)
Compiler:	PathScale EKO Compiler Suite, Release 2.2.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
 Base tuning for C programs:   -Ofast +FDO
 Base tuning for C++ programs: -Ofast +FDO
 Portability flags:
   186.crafty:  -DLINUX_i386
   252.eon:     -DHAS_ERRLIST -DSPEC_CPU2000_LP64
   253.perlbmk: -DSPEC_CPU2000_LINUX_I386 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_GLIBC22 -DSPEC_CPU2000_LP64
   254.gap:     -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO
                -DSYS_HAS_CALLOC_PROTO -DSPEC_CPU2000_LP64
   255.vortex:  -DSPEC_CPU2000_LP64
 Peak tuning:
   164.gzip:    -O3 -ipa -WOPT:val=0 -OPT:unroll_size=0 +FDO
   175.vpr:     -O3 -ipa -m32 +FDO
   176.gcc:     -O3 -IPA:plimit=10000 -LNO:opt=0 -OPT:goto=off +FDO
   181.mcf:     -O3 -ipa -IPA:field_reorder=on -m32 +FDO
   186.crafty:  -Ofast -CG:local_fwd_sched=on -LNO:opt=0 -WOPT:val=0 +FDO
   197.parser:  -O3 -ipa -m32 -IPA:ctype=on +FDO
   252.eon:     -Ofast -CG:gcm=off:p2align_freq=1:prefetch=off -IPA:plimit=4000
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -OPT:treeheight=on -TENV:X=4:frame_pointer=off -fno-exception
                -LNO:fu=10:full_unroll_outer=on -GRA:optimize_boundary=on +FDO
  253.perlbmk: -O2 -ipa -OPT:Ofast:transform_to_memlib=off
                -fno-math-errno -IPA:plimit=10000 +FDO
  254.gap:     -Ofast -IPA:min_hotness=5 -OPT:alias=disjoint -CG:movnti=1 +FDO
  255.vortex:  -Ofast -OPT:goto=off +FDO
  256.bzip2:   basepeak=true
  300.twolf:   -O2 -CG:gcm=off:p2align_freq=100000
                -OPT:ofast:unroll_times_max=8:unroll_size=256:alias=disjoint
                -WOPT:mem_opnds=on -m32 +FDO
BIOS Configuration Notes
  Node Interleaving Disabled
Other Configuration Notes
   Taskset utility used to bind process to CPU(s)
```